

**Airborne Geophysical Survey
Back Creek & Denison Area, Tasmania**

October 2007

Survey Operations and Logistics Report

For

LEFROY RESOURCES

Survey Flown by:



GPX Airborne

Job 2290

1	GENERAL SURVEY INFORMATION	4
1.1	INTRODUCTION.....	4
1.2	SURVEY BRIEF.....	4
1.3	SURVEY PERSONNEL.....	4
1.4	SURVEY EQUIPMENT.....	5
1.5	SURVEY AREA	5
1.6	FLIGHT PATH	6
1.7	SURVEY PARAMETERS.....	6
2	SURVEY EQUIPMENT SPECIFICATIONS.....	7
2.1	DATA ACQUISITION CONSOLE.....	7
2.1.1	<i>Navigation / Flight Control</i>	<i>7</i>
2.1.2	<i>Data Recording</i>	<i>8</i>
2.1.3	<i>Display of real-time collected Data and status monitoring</i>	<i>8</i>
2.1.4	<i>Data Retrieval.....</i>	<i>8</i>
2.2	MAGNETOMETER PROCESSOR	8
2.3	MAGNETOMETER SENSOR	9
2.4	FLUXGATE MAGNETOMETER	9
2.5	SPECTROMETER	10
2.6	TEMPERATURE AND HUMIDITY SENSORS.....	10
2.7	BAROMETRIC PRESSURE SENSOR.....	10
2.8	RADAR ALTIMETER.....	11
2.9	GPS/DGPS RECEIVER	11
2.10	GEM GSM-19W OVERHAUSER MAGNETOMETER	11
2.10.1	<i>Base Station Location.....</i>	<i>12</i>
3	EQUIPMENT CALIBRATIONS AND DATA ACQUISITION CHECKS ..	13
3.1	DYNAMIC MAGNETOMETER COMPENSATION	13
3.2	HEADING ERROR CHECK	13
3.3	SYSTEM PARALLAX TESTS	13
3.4	ALTIMETER CALIBRATIONS	14
3.5	RADIOMETRIC PRE SURVEY CALIBRATIONS	14
3.6	DAILY RADIOMETRIC CHECKS	14
3.7	DAILY TIME SYNCHRONIZATION	15
3.8	SURVEY LINE NUMBERING SYSTEM	15
4	DATA VERIFICATION AND FINAL PROCESSING	16
4.1	IN FIELD DATA PROCESSING	16
4.1.1	<i>Altimeter Data.....</i>	<i>16</i>
4.1.2	<i>Flight Path Data.....</i>	<i>16</i>
4.1.3	<i>Magnetic Data</i>	<i>16</i>
4.1.4	<i>Radiometric Data.....</i>	<i>17</i>
4.1.5	<i>Digital Archives.....</i>	<i>18</i>
4.2	FINAL PROCESSING.....	19
4.2.1	<i>Final Processing of Altimeter Data</i>	<i>19</i>
4.2.2	<i>Final Processing of Magnetic Data.....</i>	<i>20</i>
4.2.3	<i>Final Processing of Radiometric Data</i>	<i>21</i>
4.2.4	<i>Digital Archives.....</i>	<i>23</i>
5	IMAGES	24

5.1	TOTAL MAGNETIC INTENSITY IMAGE.....	24
5.2	TOTAL MAGNETIC INTENSITY 1 ST VERTICAL DERIVATIVE IMAGE	25
5.3	TOTAL COUNT IMAGE	26
6	CONTRACTOR INFORMATION.....	27
7	APPENDIX A: FINAL LOCATED DATA FORMAT.....	28
7.1	MAGNETIC DATA (BACK CREEK).....	28
7.2	RADIOMETRIC DATA (BACK CREEK).....	30
7.3	MAGNETIC DATA (DENISON)	31
7.4	RADIOMETRIC DATA (DENISON).....	34

1 GENERAL SURVEY INFORMATION

1.1 INTRODUCTION

In March 2007, GPX Airborne commenced a fixed wing airborne magnetic and radiometric survey for Lefroy Resources in North East Tasmania. The survey was initially flown using a Cessna 210 owned and operated by Ozshore Pty Ltd. This report summarizes the procedures, details and equipment used by GPX Airborne in the acquisition, verification and processing of the airborne geophysical data.

Client:	Lefroy Resources
GPX Job Number:	2290
Survey Area:	Back Creek & Denison, Tasmania
Data Processing Bases:	St Helens
Production:	21 st March 2007 to 20 th April 2007
Line km surveyed:	
- Denison:	3321.9 km
- Back Creek:	663.8 km
Total:	3985.7 km

1.2 SURVEY BRIEF

Aircraft equipment installation, ground tests and radiometric calibration flights were carried out during August 2006 in Perth, Western Australia. The crew mobilised to Tasmania in early March to commence a survey for Geoscience Australia. This survey for Lefroy Resources was flown as in-fill whilst conducting the survey for Geoscience Australia. Flying for Lefroy commenced on 21st March 2007 and was completed on 20th April 2007.

Throughout the survey system stability and continuity had been monitored.

1.3 SURVEY PERSONNEL

The following personnel were involved on this project:

Operations and Safety Manager:	Bob Blizzard
Project Leaders	Don Copley
Technical Support:	Bob Taylor
	Mike Barrett
Operators:	Don Copley
	Tim Cousins
Pilots:	Noel Fuller
	Guy Nash
	Vincent Wong
Data Processing:	Cathy Car

1.4 SURVEY EQUIPMENT

Survey Platform	Cessna 210 (VH-MNN)
Data Acquisition System	Pico Envirotec AGIS PC104 Console
Magnetometer Processor	Pico Envirotec MMS4 Magnetometer Processor
Magnetometer	Geometrics G-822A Cesium Vapour
Spectrometer	Exploranium GR820 (32 Litre Crystal)
Fluxgate Magnetometer	Billingsley TFM100-G2
GPS / DGPS Receiver	CSI DGPSMax
Radar Altimeter	Collins ALT-50A
Magnetic Base Stations	Gem Systems GSM-19W
In-field Computer	Toshiba Notebook
In-field Software	Pico Envirotec PEIView, ChrisDBF




VH-MNN at St Helens.

1.5 SURVEY AREA

The following coordinates are in GDA94 / Map Grid of Australia zone 55 and defines the survey area.

Back Creek		Denison	
EASTING	NORTHING	EASTING	NORTHING
502565.7	5457992.1	517909	5458531
510710.5	5457992.1	533241	5458464
510710.5	5451476.3	533161	5440784
502694.2	5451476.3	523112	5440784
		523112	5435584
		517906	5435584

1.6 FLIGHT PATH

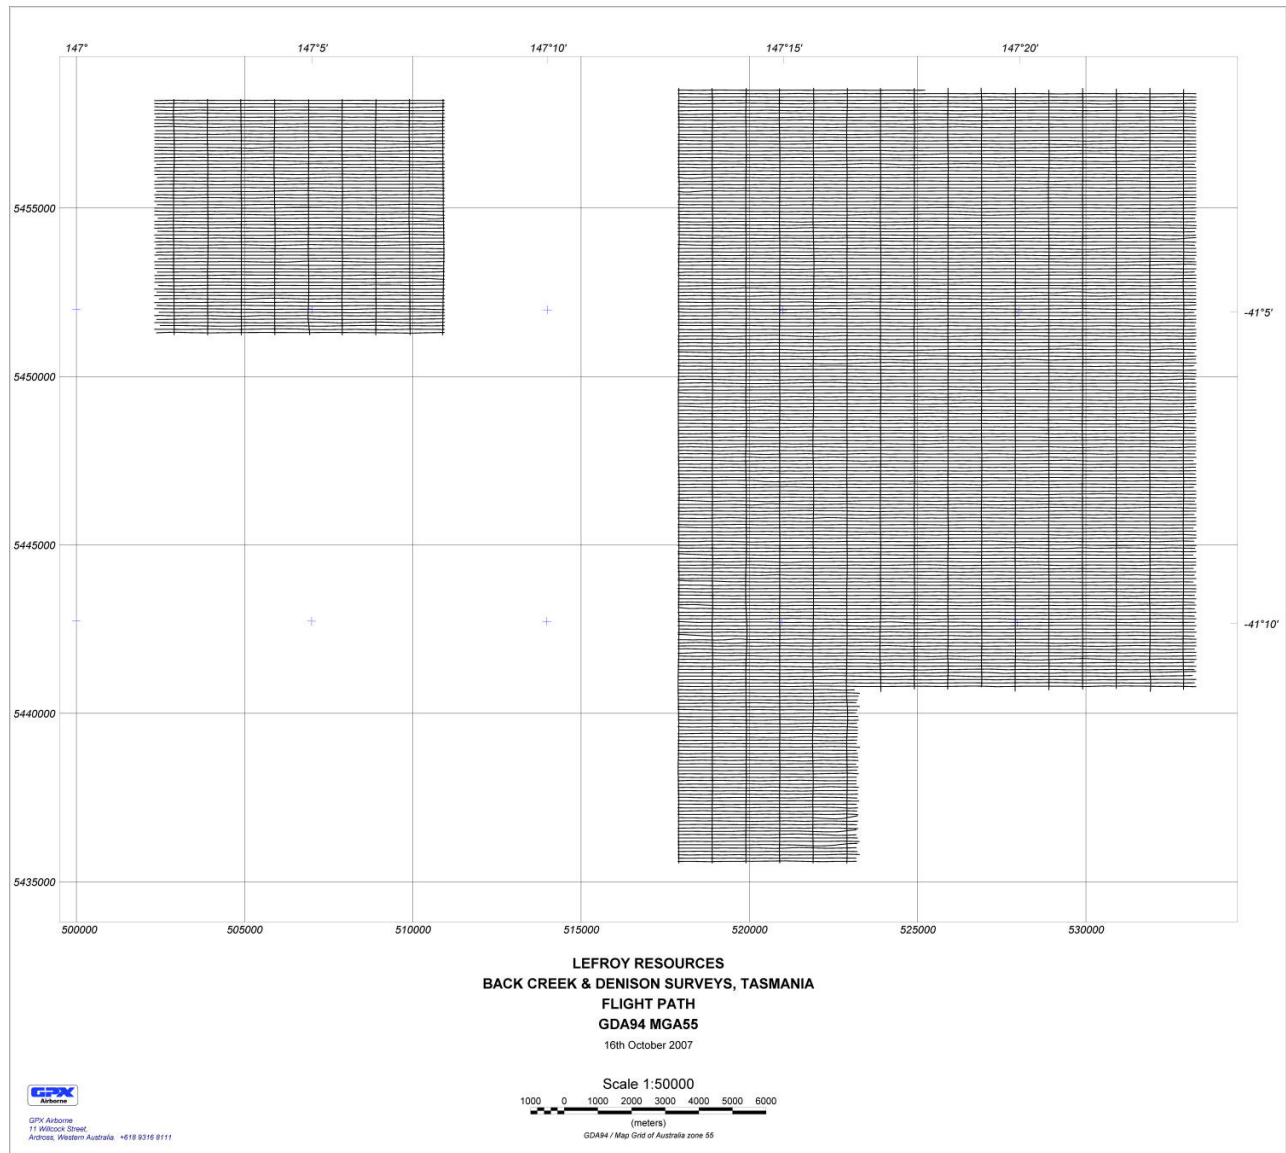

1.7 SURVEY PARAMETERS

Line spacing:	100 metres
Line direction:	000° and 180°
Tie line spacing:	1000 metres
Tie line direction:	090° and 270°
Minimum line length:	5000 metres
Sensor height:	90 metres
Magnetometer sample rate:	10 Hz
Spectrometer sample rate:	1 Hz recording 256 channels
Altimeter sample rate:	10 Hz
Base magnetometer sample rate:	1 Hz

2 SURVEY EQUIPMENT SPECIFICATIONS

2.1 DATA ACQUISITION CONSOLE

The Data Acquisition console is a Pico Envirotec AGIS PC104. This is a versatile multi-function system that is capable of operation in many different configurations, depending on platform type, navigation and system requirements. The AGIS PC104 provides the following functions:

- Navigation / flight control
- Data recording
- Display of real-time collected data and status monitoring
- Data retrieval access



Real time monitor and navigation console.

2.1.1 Navigation / Flight Control

The AGIS PC104 is used to guide the aircraft on a pre-defined flight plan that can be generated in UTM or Latitude/Longitude coordinates. The pre-defined flight plan can be designed to file prior to the start of the project, entered or altered in the AGIS system or delineated 'on-the-fly' e.g. while in the air flying the boundary and entering corner coordinates. Co-ordinates can only be entered in the WGS84 datum system, this has been implemented to avoid confusion and eliminate possible conversion errors. Normal survey altitude and ground speed, with pre-set tolerances are also entered.

The pilot display consisted of a 2-line strip display or more comprehensive Pilot Guidance Unit (PGU). The strip display is driven directly from the AGIS

PC104 console; whereas the PGU is a self-contained computer system that is capable of more demanding navigation functions such as “drape” flying using a pre-programmed altitude grid.

The desired flight line is selected from the operator interface, which will either be a keyboard or touch-screen.

2.1.2 Data Recording

The AGIS PC104 relates all acquired data to the instant position from the GPS receiver and records the collected data to three separate data files. The data is recorded in compressed binary format, to a commercial solid-state hard disk.

The flight path file is recorded from AGIS program start-up to shutdown and cannot be turned off by the operator. It contains position, timing, altitude and basic data.

The data file is recorded whenever the acquisition system is “On-line”. It contains all navigation data plus “enabled” data.

The raw data file, when enabled and supported by the GPS receiver in use, contains raw GPS data necessary for post-flight position correction. It is recorded from AGIS program start-up to shutdown.

2.1.3 Display of real-time collected Data and status monitoring

The AGIS displays flight path and geophysical data as it is acquired aiding the data quality control and real time navigation guidance. The user is presented with graphical representations of the survey area, flight lines, navigation status, and sensor data. The spectra data was also displayed.

Several other status indications are also provided which will either change state indicating a major system malfunction, such as a magnetometer or spectrometer failure, or will change state during normal operation, indicating data being written to a file etc

2.1.4 Data Retrieval

The AGIS PC104 provides facility to transfer the recorded data from the internal solid-state disk to compact flash media immediately following the completion of the survey flight. Recorded data is not deleted from the main disk until this “retrieved” data has been verified “error free”.

2.2 MAGNETOMETER PROCESSOR

The Magnetometer Processor is a Pico Envirotec MMS4 Magnetometer Processor. This is an advanced frequency-measuring device that can support several continuous signal magnetometers (Cs, He, K). It is a hardware-software designed system, exhibiting simplicity, easy interfacing and substantial versatility. Magnetometer readings are synchronized with the PPS (Pulse Per Second) signal derived from the GPS for accurate timing.

The MMS4 contains 8 channels of analog differential inputs. The first 4 analog channels are sampled synchronously with MMS4 magnetometer at up to 50 samples per second. The remaining 4 analog channels are sampled at 10 samples per second. Analog data is integrated into the magnetometer data stream.

Specifications:

Input: Coaxial - Larmour signal over DC Power Supply
Resolution: 0.0002 nT (Gamma) = 0.2 picoTesla
Sampling rates: 10, 20, 50 samples per second
Dynamic range: 15000 to 100000nT
Synchronization: GPS – PPS (Pulse Per Second)
Data Storage: Removable Compact Flash Memory

2.3 MAGNETOMETER SENSOR

The Magnetometer Sensor is a Geometrics G-822A, which employs an optically pumped cesium-vapour atomic magnetic resonance system that function as the frequency control element in an oscillator circuit.

Specifications:

Model: Geometrics G-822A
Operating Range: 20,000 – 100,000 nT
Sensitivity: Typically 0.002 nT P-P at a 10Hz sample rate
Heading Error: < 0.15 nT over entire 360°
Output: Larmour frequency, 3.498572 Hz/nT

2.4 FLUXGATE MAGNETOMETER

The Fluxgate Magnetometer is a Billingsley Ultra Miniature TFM 100G2. This unit is a low noise, high sensitivity unit, packaged into a compact housing. An analog DC output voltage is produced for each of the measured X, Y and Z orthogonal components of the current magnetic field.

Specifications:

Model: Billingsley TFM 100G2
Axial Alignment: Orthogonality better than $\pm 1^\circ$
Sensitivity: 100uV / nT
Noise: 20pT RMS / Hz @ 1Hz
Output: $\pm 100\text{uT} = \pm 10\text{V}$

2.5 SPECTROMETER

The Spectrometer is an Exploranium GR820 system. The unit comprises of 2 detector crystal packs which give a total volume for detection of 32 litres. The spectrometer employs automatic gain stabilisation control to eliminate the need to heat the detectors. Signal processing automatically perform digital gain control to the individual crystal spectra, ensuring the summed spectrum is stable.

Model:	Exploranium GR820
Sensitivity:	0 – 3.0 MeV
Maximum count rate:	100,000 counts/sec
Detector volume:	16.7 Litres (each)
Detector weight:	83.9 kgs (each)

2.6 TEMPERATURE AND HUMIDITY SENSORS

The Temperature and Humidity transmitter is a Vaisala HMP233. The unit provides both a digital RS232 output and Analogue voltage or current output directly proportional to the measured Temperature and Humidity. The unit is a commercial grade device housed in a rugged aluminium enclosure.

Specifications:

Model:	HMP233
Humidity Range:	0 – 100% RH
Humidity Accuracy:	±1 %RH (0...90 %RH) ±2 %RH (90...100 %RH)
Temperature Range:	-40 to +80°C
Temperature Accuracy:	± 0.1°C
Analog Output Accuracy:	±0.05 % full scale

2.7 BAROMETRIC PRESSURE SENSOR

The Barometric Pressure transmitter is a Vaisala PTB220. The unit provides both a digital RS232 output and Analogue voltage or current output directly proportional to the measured Barometric Pressure. The unit is a Class “A” commercial grade device housed in a rugged aluminium enclosure.

Specifications:

Model:	PTB220
Range:	500 – 1100 hPa
Resolution:	0.01 hPa
Accuracy at +20°C:	± 0.1 hPa

2.8 RADAR ALTIMETER

The Radar Altimeter is a Rockwell Collins ALT-50 two-antenna unit operating at a centre frequency of 4300MHz. The voltage output to the data system is directly proportional to the aircraft flying height with an output characteristic of 20mV/ft up to 500ft, then 10.4V + 3mV/ft above 500ft.

Specifications:

Model:	Collins ALT-50A Radio Altimeter System
Accuracy:	± 3ft - 0 to 150ft range ± 2% of indicated altitude – 150 to 500ft range ± 3.5% of indicated altitude – 500 to 200ft range
Measurement Rate:	Same rate as magnetometer, 10Hz minimum.

2.9 GPS/DGPS RECEIVER

The DGPS receiver is a CSI DGPS MAX, which is a 12-channel combined GPS/DGPS unit. The DGPS MAX is able to use differential corrections received through an internal WAAS demodulator, VLF beacon receiver, or the OmniSTAR DGPS Service.

Specifications:

Receiver:	CSI DGPS MAX
GPS Position update rate:	5Hz
GPS Input frequency:	L1
Antenna:	Fugro Wideband – Stinger Mounted
DGPS Update rate:	Typically every 6 seconds
DGPS Solution Used:	OmniSTAR VBS

2.10 GEM GSM-19W OVERHAUSER MAGNETOMETER

The Earth's diurnal activity was monitored using a GEM GSM-19W Overhauser Magnetometer and sampled at 1 Hz. The portable unit has a built-in GPS receiver.

Specifications:

Model:	GEM GSM-19W Overhauser
Type:	Overhauser Magnetometer
Resolution:	0.01 nT
Sensitivity:	0.02 nT
Absolute Accuracy:	+/- 0.1nT
Dynamic Range:	10,000 to 120,000 nT
Sampling Rate:	1 hour to 5 Hz
Data Storage:	Internal memory
Data Retrieval:	Up to 115,200bps serial transfer

2.10.1 Base Station Location

The base station at St Helens was located at

Longitude: 148° 15' 01.4" E

Latitude: 41° 21' 31.5" S



Sketch of the base station location at St Helens
(Image courtesy of Google Earth)

3 EQUIPMENT CALIBRATIONS AND DATA ACQUISITION CHECKS

3.1 DYNAMIC MAGNETOMETER COMPENSATION

Aircraft compensation tests were flown at high altitude on the 4 survey line headings and also at +/-15° to the line headings (to accommodate for cross wind flying conditions). The data for each heading consists of a series of aircraft manoeuvres with large angular excursions: specifically pitches, rolls and yaws. This is done to artificially create the worst possible attitudes and rates of attitudinal change likely to be encountered while on line and compensate for any magnetic noise created by the aircraft's motion within the earth's magnetic field. This data is processed to obtain the REAL TIME COMPENSATION terms of which the aircraft used the standard 17-term model. These terms include permanent, induced and eddy values. These coefficients may be applied in real time or during post processing. Note that this form of compensation will only remove those noise effects modelled in the manoeuvres test flight. External noise sources and random motions of the stinger with respect to the aircraft airframe generally establish the noise floor for this type of installation. The surveyor's goal is to achieve a 4th difference noise level on the order of 0.01nT RMS during normal surveying conditions. In general, this noise level was routinely achieved or bettered as a matter of course.

3.2 HEADING ERROR CHECK

Historically, heading error checks have been an essential part of the aeromagnetic data acquisition procedure but their importance now has diminished. GPX Airborne now corrects for these effects using the dynamic aircraft magnetic compensation system and specially developed software. In the past, repeatable heading errors of less than one nanotesla (1.0nT) were considered good. Dynamic compensation typically yields heading errors in the order of 0.1 to 0.3 nT, which are effectively eliminated by modern data levelling techniques.

3.3 SYSTEM PARALLAX TESTS

One of the processing parameters required to process digital data was the parallax or offset time, between the time the digital reading was taken by the instrument and the time the position fix for the fiducial of the reading was obtained. Each instrument - magnetometer, altimeter - may have a different parallax, so the parallax must be computed for each instrument.

The parallax correction derived is the correction to be applied to each survey line. A positive parallax indicates the instrument reading is ahead of the position of the fiducial. Each integer fiducial represents one second so the parallax can be expressed in either fiducial or seconds.

The correct fiducial is computed by:

$$\textit{Parallax corrected fid} = \textit{Fid for recorded reading} - \textit{Instrument parallax}$$

Results of parallax test.

Channel	Parallax applied
GPS Position	0.6
Magnetic data	1.6
Altimeter data	1.7
Radiometric data	0.0

3.4 ALTIMETER CALIBRATIONS

The height of the aircraft above ground is recorded by a radar altimeter as a voltage every 0.1 second. The voltage data is converted to height via a lookup table determined by calibration with the GPS altitude.

3.5 RADIOMETRIC PRE SURVEY CALIBRATIONS

The results of radiometric calibrations conducted by flying over the Yarra Yarra salt lake, and the Carnamah test range in Western Australia. The Pad tests were completed in August 2006 at the Jandakot Airport.

Data acquisition was by GPX Airborne, using a Cessna 210, VH-MNN. The total crystal volume was 33 litres.

The Calibration methods are as generally described by Grasty and Minty (1995).

A summary of the results is shown in Table 1 below.

VH-MNN	Date	Window	Value
Aircraft Background	9-August 2006	TC	81.67
		K	23.35
		U	0.59
		Th	0.67
Cosmic Background	9-August 2006	TC	0.811201
		K	0.044663
		U	0.038646
		Th	0.043791
Stripping	1-August 2006	Alpha	0.250
		Beta	0.400
		Gamma	0.810
		a	0.060
Height Attenuation	4-August 2006	TC	0.006928
		K	0.009043
		U	0.007186
		Th	0.006892

3.6 DAILY RADIOMETRIC CHECKS

A system stability test was performed at the start and end of each day. This was done using a thorium source placed a least 40cm from the centre of each

detector. The average deadtime and background corrected thorium window was calculated and checked to be within 3 percent from the average of all other calibrations.

Additionally a low-level test line was flown of at least 100 seconds in duration, this was used to establish that the soil moisture had not changed significantly and that the spectrometer system is functioning correctly.

3.7 DAILY TIME SYNCHRONIZATION

Before each days survey the magnetic base station is automatically synchronized with the GPS receiver time in the aircraft. Prior to the commencement of survey, the temporal drift of this base station was determined. The unit is automatically updated by the GPS so there is no time drift in the system.

3.8 SURVEY LINE NUMBERING SYSTEM

The first digit in any line number represents the area number, i.e. 100050 is area no. 1.

The next four numbers are the line number it self, i.e. 101030 is line number 103.

All Tie lines begin with the digit 7, i.e. 170020.

The sixth digits of any line number represent the attempt number, i.e. 100010 is the first attempt.

4 DATA VERIFICATION AND FINAL PROCESSING

4.1 IN FIELD DATA PROCESSING

All data verification and preliminary processing and map production was conducted at the field office using a Toshiba Notebook computer. ChrisDBF was the primary field quality control software.

At the conclusion of each days survey all magnetic, radiometric, altimeter, flight path and diurnal data was transferred via compact flash memory onto the office computer for preliminary data verification.

4.1.1 Altimeter Data

Radar Altimeter Data

The radar altimeter is verified to check that a reasonably constant height above the terrain specified in section 1.7 was flown; readings during the course of the survey did not exceed the specified tolerances. The radar altimeter data is used in the production of digital terrain maps.

GPS Height Data

The aircraft's height above mean sea level each second was determined by data from the post-processed GPS. The GPS height of the aircraft is verified to check for data masking and for equipment reliability. The GPS height data is used in the production of digital terrain maps.

Digital Terrain Data

After verification the radar altimeter height was subtracted from the GPS height to give the elevation of the terrain above mean sea level.

Gridding and Inspection

The digital terrain data was gridded and grid image enhancements were computed and displayed on screen. These were viewed also with the aid of crossline sun angles and inspected for inconsistencies and errors and appropriate corrections were made if required.

4.1.2 Flight Path Data

The flight path is plotted daily to ensure it was within survey specifications. Any data not within specification was re-flown. The aircraft GPS recorded the data in the WGS84 datum.

4.1.3 Magnetic Data

The raw un-edited magnetic data was checked to identify noise and spikes. Single reading spikes were manually edited and if the noise exceeded the contract specifications, the line was re-flown.

Magnetic Diurnal Data

Diurnal data recorded every 1 second from the primary base station was downloaded from the magnetometer's memory onto the field processing computer via compact flash. The diurnal data was then checked and corrected for spikes. Single reading spikes were manually edited and multiple erroneous readings flagged as invalid. If invalid diurnal data occurred whilst survey data was being acquired the affected section was re-flown. The diurnal data was also checked to see that the change in diurnal readings during the course of the survey did not exceed the specified tolerances. When this occurred the affected survey lines were re-flown. The diurnal data was merged with the aircraft data and used in the verification of the magnetic data.

Diurnal Correction

The synchronized digital diurnal data collected by the base station was first subtracted from the corresponding airborne magnetic readings to calculate a difference. The resultant difference was then subtracted from the base value to produce diurnally corrected magnetic data.

Parallax Correction

The aircraft system parallax is also checked prior to project commencement. A parallax error correction of 0.0 second was used for in field verification.

Gridding and Inspection

The magnetic data was gridded and grid image enhancements were computed and displayed on screen. These were also viewed with the aid of crossline sun angles and inspected for inconsistencies and errors and appropriate corrections were made if required.

4.1.4 Radiometric Data

Spectra Verification

The 256-channel radiometric data is viewed to confirm that the spectra peaks are correctly calibrated. The following peak locations are checked daily.

- Potassium 1460 keV
- Uranium 1760 keV
- Thorium 2614 keV

Parallax Correction

The aircraft system parallax is also checked prior to project commencement. A parallax error correction of 0.0 second was used for in field verification.

Gridding and Inspection

The radiometric data was gridded and grid image enhancements were computed and displayed on screen. These were also viewed with the aid of crossline sun angles and inspected for inconsistencies and errors and appropriate corrections were made if required.

4.1.5 Digital Archives

All raw aircraft, and diurnal base data were backed up on CD-ROM disk at the end of each day's survey. A further backup of all raw and edited data remained on the field-processing computer for the entire duration of the project. A copy of each days flying was transferred to the company's ftp site for further verification.

4.2 FINAL PROCESSING

All final data processing of the data was performed in the offices of GPX Airborne. Raw field data was transferred to the offices and processed to produce the final data. No field-processed data was used in the making of the final data. The final processing of the data follows the same quality control checks that are made in the field, however the final data has additional processes performed.

4.2.1 Final Processing of Altimeter Data

Radar Altimeter Data

The radar altimeter is verified to check that a reasonably constant height above the terrain specified in section 1.7 was flown; readings during the course of the survey did not exceed the specified tolerances. The radar altimeter data is used in the production of digital terrain maps.

GPS Height Data

The aircraft's height above mean sea level each second was determined by data from the post-processed GPS. The GPS height of the aircraft is verified to check for data masking and for equipment reliability. The GPS height data is used in the production of digital terrain maps.

Parallax Correction

A parallax error correction as described in section 3.3 was applied to the coordinate data.

Tie Line Levelling

A crossover program was used to compute the height difference between each tie line and the traverse line intersection. These differences were then applied to level the traverse lines to the tie lines.

Micro Levelling

Micro levelling was used to remove residual differences with a long wavelength along line and short wavelength across line. Application of the micro levelling process removed the streaks that were sometimes visible when using various grid enhancements.

Digital Terrain Data

After verification the radar altimeter height was subtracted from the GPS height and the Geoid – Ellipsoid separation correction applied to give the elevation of the terrain above mean sea level.

Gridding and Inspection

The digital terrain data was gridded and grid image enhancements were computed and displayed on screen. These were viewed also with the aid of crossline sun angles and inspected for inconsistencies and errors and appropriate corrections were made if required.

4.2.2 Final Processing of Magnetic Data

The raw un-edited magnetic data was checked to identify noise and spikes. Single reading spikes were manually edited.

Magnetic Diurnal Data

The diurnal data was then checked and corrected for spikes. Single reading spikes were manually edited and multiple erroneous readings flagged as invalid.

Diurnal Correction

The synchronized digital diurnal data collected by the base station was first subtracted from the corresponding airborne magnetic readings to calculate a difference. The resultant difference was then subtracted from the base value to produce diurnally corrected magnetic data.

Parallax Correction

A parallax error correction as described in section 3.3 was applied to the coordinate data.

IGRF correction

The magnetics data has been corrected for the regional gradient by subtracting the calculated IGRF (2005 model) computed continuously over the whole area. The calculation of these corrections used the GPS flying height. An IGRF base of 61320 nT was added.

Tie Line Levelling

A crossover program was used to compute the magnetic difference between each tie line and the traverse line intersection. These differences were then applied to level the traverse lines to the tie lines.

Micro Levelling

Micro levelling was used to remove residual differences with a long wavelength along line and short wavelength across line. Application of the micro levelling process removed the streaks that were sometimes visible when using various grid enhancements.

Gridding and Inspection

The magnetic data was gridded and grid image enhancements were computed and displayed on screen. These were also viewed with the aid of crossline sun angles and inspected for inconsistencies and errors and appropriate corrections were made if required.

4.2.3 Final Processing of Radiometric Data

IAEA Processing

The processing of the radiometric data is summarised below.

1. Apply the deadtime correction.
2. Energy recalibrate the 256 channel spectra and re-window the data.
3. Noise Adjusted Singular Value Decomposition (NASVD).
4. Remove spikes from the altimeter, temperature and pressure values.
5. Correct radiometric data to standard temperature and pressure.
6. Remove the aircraft background, apply the cosmic correction, remove radon, apply the stripping values and finally apply the height correction.

Deadtime correction

The GR-820 spectrometer requires a finite time to process each pulse from the detectors. The deadtime of the GR-820 is less than 5 microseconds per detector and this correction was applied.

Energy Recalibration

Spectra analysis was performed on each line of data and the position of the thorium and potassium peak positions determined and compared to their theoretical positions. The original spectra data was then mapped to the correct peak positions and new windowed data created for each of the standard IAEA windows as follows.

Window	Peak Energy (KeV)	Energy Window (KeV)		
Total Count		410	-	2810
Potassium	1460	1370	-	1570
Uranium	1760	1660	-	1860
Thorium	2615	2410	-	2810
Cosmic		3000		

256 Channel Noise Reduction

The two most common processing methods are:

1. Noise adjusted Singular Value Decomposition (NASVD). This was developed specifically for radiometric processing.
2. Maximum Noise Fraction (MNF). This was developed for removing noise from satellite images and subsequently used in radiometric processing.

Both methods use Principal Component Analysis (PCA) with the only difference being in the estimation of noise in the raw spectra and subsequent scaling before PCA.

We have implemented and extensively used both methods but prefer NASVD because it is simpler, requires one less pass of the data and less observations

for a good join when adjacent data sets are merged. However the 2 methods give almost the same result and both work well.

Careful analysis of the eigenvalues and eigenvectors of the PCA is required to ensure the process has worked correctly. We use the 7 most significant principal components to reduce the data with the remainder considered to be noise. If this is not the case, as seen from eigenvalue and eigenvector plots, then there is a problem with the data. So this is an excellent quality control tool as well as a noise reduction method. There are strong theoretical reasons for this approach and if less than 7 components are used some signal is likely to be removed. On large surveys we have found it is best to use 7 components globally rather than having to make difficult decisions for different segments of the survey as this provides a globally consistent result.

As final proof the method has worked correctly, residual line profiles and images of potassium, uranium and thorium must confirm that no signal is present. Also the ternary potassium, uranium and thorium image must be sharp. If signal has been removed this image will be blurred.

Standard Temperature and Pressure correction

The data was converted to effective altitude at standard temperature and pressure (STP) using the expression:

$$Alt(STP) = BA \times \left(\frac{P}{1013} \right) \times \frac{273}{(T + 273)}$$

Alt(STP) = Effective altitude at STP

BA = Barometric Altitude

P = Pressure

T = Temperature in °C

Cosmic Correction

The aircraft background radiation was removed by subtracting the aircraft background values from the Total Count, Potassium, Uranium and Thorium windows. The effect of cosmic radiation was removed from each window by multiplying the cosmic channel by the cosmic stripping factor for each window and subtracting the result from the window data.

Stripping

The radiometric spectra of potassium (K), uranium (U) and thorium (Th) series overlap. To evaluate of any one spectral window, which is designed to detect one radioelement, requires removal of the spectral overlap. This process of removal of the spectral overlap is known as stripping. The stripping procedure uses spectral stripping ratios determined experimentally using concrete calibration pads of known K, U and Th concentration.

Parallax Correction

A parallax error correction of 0.0 seconds was applied to the radiometric data.

Tie Line Levelling

A crossover program was used to compute the radiometric difference between each tie line and the traverse line intersection. These differences were then applied to level the traverse lines to the tie lines.

Micro Levelling

Micro levelling was used to remove residual differences with a long wavelength along line and short wavelength across line. Application of the micro levelling process removed the streaks that were sometimes visible when using various grid enhancements.

Gridding and Inspection


The radiometric data was gridded and grid image enhancements were computed and displayed on screen. These were also viewed with the aid of crossline sun angles and inspected for inconsistencies and errors and appropriate corrections were made if required.

4.2.4 Digital Archives


The final digital data was written out as a flat ASCII located data file. The format and channel description can be found in Appendix A. Grids of the final data were created in ERMapper format.

5 IMAGES


5.1 TOTAL MAGNETIC INTENSITY IMAGE

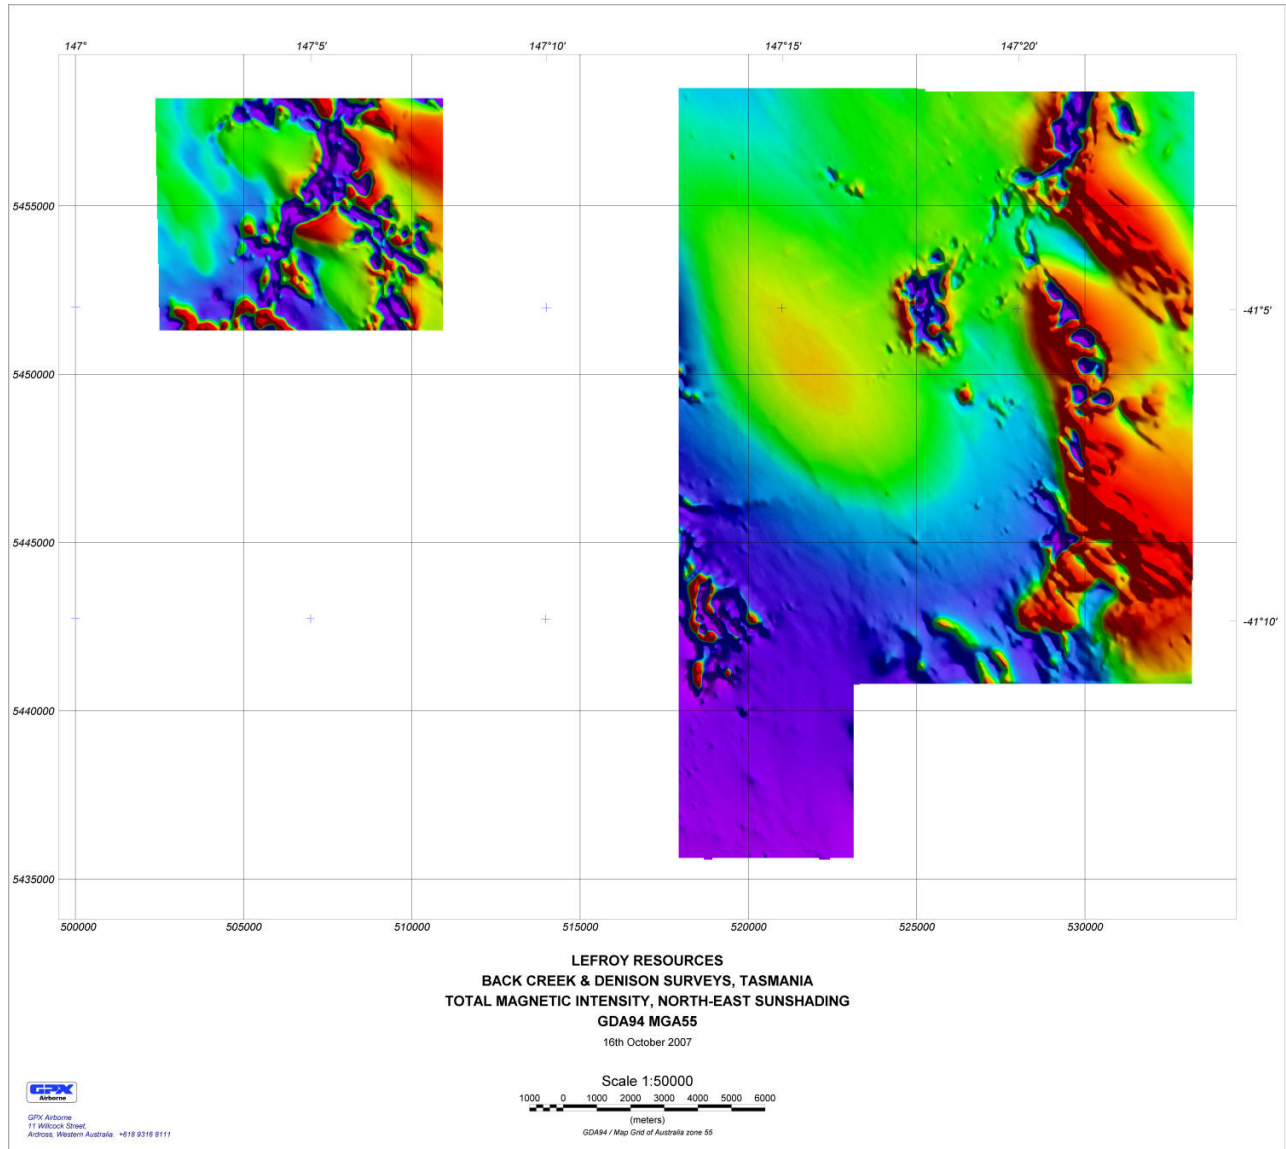

5.2 TOTAL MAGNETIC INTENSITY 1ST VERTICAL DERIVATIVE IMAGE

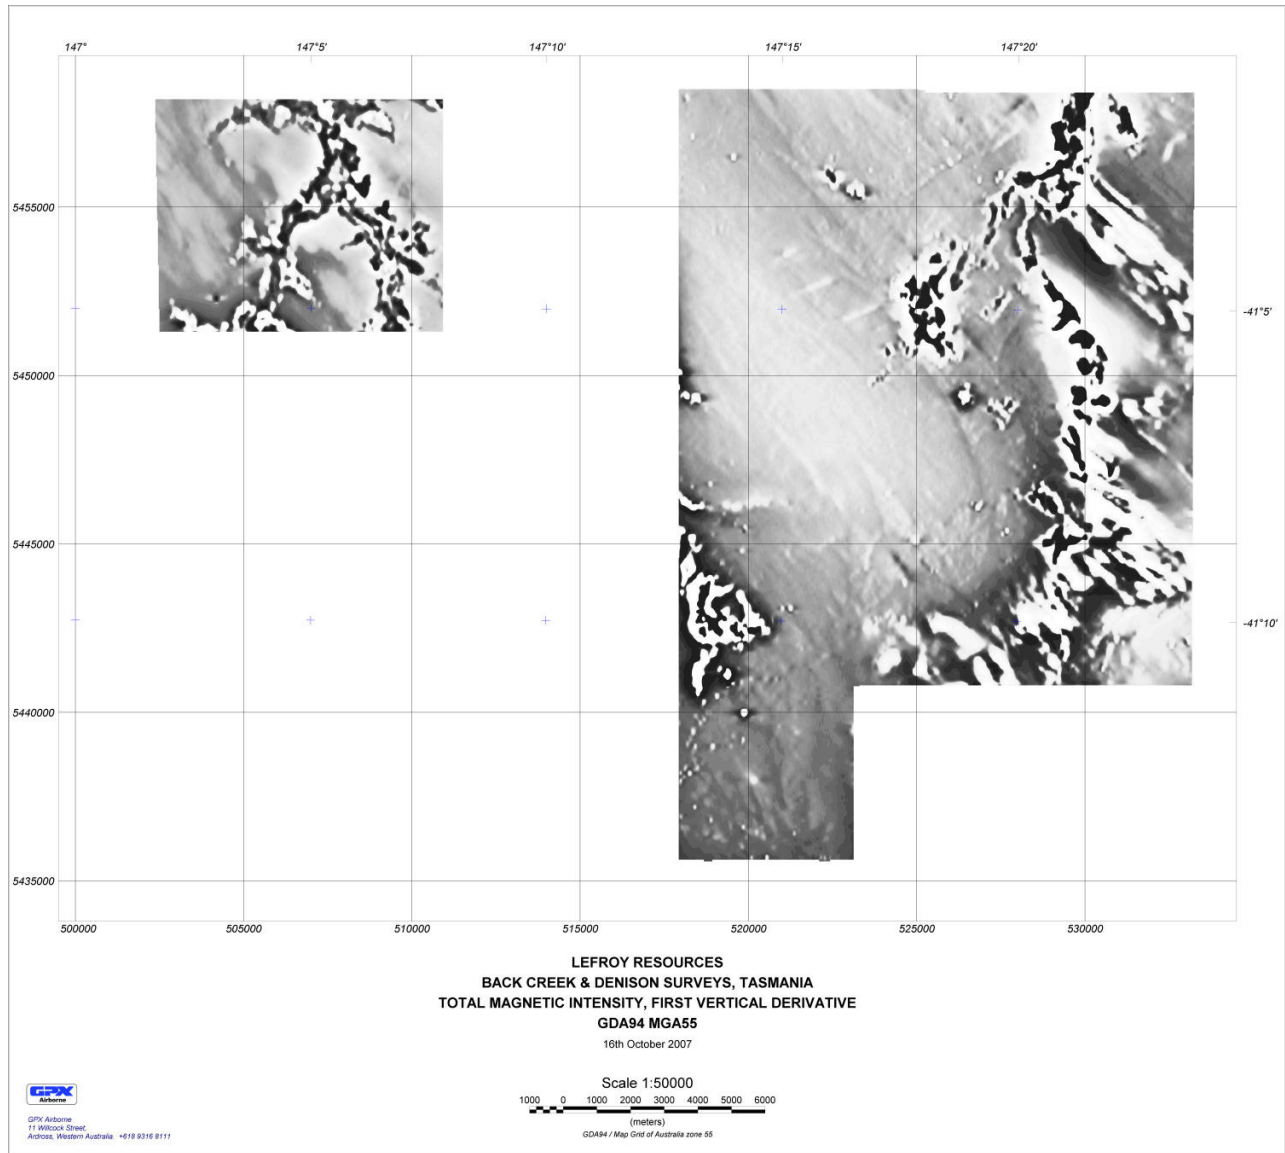

5.3 TOTAL COUNT IMAGE

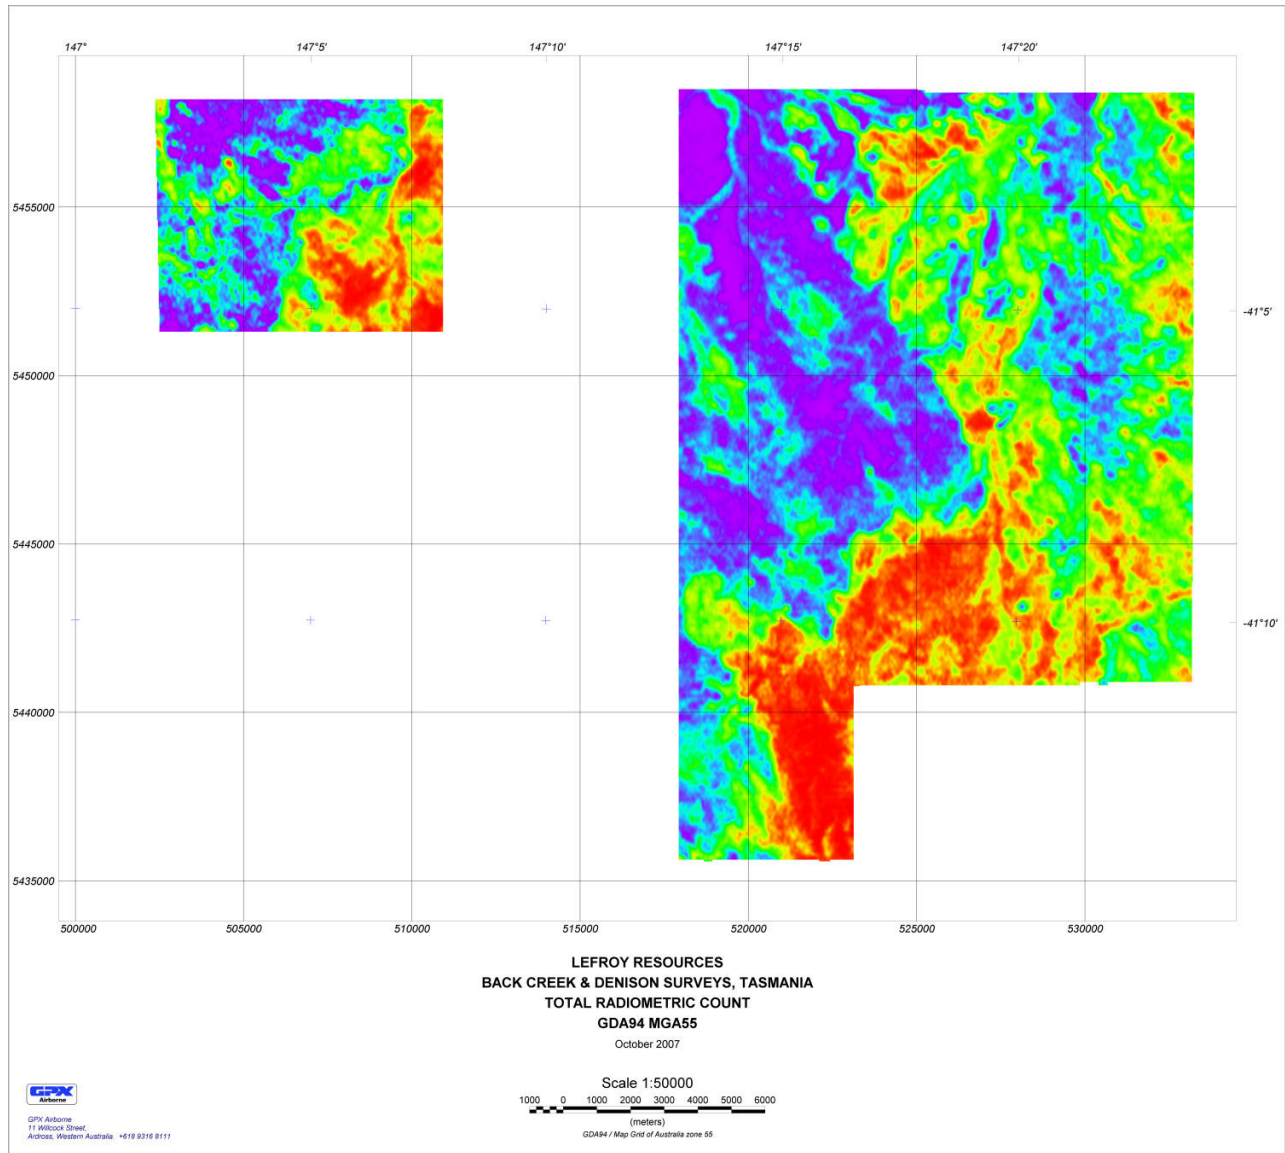

6 CONTRACTOR INFORMATION



GPX Airborne

**Locked Bag 3, Applecross,
Western Australia. 6153**

**Telephone: +618 9316 8111
Fax: +618 9316 8033**

Web: <http://www.gpxair.com.au/>

7 APPENDIX A: FINAL LOCATED DATA FORMAT

7.1 MAGNETIC DATA (BACK CREEK)

GENERAL

Project Lefroy
 Survey area Lefroy-West
 Located data type 0.1 Second Final Data

Surveyed by GPX AIRBORNE PTY LTD.
 Job number Lefroy
 Processed by GPX AIRBORNE PTY LTD.
 Creation date June 2007

SURVEY SPECIFICATIONS

Survey flown March - April 2007
 Traverse line spacing 100 metres
 Traverse line direction 000-180 degrees
 Tie line spacing 1000 metres
 Tie line direction 090-270 degrees

Survey height 90 metres

LOCATED DATA FORMAT

Variable	Units	Undefined	From	To	Format
Line number		9999999	1	8	I8
Easting (MGA55)	metres	9999999.99	9	19	F11.2
Northing (MGA55)	metres	9999999.99	20	30	F11.2
Fiducial		99999.99	31	39	F9.2
Flight number		999	40	43	I4
Direction (1=E, 2=N, 3=W, 4=S)		9	44	45	I2
Date (YYYYMMDD)		99999999	46	54	I9
Time (GPS)	seconds	99999.99	55	63	F9.2
Longitude (GDA94)	degrees	999.999999	64	74	F11.6
Latitude (GDA94)	degrees	999.999999	75	85	F11.6
Radar altimeter	metres	9999.9	86	92	F7.1
GPS altitude	metres	9999.9	93	99	F7.1
Raw magnetics	nT	99999.999	100	109	F10.3
Post compensated magnetics	nT	99999.999	110	119	F10.3
Diurnal	nT	99999.999	120	129	F10.3
Final magnetics	nT	99999.999	130	139	F10.3
Pressure	millibars	9999.9	140	146	F7.1
Temperature	degrees C	99.9	147	151	F5.1
Raw total count	cps	999999	152	158	F7.0
Raw potassium	cps	9999	159	163	F5.0
Raw uranium	cps	9999	164	168	F5.0
Raw thorium	cps	9999	169	173	F5.0
Raw cosmic	cps	99999.9	174	178	F5.0
Final total count	cps	99999.99	179	187	F9.2
Final potassium	cps	99999.99	188	196	F9.2
Final uranium	cps	99999.99	197	205	F9.2
Final thorium	cps	99999.99	206	214	F9.2
Final DTM	metres	99999.9	215	222	F8.1

DATA PROCESSING

COORDINATE DATA

All lines are scissored to the following rules:

- 1) A 'smooth' edge outside the area boundary.
- 2) Maximum line overlap of 0 fiducials within the area boundary.

The local projection is a UTM projection based on the GDA94 spheroid with a central meridian of 147 East degrees. System parallax of 0.6 fiducial has been removed.

MAGNETIC DATA

The magnetic data has been corrected for regional gradient by subtraction of IGRF model 2005 computed continuously over the whole area based on the GPS height.

Diurnal magnetic variations have been removed.

System parallax of 1.6 fiducial has been removed.

Tie-line levelling has been applied.

Microlevelling has been applied.

A base value of 61320 nT has been added to the data.

RADIOMETRIC DATA

Raw channel data provided has been energy calibrated
NASVD has been applied to channel data prior to windowing
System parallax of 0.0 fiducial has been removed.
Height attenuated to 90m AGL
Airborne radon has been removed

AIRCRAFT BACKGROUND		UNITS	
Total Count	81.67	cps	
Potassium	23.35	cps	
Uranium	0.59	cps	
Thorium	0.67	cps	
COSMIC STRIPPING RATIOS			
Total Count	0.811201		
Potassium	0.044663		
Uranium	0.038646		
Thorium	0.043791		
COMPTON STRIPPING RATIOS			
alpha	0.250		
beta	0.400		
gamma	0.810		
a	0.060		
HEIGHT ATTENUATION COEFFICIENT			
Total Count	0.006928	per metre	
Potassium	0.009043	per metre	
Uranium	0.007186	per metre	
Thorium	0.006892	per metre	
WINDOW ENERGY LEVELS			
	Low Energy	High Energy	
Total Count	410.0	2810.0	keV
Potassium	1370.0	1570.0	keV
Uranium	1660.0	1860.0	keV
Thorium	2410.0	2810.0	keV

DIGITAL TERRAIN MODEL DATA

DIGITAL TERRAIN MODEL CALCULATION

The radar altimeter data was subtracted from the GPS heights to provide a digital elevation model which is height above the WGS84 spheroid. Using

interpolation on the 120 second DMA Geoid model, a correction was computed and subtracted from the WGS84 data to convert to height above the geoid.

DATA RELIABILITY

This Digital Terrain Model (DTM) has been computed from data generated during the course of an airborne geophysical survey flown at a nominal spacing of 100m and data has been interpolated between such lines. Every effort has been made to make this model a useful general reference. No guarantee can be made that this model is a true representation of height above sea level as it can contain radar altimeter responses from buildings and in some instances dense timber. Users of the product should be aware of the topographic limitations mapped herewithin. Do not use this DTM for navigation purposes.

7.2 RADIOMETRIC DATA (BACK CREEK)

GENERAL

Project Lefroy
 Survey area Lefroy-West
 Located data type 1 Second Radiometric Data

 Surveyed by GPX AIRBORNE PTY LTD.
 Job number Lefroy
 Processed by GPX AIRBORNE PTY LTD.
 Creation date June 2007

SURVEY SPECIFICATIONS

Survey flown March - April 2007
 Traverse line spacing 100 metres
 Traverse line direction 000-180 degrees
 Tie line spacing 1000 metres
 Tie line direction 090-270 degrees

Survey height 90 metres

LOCATED DATA FORMAT

Variable	Units	Undefined	From	To	Format
Line number		9999999	1	8	I8
Easting (MGA55)	metres	9999999.99	9	19	F11.2
Northing (MGA55)	metres	9999999.99	20	30	F11.2
Fiducial		99999.99	31	39	F9.2
Flight number		999	40	43	I4
Direction (1=E, 2=N, 3=W, 4=S)		9	44	45	I2
Date (YYYYMMDD)		99999999	46	54	I9
Time (GPS)	seconds	99999.99	55	63	F9.2
Longitude (GDA94)	degrees	999.999999	64	74	F11.6
Latitude (GDA94)	degrees	999.999999	75	85	F11.6
Radar altimeter	metres	9999.9	86	92	F7.1
Pressure	millibars	9999.9	93	99	F7.1
Temperature	degrees C	99.9	100	104	F5.1
Raw total count	cps	999999	105	111	F7.0
Raw potassium	cps	9999	112	116	F5.0
Raw uranium	cps	9999	117	121	F5.0
Raw thorium	cps	9999	122	126	F5.0
Raw cosmic	cps	99999.9	127	131	F5.0
Final total count	cps	99999.99	132	140	F9.2
Final potassium	cps	99999.99	141	149	F9.2

Job 2290, Lefroy Resources, Airborne Geophysical Survey, Back Creek and Denison (Tasmania)

Final uranium	cps	99999.99	150	158	F9.2
Final thorium	cps	99999.99	159	167	F9.2
Raw 256 channel data	cps	999	168	1191	I4
Energy calibrated 256 channel	cps	9999.9	1192	2983	F7.1

DATA PROCESSING

COORDINATE DATA

All lines are scissored to the following rules:

- 1) A 'smooth' edge outside the area boundary.
- 2) Maximum line overlap of 0 fiducials within the area boundary.

The local projection is a UTM projection based on the GDA94 spheroid with a central meridian of 147 East degrees. System parallax of 0.6 fiducial has been removed.

RADIOMETRIC DATA

NASVD has been applied to channel data prior to windowing
System parallax of 0.0 fiducial has been removed.
Height attenuated to 90m AGL
Airborne radon has been removed

AIRCRAFT BACKGROUND		UNITS	
Total Count	81.67	cps	
Potassium	23.35	cps	
Uranium	0.59	cps	
Thorium	0.67	cps	
COSMIC STRIPPING RATIOS			
Total Count	0.811201		
Potassium	0.044663		
Uranium	0.038646		
Thorium	0.043791		
COMPTON STRIPPING RATIOS			
alpha	0.250		
beta	0.400		
gamma	0.810		
a	0.060		
HEIGHT ATTENUATION COEFFICIENT			
Total Count	0.006928	per metre	
Potassium	0.009043	per metre	
Uranium	0.007186	per metre	
Thorium	0.006892	per metre	
WINDOW ENERGY LEVELS			
	Low Energy	High Energy	
Total Count	410.0	2810.0	keV
Potassium	1370.0	1570.0	keV
Uranium	1660.0	1860.0	keV
Thorium	2410.0	2810.0	keV

7.3 MAGNETIC DATA (DENISON)

GENERAL

Project	Lefroy
Survey area	Lefroy-East
Located data type	0.1 Second Final Data
Surveyed by	GPX AIRBORNE PTY LTD.
Job number	Lefroy
Processed by	GPX AIRBORNE PTY LTD.

Job 2290, Lefroy Resources, Airborne Geophysical Survey, Back Creek and Denison (Tasmania)

Creation date June 2007

SURVEY SPECIFICATIONS

Survey flown March - April 2007
Traverse line spacing 100 metres
Traverse line direction 000-180 degrees
Tie line spacing 1000 metres
Tie line direction 090-270 degrees

Survey height 90 metres

LOCATED DATA FORMAT

Variable	Units	Undefined	From	To	Format
Line number		9999999	1	8	I8
Easting (MGA55)	metres	9999999.99	9	19	F11.2
Northing (MGA55)	metres	9999999.99	20	30	F11.2
Fiducial		99999.99	31	39	F9.2
Flight number		999	40	43	I4
Direction (1=E, 2=N, 3=W, 4=S)		9	44	45	I2
Date (YYYYMMDD)		99999999	46	54	I9
Time (GPS)	seconds	99999.99	55	63	F9.2
Longitude (GDA94)	degrees	999.999999	64	74	F11.6
Latitude (GDA94)	degrees	999.999999	75	85	F11.6
Radar altimeter	metres	9999.9	86	92	F7.1
GPS altitude	metres	9999.9	93	99	F7.1
Raw magnetics	nT	99999.999	100	109	F10.3
Post compensated magnetics	nT	99999.999	110	119	F10.3
Diurnal	nT	99999.999	120	129	F10.3
Final magnetics	nT	99999.999	130	139	F10.3
Pressure	millibars	9999.9	140	146	F7.1
Temperature	degrees C	99.9	147	151	F5.1
Raw total count	cps	999999	152	158	F7.0
Raw potassium	cps	9999	159	163	F5.0
Raw uranium	cps	9999	164	168	F5.0
Raw thorium	cps	9999	169	173	F5.0
Raw cosmic	cps	99999.9	174	178	F5.0
Final total count	cps	99999.99	179	187	F9.2
Final potassium	cps	99999.99	188	196	F9.2
Final uranium	cps	99999.99	197	205	F9.2
Final thorium	cps	99999.99	206	214	F9.2
Final DTM	metres	99999.9	215	222	F8.1

DATA PROCESSING

COORDINATE DATA

All lines are scissored to the following rules:

- 1) A 'smooth' edge outside the area boundary.
- 2) Maximum line overlap of 0 fiducials within the area boundary.

The local projection is a UTM projection based on the GDA94 spheroid with a central meridian of 147 East degrees. System parallax of 0.6 fiducial has been removed.

MAGNETIC DATA

The magnetic data has been corrected for regional gradient by subtraction of IGRF model 2005 computed continuously over the whole area based on the GPS height.

Diurnal magnetic variations have been removed.
System parallax of 1.6 fiducial has been removed.
Tie-line levelling has been applied.
Microlevelling has been applied.
A base value of 61320 nT has been added to the data.

RADIOMETRIC DATA

Raw channel data provided has been energy calibrated
NASVD has been applied to channel data prior to windowing
System parallax of 0.0 fiducial has been removed.
Height attenuated to 90m AGL
Airborne radon has been removed

AIRCRAFT BACKGROUND		UNITS	
Total Count	81.67	cps	
Potassium	23.35	cps	
Uranium	0.59	cps	
Thorium	0.67	cps	
COSMIC STRIPPING RATIOS			
Total Count	0.811201		
Potassium	0.044663		
Uranium	0.038646		
Thorium	0.043791		
COMPTON STRIPPING RATIOS			
alpha	0.250		
beta	0.400		
gamma	0.810		
a	0.060		
HEIGHT ATTENUATION COEFFICIENT			
Total Count	0.006928	per metre	
Potassium	0.009043	per metre	
Uranium	0.007186	per metre	
Thorium	0.006892	per metre	
WINDOW ENERGY LEVELS			
	Low Energy	High Energy	
Total Count	410.0	2810.0	keV
Potassium	1370.0	1570.0	keV
Uranium	1660.0	1860.0	keV
Thorium	2410.0	2810.0	keV

DIGITAL TERRAIN MODEL DATA

DIGITAL TERRAIN MODEL CALCULATION

The radar altimeter data was subtracted from the GPS heights to provide a digital elevation model which is height above the WGS84 spheroid. Using interpolation on the 120 second DMA Geoid model, a correction was computed and subtracted from the WGS84 data to convert to height above the geoid.

DATA RELIABILITY

This Digital Terrain Model (DTM) has been computed from data generated during the course of an airborne geophysical survey flown at a nominal spacing of 100m and data has been interpolated between such lines. Every effort has been made to make this model a useful general reference. No guarantee can be made that this model is a true representation of height above sea level as it can contain radar altimeter responses from buildings and in some instances dense timber. Users of the product should be aware of the topographic limitations mapped herewithin. Do not use this DTM for navigation purposes.

7.4 RADIOMETRIC DATA (DENISON)

GENERAL

Project Lefroy
 Survey area Lefroy-East
 Located data type 1 Second Radiometric Data

 Surveyed by GPX AIRBORNE PTY LTD.
 Job number Lefroy
 Processed by GPX AIRBORNE PTY LTD.
 Creation date June 2007

SURVEY SPECIFICATIONS

Survey flown March - April 2007
 Traverse line spacing 100 metres
 Traverse line direction 000-180 degrees
 Tie line spacing 1000 metres
 Tie line direction 090-270 degrees

 Survey height 90 metres

LOCATED DATA FORMAT

Variable	Units	Undefined	From	To	Format
Line number		9999999	1	8	I8
Easting (MGA55)	metres	9999999.99	9	19	F11.2
Northing (MGA55)	metres	9999999.99	20	30	F11.2
Fiducial		99999.99	31	39	F9.2
Flight number		999	40	43	I4
Direction (1=E, 2=N, 3=W, 4=S)		9	44	45	I2
Date (YYYYMMDD)		99999999	46	54	I9
Time (GPS)	seconds	99999.99	55	63	F9.2
Longitude (GDA94)	degrees	999.999999	64	74	F11.6
Latitude (GDA94)	degrees	999.999999	75	85	F11.6
Radar altimeter	metres	9999.9	86	92	F7.1
Pressure	millibars	9999.9	93	99	F7.1
Temperature	degrees C	99.9	100	104	F5.1
Raw total count	cps	999999	105	111	F7.0
Raw potassium	cps	9999	112	116	F5.0
Raw uranium	cps	9999	117	121	F5.0
Raw thorium	cps	9999	122	126	F5.0
Raw cosmic	cps	99999.9	127	131	F5.0
Final total count	cps	99999.99	132	140	F9.2
Final potassium	cps	99999.99	141	149	F9.2
Final uranium	cps	99999.99	150	158	F9.2
Final thorium	cps	99999.99	159	167	F9.2
Raw 256 channel data	cps	999	168	1191	I4
Energy calibrated 256 channel	cps	9999.9	1192	2983	F7.1

DATA PROCESSING

COORDINATE DATA

All lines are scissored to the following rules:

- 1) A 'smooth' edge outside the area boundary.
- 2) Maximum line overlap of 0 fiducials within the area boundary.

The local projection is a UTM projection based on the

GDA94 spheroid with a central meridian of 147 East degrees.
 System parallax of 0.6 fiducial has been removed.

RADIOMETRIC DATA

NASVD has been applied to channel data prior to windowing
 System parallax of 0.0 fiducial has been removed.
 Height attenuated to 90m AGL
 Airborne radon has been removed

AIRCRAFT BACKGROUND		UNITS	
Total Count	81.67		cps
Potassium	23.35		cps
Uranium	0.59		cps
Thorium	0.67		cps
COSMIC STRIPPING RATIOS			
Total Count	0.811201		
Potassium	0.044663		
Uranium	0.038646		
Thorium	0.043791		
COMPTON STRIPPING RATIOS			
alpha	0.250		
beta	0.400		
gamma	0.810		
a	0.060		
HEIGHT ATTENUATION COEFFICIENT			
Total Count	0.006928		per metre
Potassium	0.009043		per metre
Uranium	0.007186		per metre
Thorium	0.006892		per metre
WINDOW ENERGY LEVELS			
	Low Energy	High Energy	
Total Count	410.0	2810.0	keV
Potassium	1370.0	1570.0	keV
Uranium	1660.0	1860.0	keV
Thorium	2410.0	2810.0	keV