


1695 A

754

B8

5 cm

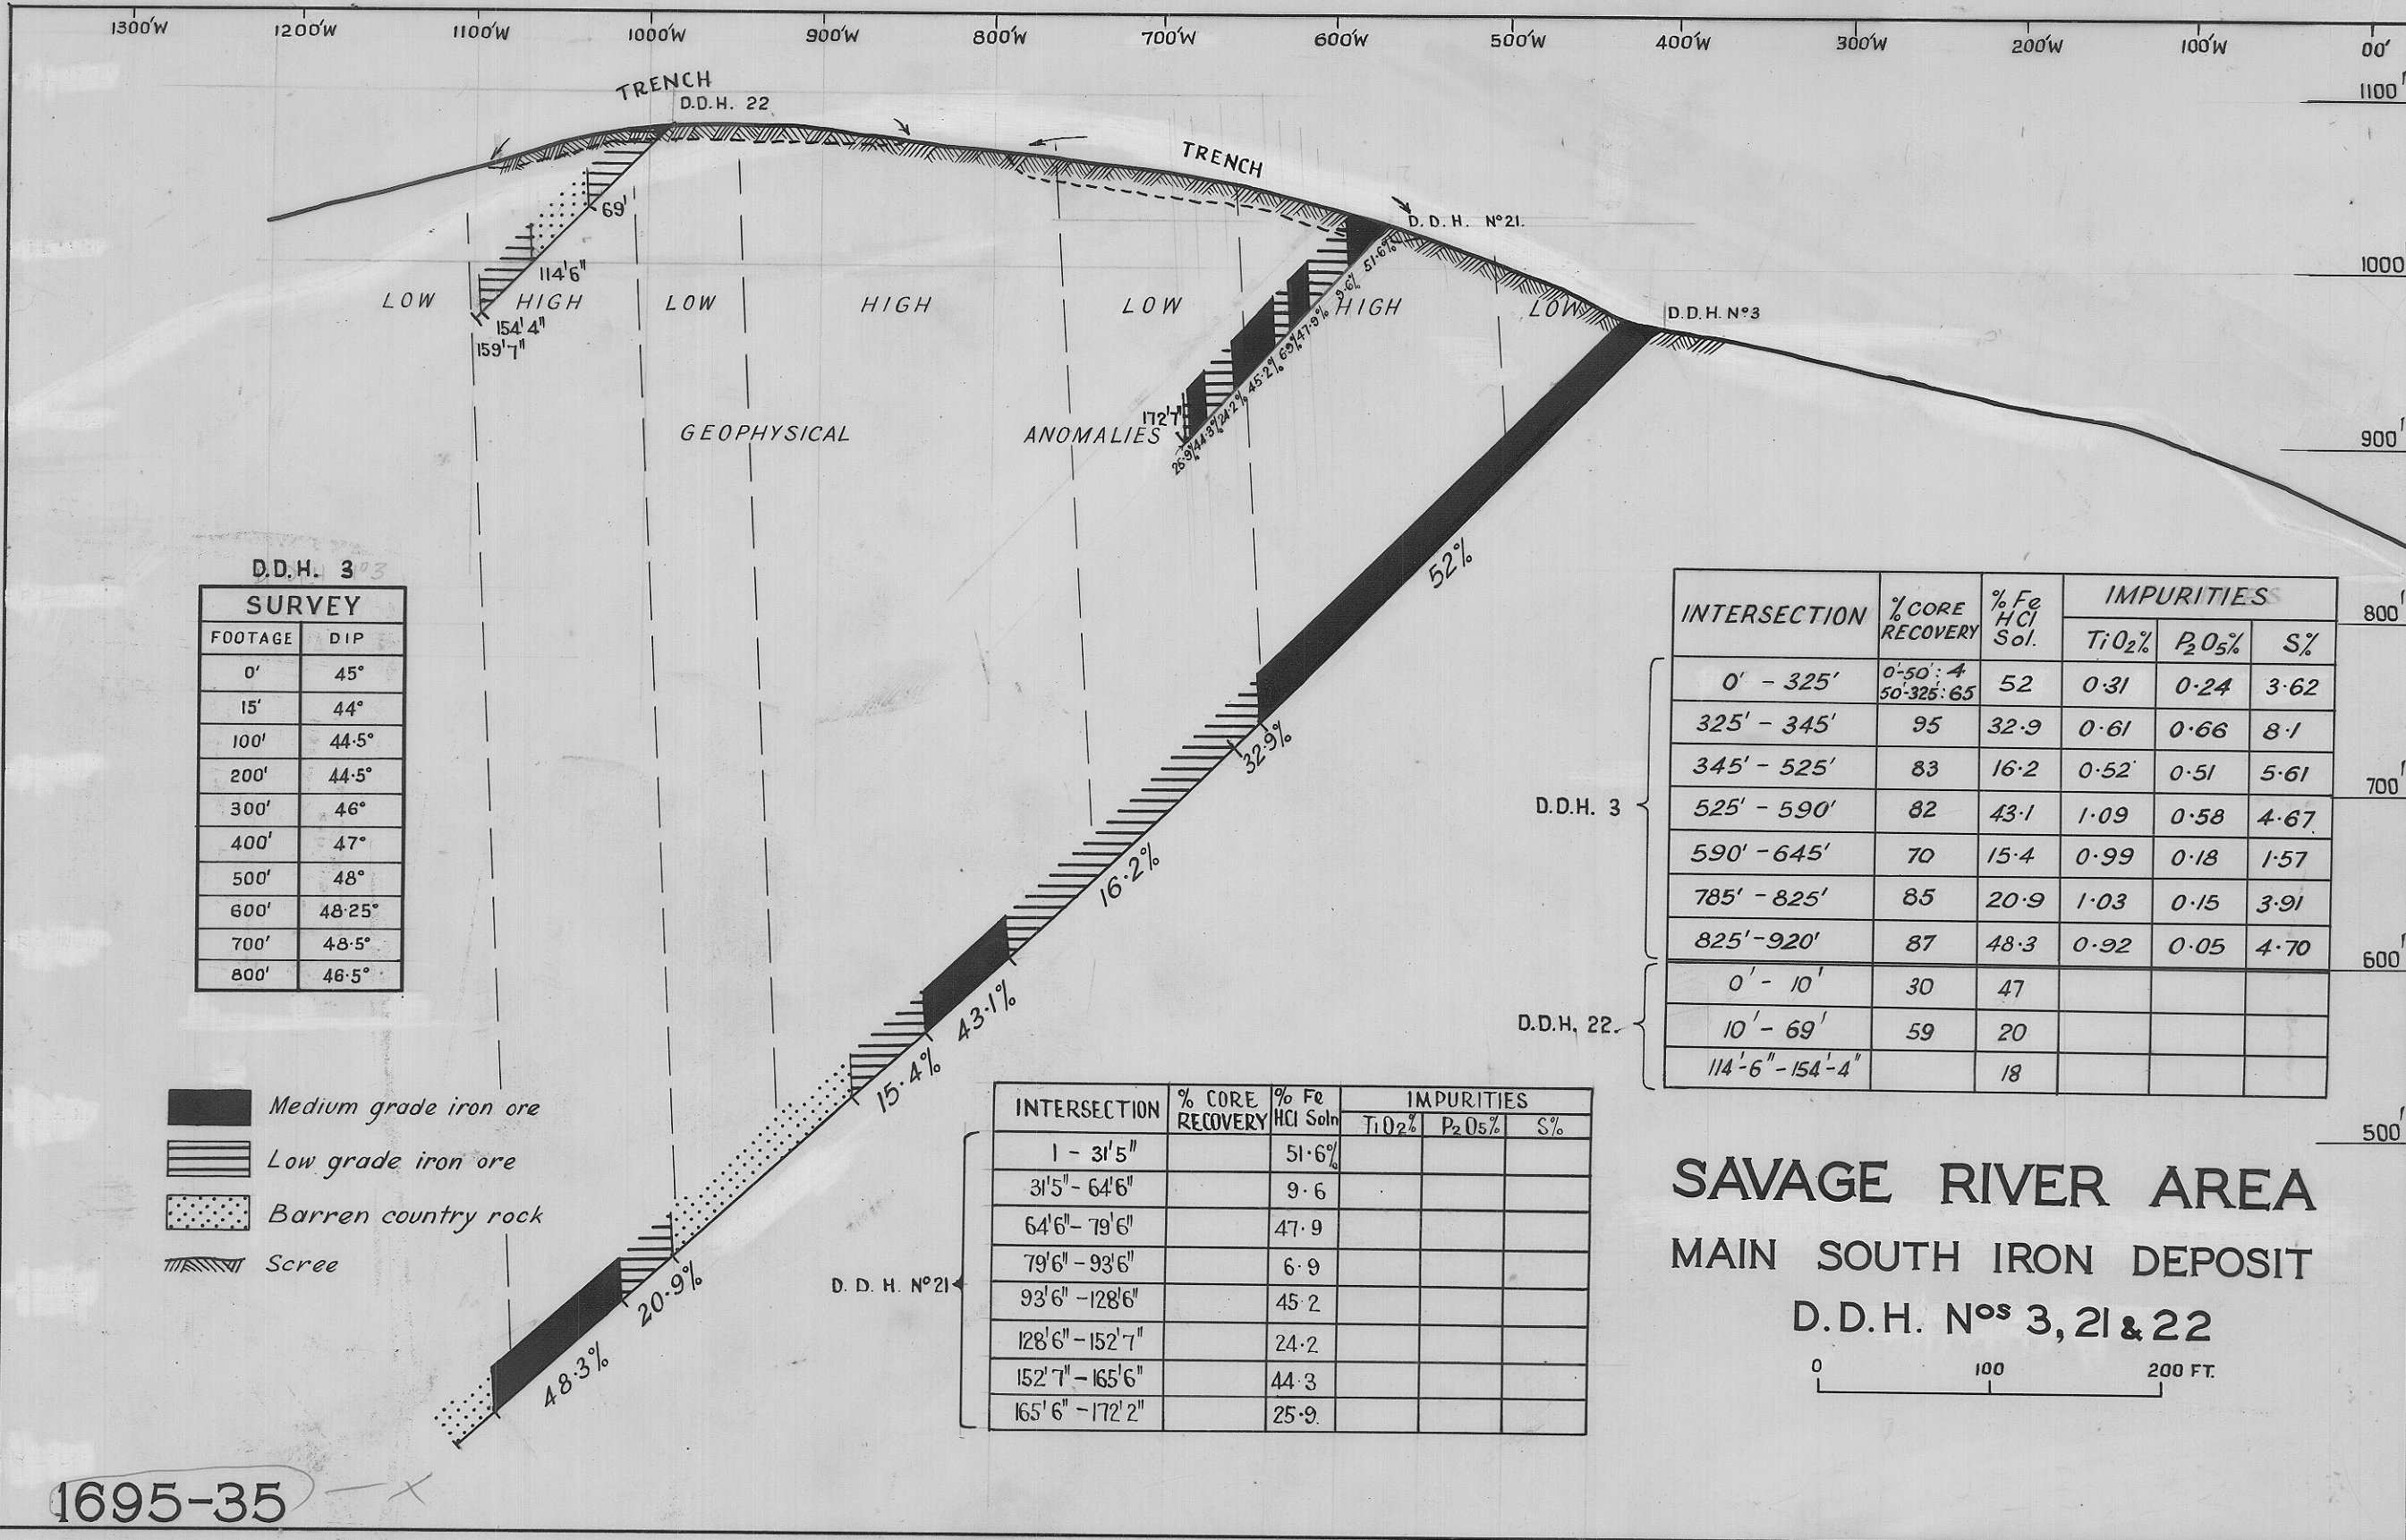

D.D.H. 3

SURVEY	
FOOTAGE	DIP
0'	45°
15'	44°
100'	44.5°
200'	44.5°
300'	46°
400'	47°
500'	48°
600'	48.25°
700'	48.5°
800'	46.5°

INTERSECTION	% CORE RECOVERY	% Fe HCl Sol.	IMPURITIES		
			TiO <sub>2</sub> %	P <sub>2</sub> O <sub>5</sub> %	S%
0' - 325'	0-50: 4 50-325: 65	52	0.31	0.24	3.62
325' - 345'	95	32.9	0.61	0.66	8.1
345' - 525'	83	16.2	0.52	0.51	5.61
525' - 590'	82	43.1	1.09	0.58	4.67
590' - 645'	70	15.4	0.99	0.18	1.57
785' - 825'	85	20.9	1.03	0.15	3.91
825' - 920'	87	48.3	0.92	0.05	4.70
0' - 10'	30	47			
10' - 69'	59	20			
114'-6" - 154'-4"		18			

INTERSECTION	% CORE RECOVERY	% Fe HCl Soln	IMPURITIES		
			TiO <sub>2</sub> %	P <sub>2</sub> O <sub>5</sub> %	S%
1 - 31'5"		51.6%			
31'5" - 64'6"		9.6			
64'6" - 79'6"		47.9			
79'6" - 93'6"		6.9			
93'6" - 128'6"		45.2			
128'6" - 152'7"		24.2			
152'7" - 165'6"		44.3			
165'6" - 172'2"		25.9			

**SAVAGE RIVER AREA  
MAIN SOUTH IRON DEPOSIT  
D.D.H. Nos 3, 21 & 22**

0 100 200 FT.

1695-35