




1768

801




5 cm

MINES DRAWING OFFICE
FILE COPY
PLEASE RETURN

1768-37

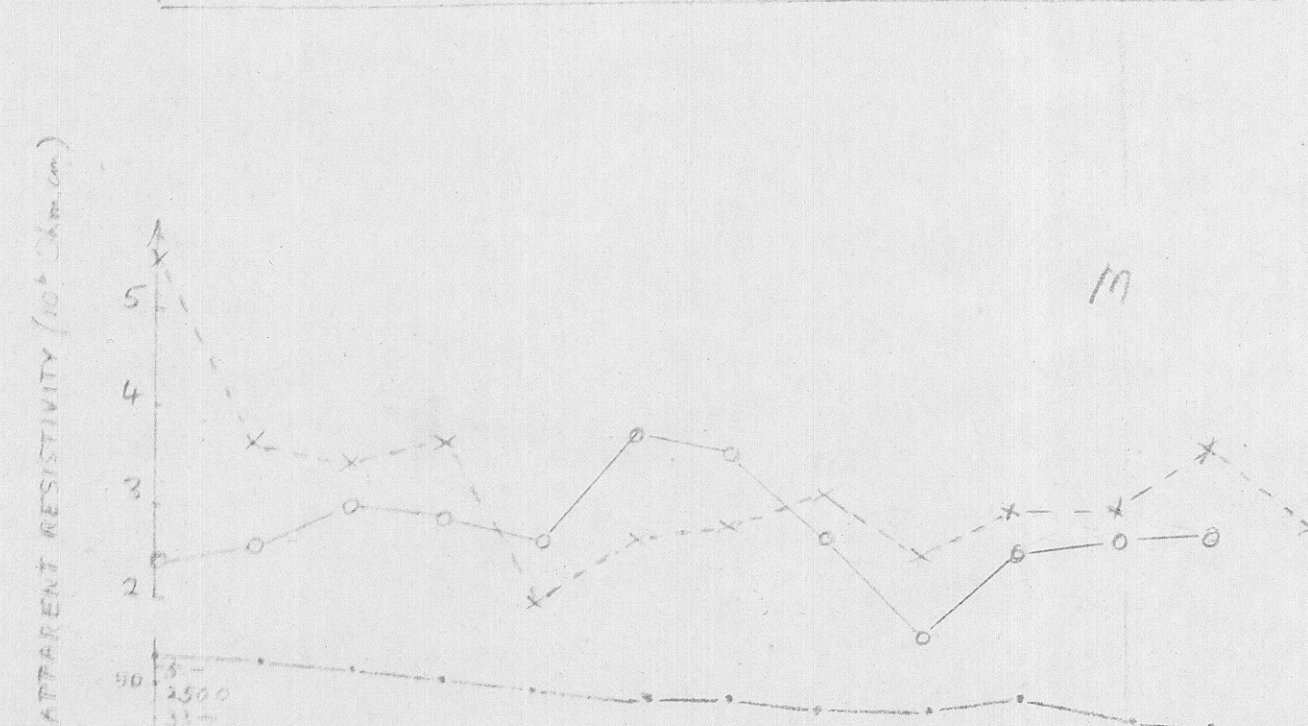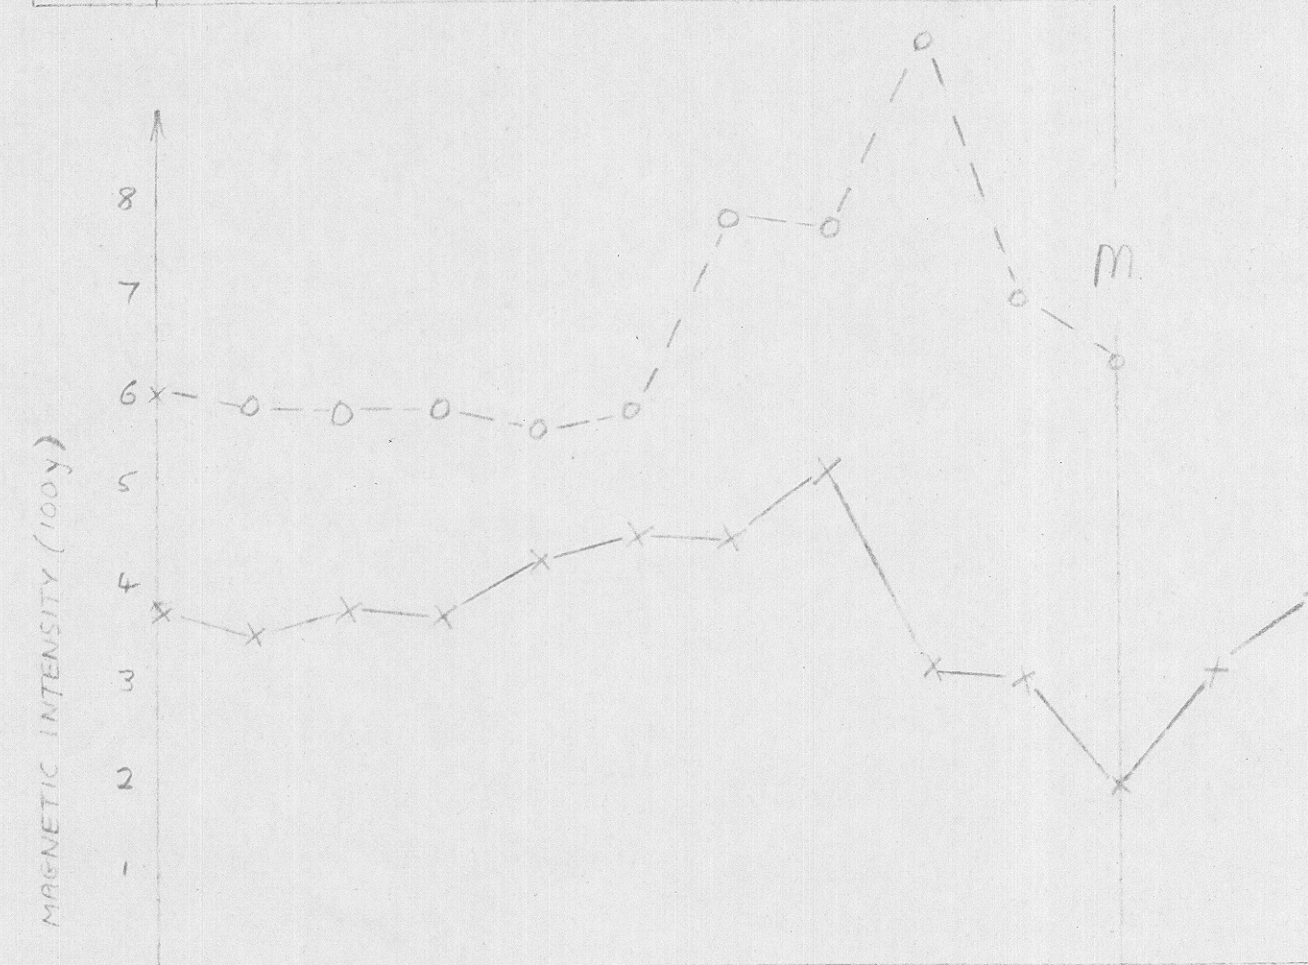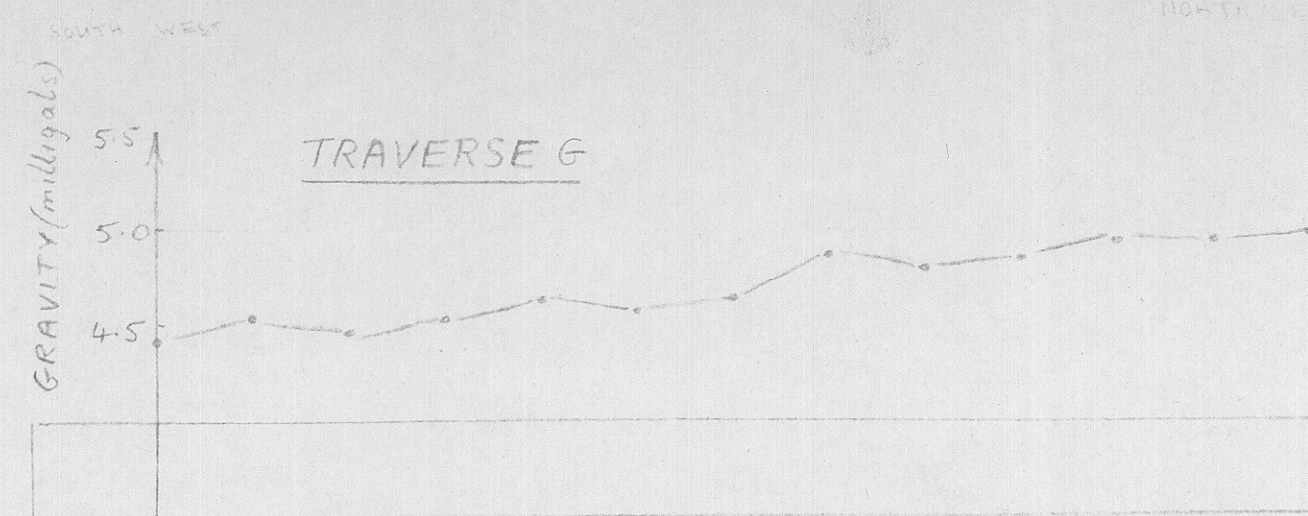

STATION	500	450	400	350	300	250	200	150	100	50	0	50	100
ELEVATION	68.2	60.3	56.1	51.2	46.0	40.8	38.0	35.4	33.1	30.9	28.1	26.0	23.2
DEPTH	147	143	148	142		128	124	120	124	116	110		

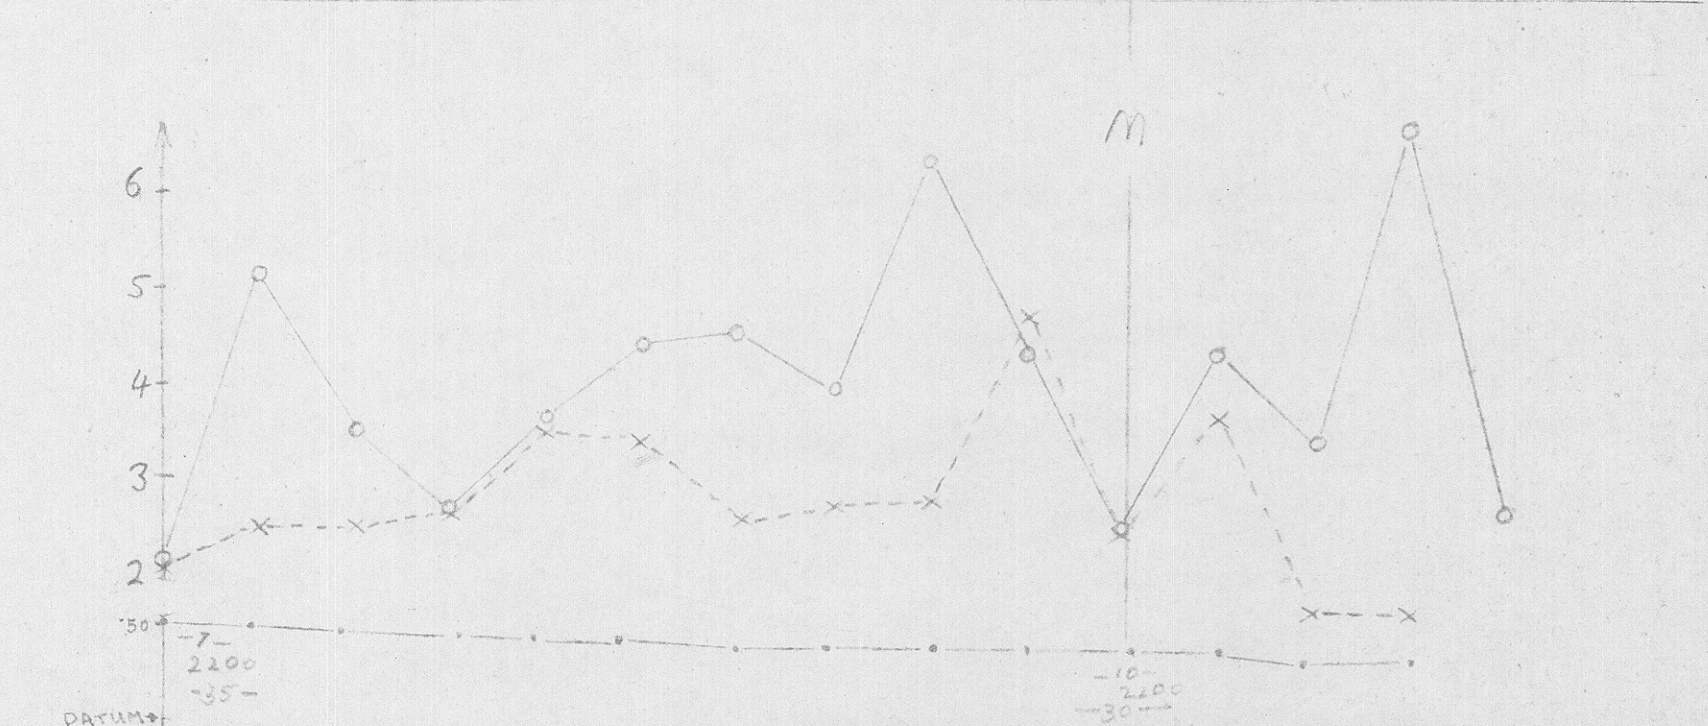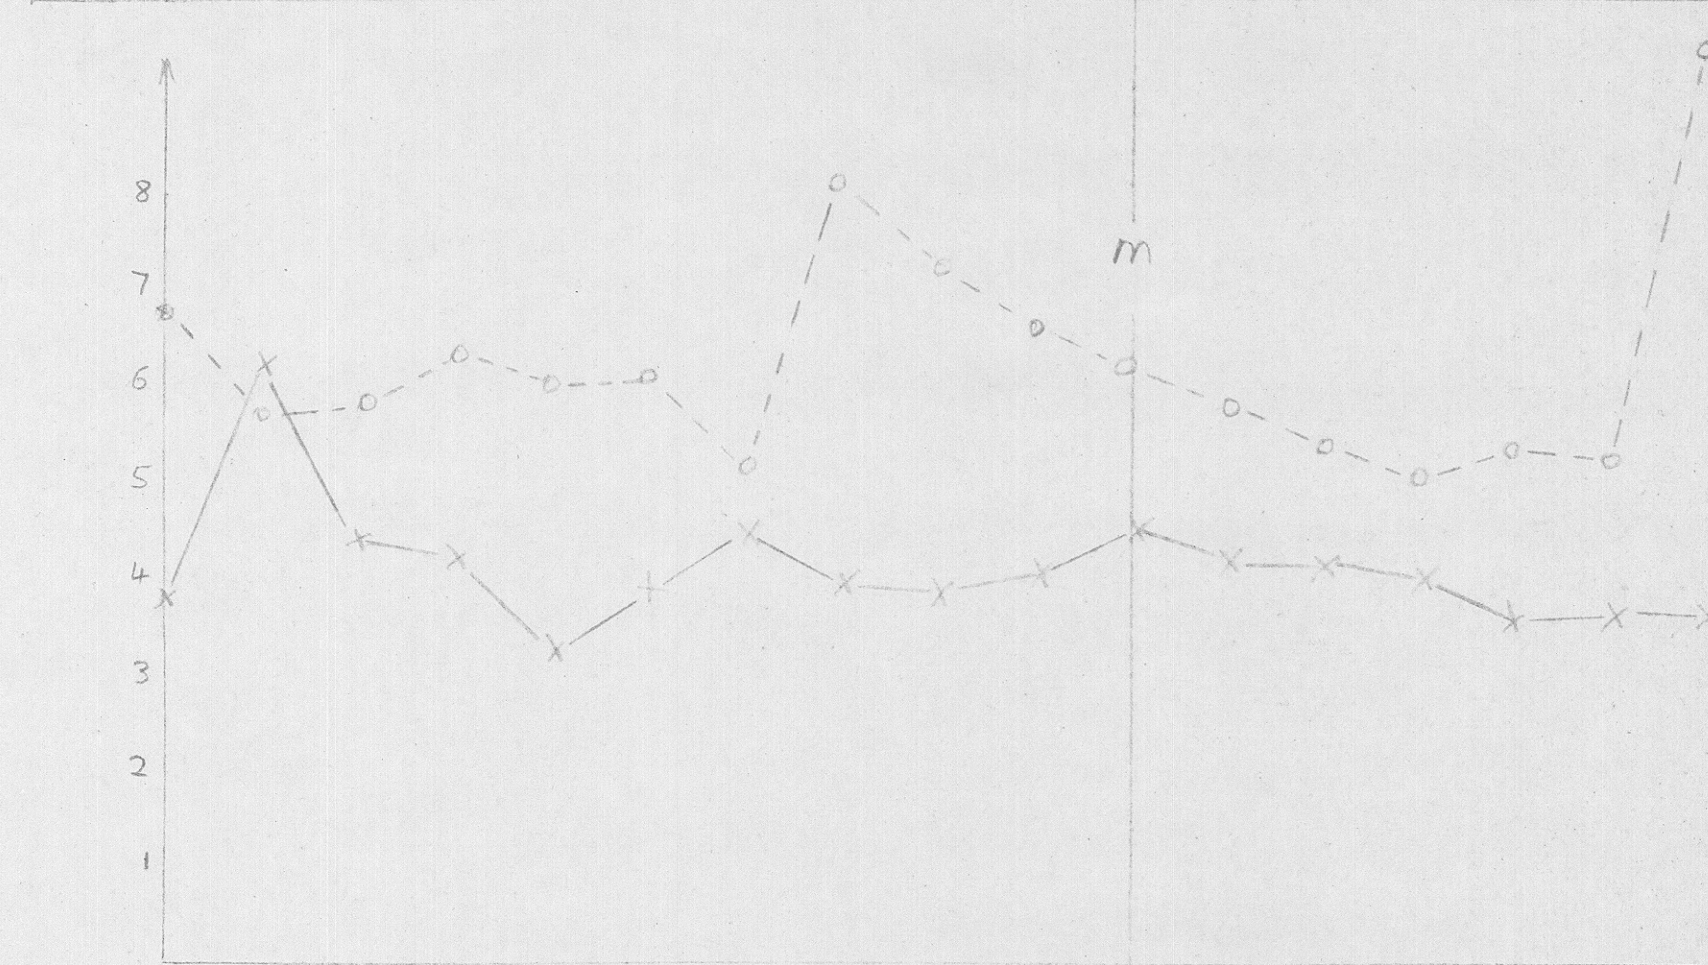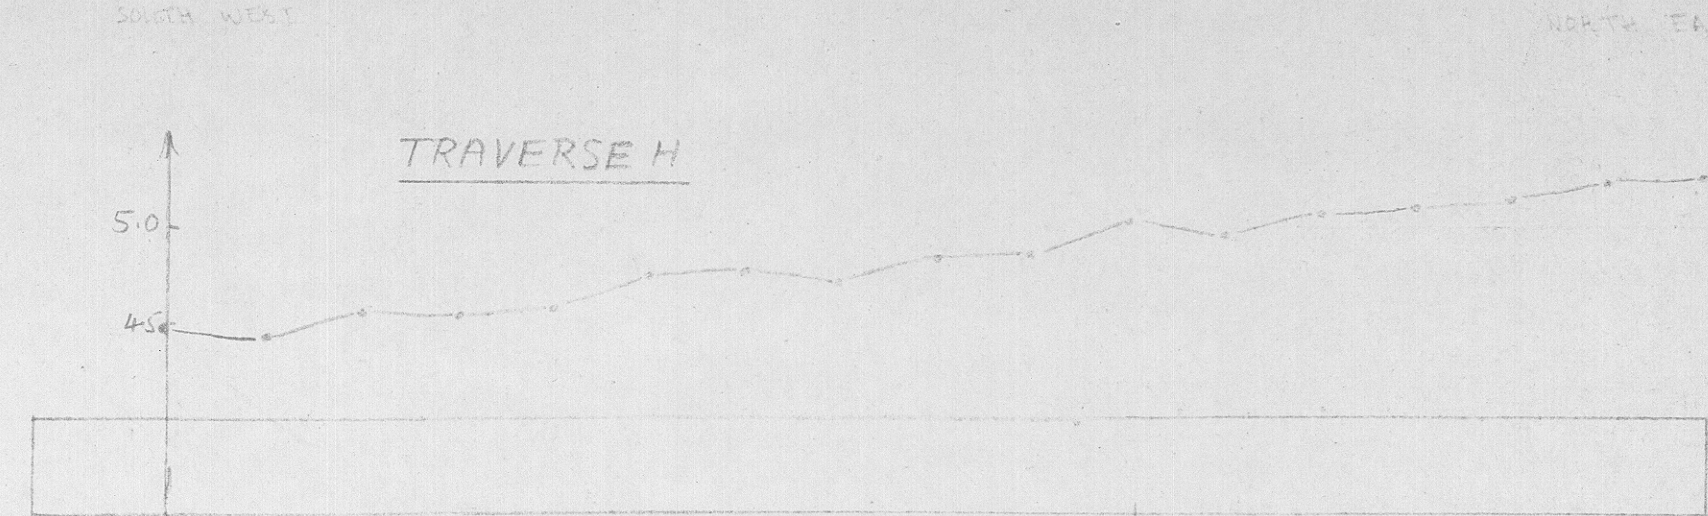

STATION	500	450	400	350	300	250	200	150	100	50	0	50	100	150	200	250	300
ELEVATION	50.0	48.1	45.7	43.2	41.5	38.0	37.0	36.0	34.5	33.4	31.5	30.1	27.5	26.0	24.7	23.2	19.8
DEPTH	183	165	169	149	149	148		121	128	111	106						

Magnetic Intensity
o--o--o Vertical
x--x--x Horizontal

Apparent Resistivity
o--o--o 50' Spacing
x--x--x 100' Spacing

5000 seismic velocity in ft/sec

GEOPHYSICAL SURVEY
FOR
GOLIATH PORTLAND
CEMENT Co. LTD.,
RAILTON, TASMANIA.
TRAVERSES G & H
SCALE
0 50 100 150 200 250 300

G 359-5