

4450

808

5 cm

APPENDIX 3

Full interference round for use in free-breaking material

Burden and spacing 2.5 m.

Middle row may be adjusted to take advantage of end-on free face.

Interval between any two adjacent shots in any direction Minimum  $\sim$  23 ms.

Maximum  $\sim$  315 ms.

Time to fire front row  $\sim$  155 ms.

Time to fire middle row  $\sim$  185 ms.

Time to fire back row  $\sim$  215 ms.

Total time (excluding overlaps) 495 ms.

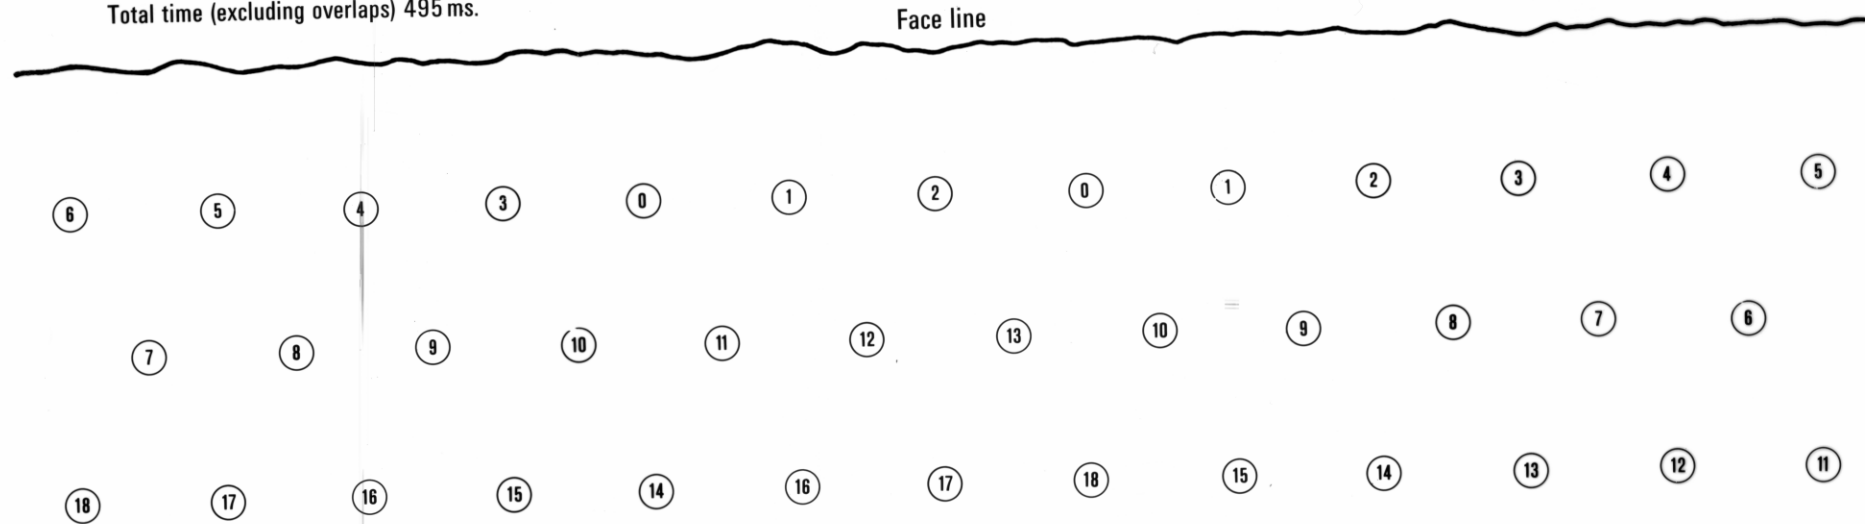


Figure 3

4450