


TASMANIA DEPARTMENT OF MINES


EXPLANATION SHEET FOR ENGINEERING LOGS

Borehole and excavation log

Penetration



Water



Notes - samples and tests

- U50 Undisturbed sample 50mm diameter.
- D Disturbed sample.
- N Standard penetrometer blow count for 300mm.
- N* SPT + sample.

Material classification

Based on Unified Soil Classification System. In Graphic Log materials are represented by clear contrasting symbols consistent for each project.

Moisture content

- D Dry, looks and feel dry.
 - M Moist, no free water on hand when remoulding.
 - W Wet, free water on hand when remoulding.
 - LL Liquid limit.
 - PL Plastic limit.
 - PI Plasticity Index.
- eg. M > PL - Moist, moisture content greater than the plastic limit.

Consistency

- | | | hand penetrometer (kPa) |
|-----|-------------|-------------------------|
| VS | Very soft. | < 25 |
| S | Soft. | 25 - 50 |
| F | Firm. | 50 - 100 |
| St | Stiff. | 100 - 200 |
| VSt | Very stiff. | 200 - 400 |
| H | Hard. | > 400 |
| Fb | Friable. | |


Notes: X on log is test result
 — is range of results.

Density index


- | | | % |
|----|---------------|----------|
| VL | Very loose. | 0 - 15 |
| L | Loose. | 15 - 35 |
| MD | Medium dense. | 35 - 65 |
| D | Dense. | 65 - 85 |
| VD | Very Dense | 85 - 100 |

Cored borehole log

Case - lift




Fluid loss



Lugeons

Lugeon units (pL) are a measure of rock mass permeability. For a 46 to 74mm diameter borehole 1 Lugeon is defined as a rate of loss of 1 litre per metre per minute. 1 Lugeon is roughly equivalent to a permeability of 1×10^{-4} mm/sec.

Graphic log

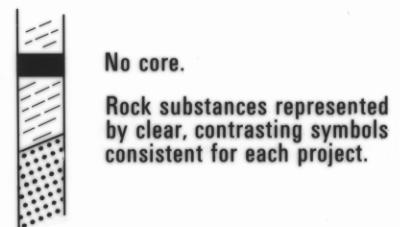

Weathering

- Fr Fresh.
- SW Slightly weathered.
- HW Highly weathered.
- EW Extremely weathered.

Strength

- | | | point load strength index $I_{5(50)}$ (MPa) |
|----|-----------------|---|
| EL | Extremely low. | < 0.03 |
| VL | Very low. | 0.03 - 0.1 |
| L | Low. | 0.1 - 0.3 |
| M | Medium. | 0.3 - 1 |
| H | High | 1 - 3 |
| VH | Very high. | 3 - 10 |
| EH | Extremely high. | > 10 |

Note: X on log is test result.

Significant defects

Significant defects shown graphically.

