

TASMANIAN DEPT OF MINES
GLADSTONE SURVEY
SP6 - SP126
FINAL STACK

RECORDING PARAMETERS
INSTRUMENT - DLR 1632
TRACE 1 FOLD 4
SPACING 7.5 METRES
SHOT DEPTH 1.5 METRES
NOVEMBER 1979

PROCESSING PARAMETERS
MS - 8SEC GATES
MS - SEC PANE
MS - SEC GATES
RUNNING IN KGS OPELT
S. I. STONEY JUNE 1980

FILTERS APPLIED
40-120HZ AT 300H
30-80 HZ AT 100H

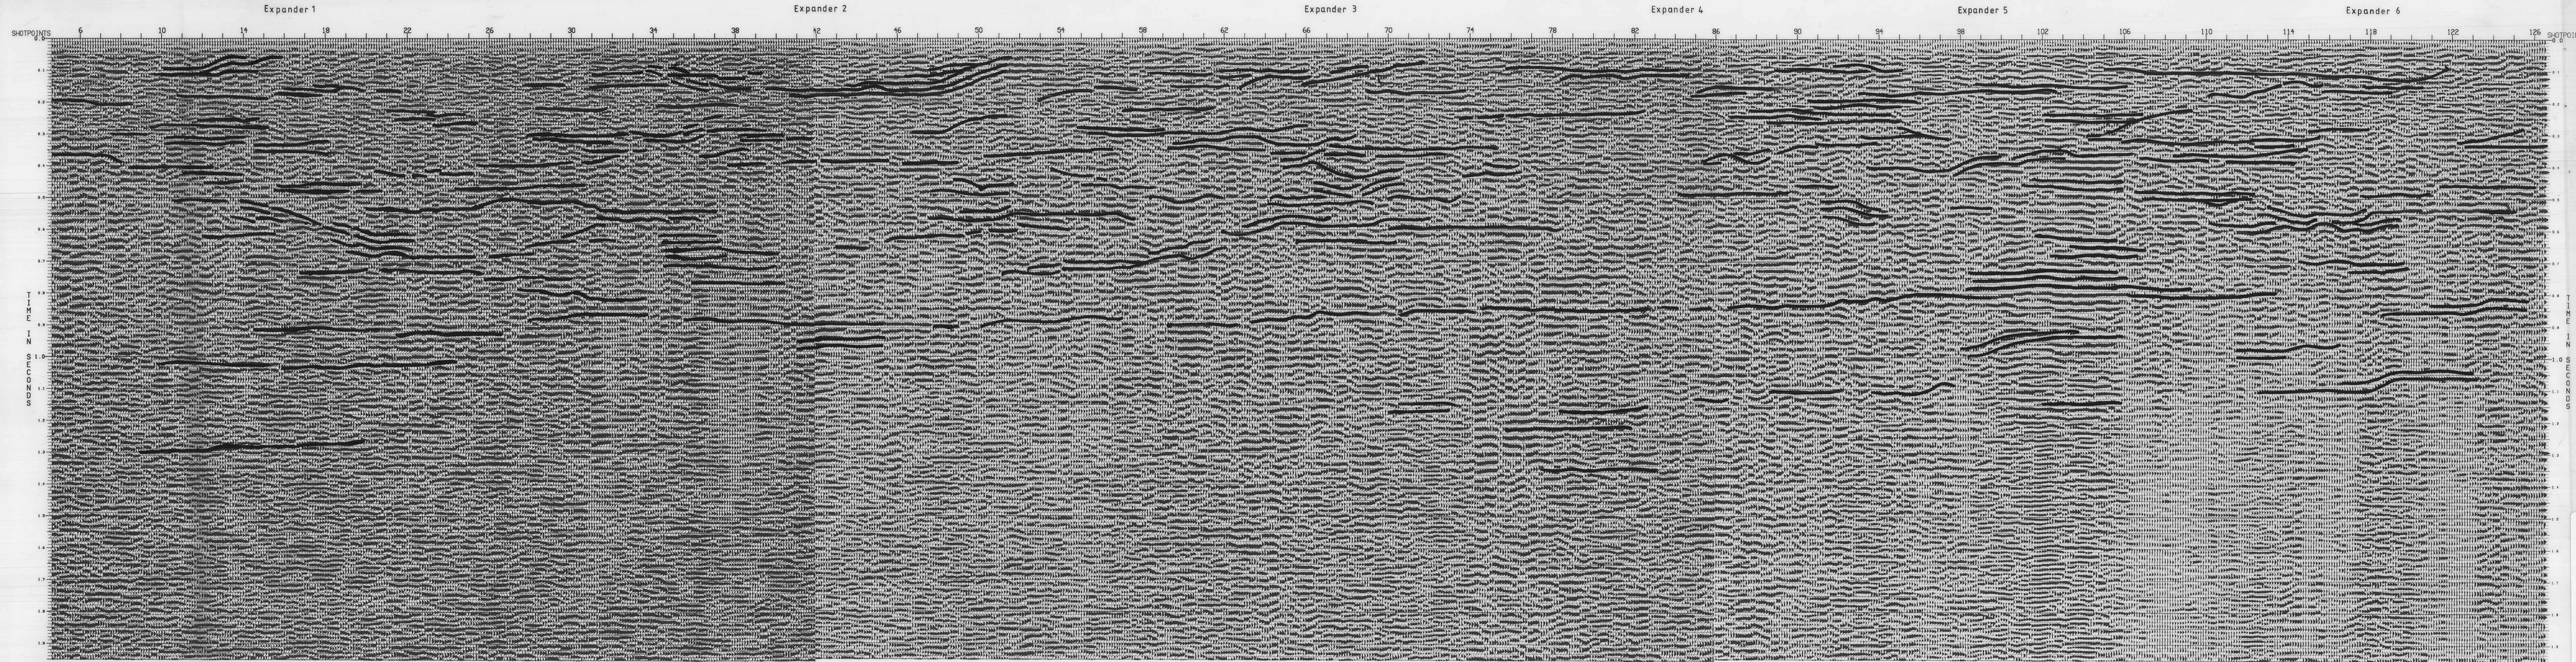


FIG 3

8-6

512

4770

5 cm

4770