


PLAN VIEW

ITEM	DESCRIPTION OR TITLE	QUANTITY	DRAWING NO.
1	OUTER BODY	1	4826/1
2	INNER BODY	1	" /2
3	COVER - UPPER OUTER	1	" /3
4	" INNER	2	" /4
5	" LOWER OUTER	1	" /5
6	ROLLER SKF N° RC-12x18	48	" /6
7	RAMP - FIXED	2	" /7
8	BRAKE SHOE	2	" /8
9	BELLVILLE SPRINGS	312	" /9
10	BRAKE LINING	22	" /10
11	GUIDE BLOCK - INNER	1	" /11
12	" OUTER	1	" /12
13	BUFFER BLOCK - INNER	1	" /13
14	BUFFER BLOCK - OUTER	1	" /14
15	WITHDRAW SPRING	4	" /15
16	SHIM	1	" /16
17	ACTUATOR SPRING	2	" /17
18	BRACKET - ACTUATOR SPRING	1	" /18
19	TOGGLE LEVER	1	" /19
20	BRACKET FOR INNER ROPE GUIDE	1	" /20
21	" OUTER "	1	" /21
22	TOGGLE LINK	2	" /22
23	ROPE GUIDE - OUTER	1	" /23
24	" INNER	1	" /24
25	BOLT M8x1.0 120mm LG	1	" /25
26	NUT M8x1.0	1	" /26
27	SPACER	1	" /27
28	SHOULDER BOLT	4	" /28
29	BOLT M8x1.25 25mm LG	24	" /29
30	BLIND RIVET ST. STEEL 3mmφx8mm LG	84	" /30
31	BOLT M6x1.0 15mm LG	4	" /31
32	BOLT M8x1.0 22mm LG	8	" /32
33	NUT M6	5	" /33
34	GUIDE PIN	2	" /34
35	SPACER	2	" /35
36	NUT M16x1.5	12	" /36
37	STUD	12	" /37
38	PLAIN WASHER	12	" /38
39	SCREW CSK HD M6 10mm LG	12	" /39
40	BOLT M10x1.25 30mm LG	4	" /40
41	ROLLER CAGE	2	" /41

- NOTES
- THIS UNIT IS DESIGNED FOR 25mm ROPE AND A MAXIMUM SUSPENDED LOAD OF 5 TONNES.
 - DIMENSION X SHOULD BE 75mm WITH THE BRAKE IN THE TRAIL POSITION.
TO CHECK X TRIP THE BRAKE WITH THE CONVEYANCE STATIONARY AND ADJUST AS NECESSARY BY ADDING OR SUBTRACTING SHIMS ITEM 16

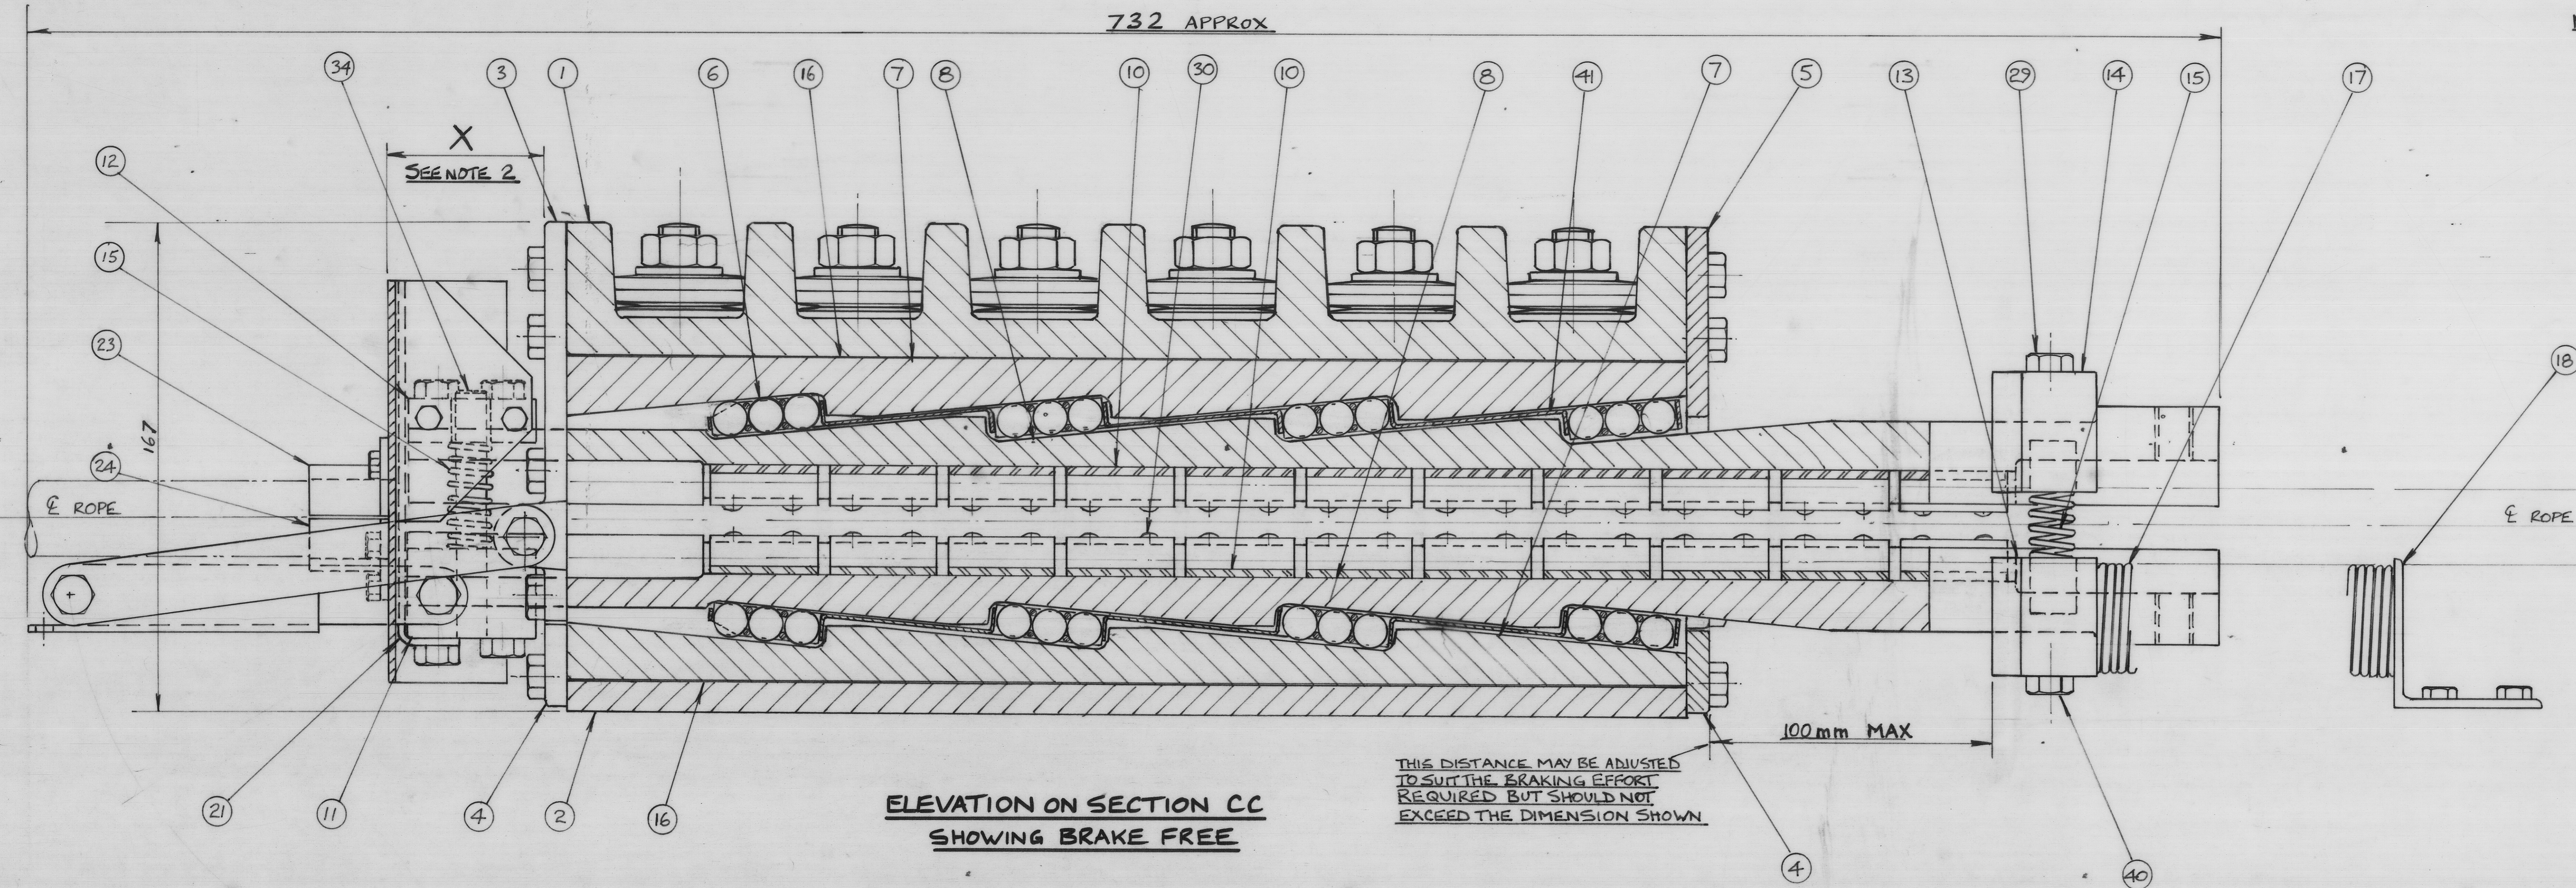

ELEVATION ON SECTION CC SHOWING BRAKE FREE

THIS DISTANCE MAY BE ADJUSTED TO SUIT THE BRAKING EFFORT REQUIRED BUT SHOULD NOT EXCEED THE DIMENSION SHOWN

SHAFT CONVEYANCE (CAGE) SAFETY BRAKE

MBA