


ITEM	DESCRIPTION OR TITLE	QTY	DRWING
1	OUTER BODY	1	4826/1
2	INNER BODY	1	1/2
3	COVER UPPER OUTER	2	1/2
4	INSIDE	1	1/2
5	LOWER OUTER	1	1/2
6	ROLLER SKF NO RC-12x18	48	1/2
7	RAPE - FIXED	2	1/2
8	BRAKE SHOE	2	1/2
9	BEAUVILLE SPRINGS	312	1/2
10	BRAKE LINING	22	1/2
11	GUIDE BLOCK - INNER	1	1/2
12	" " " " OUTER	1	1/2
13	BUFFER BLOCK - INNER	1	1/2
14	BUFFER BLOCK - OUTER	1	1/2
15	WITHDRAW SPRING	4	1/2
16	SHIM	2	1/2
17	ACTUATOR SPRING	1	1/2
18	BRACKET - ACTUATOR SPRING	1	1/2
19	TOGGLE LEVER	1	1/2
20	BRACKET FOR INNER ROPE GUIDE	1	1/2
21	" " " " OUTER	1	1/2
22	TOGGLE LINK	1	1/2
23	ROPE GUIDE - OUTER	2	1/2
24	" " " " INNER	1	1/2
25	BOLT M8x10 122mm LG	2	1/2
26	NUT M8x10	2	1/2
27	SPACER	1	1/2
28	SHOULDER BOLT	4	1/2
29	BOLT M8x1.25 25mm LG	24	1/2
30	BLIND RIVET ST STEEL 3mm dia x 8mm LG	124	1/2
31	BOLT M6x1.0 15mm LG	4	1/2
32	BOLT M8x1.0 22mm LG	2	1/2
33	NUT M6	2	1/2
34	GUIDE PIN	2	1/2
35	SPACER	2	1/2
36	NUT M16x1.5	12	1/2
37	STUD	12	1/2
38	DIAM WASHER	12	1/2
39	DRIVE CSK HD M6 10mm LG	4	1/2
40	BOLT M10x1.25 20mm LG	2	1/2
41	ROLLER CAGE	2	1/2

- NOTES:
- THIS UNIT IS DESIGNED FOR 25mm ROPE AND A MAXIMUM SUSPENDED LOAD OF 5 TONNES.
 - DIMENSION X SHOULD BE 75mm WITH THE BRAKE IN THE TRIP POSITION.
- TO CHECK X TRIP THE BRAKE WITH THE CONVEYANCE STATIONARY AND ADJUST AS NECESSARY BY ADDING OR SUBTRACTING SHIMS ITEM 16.

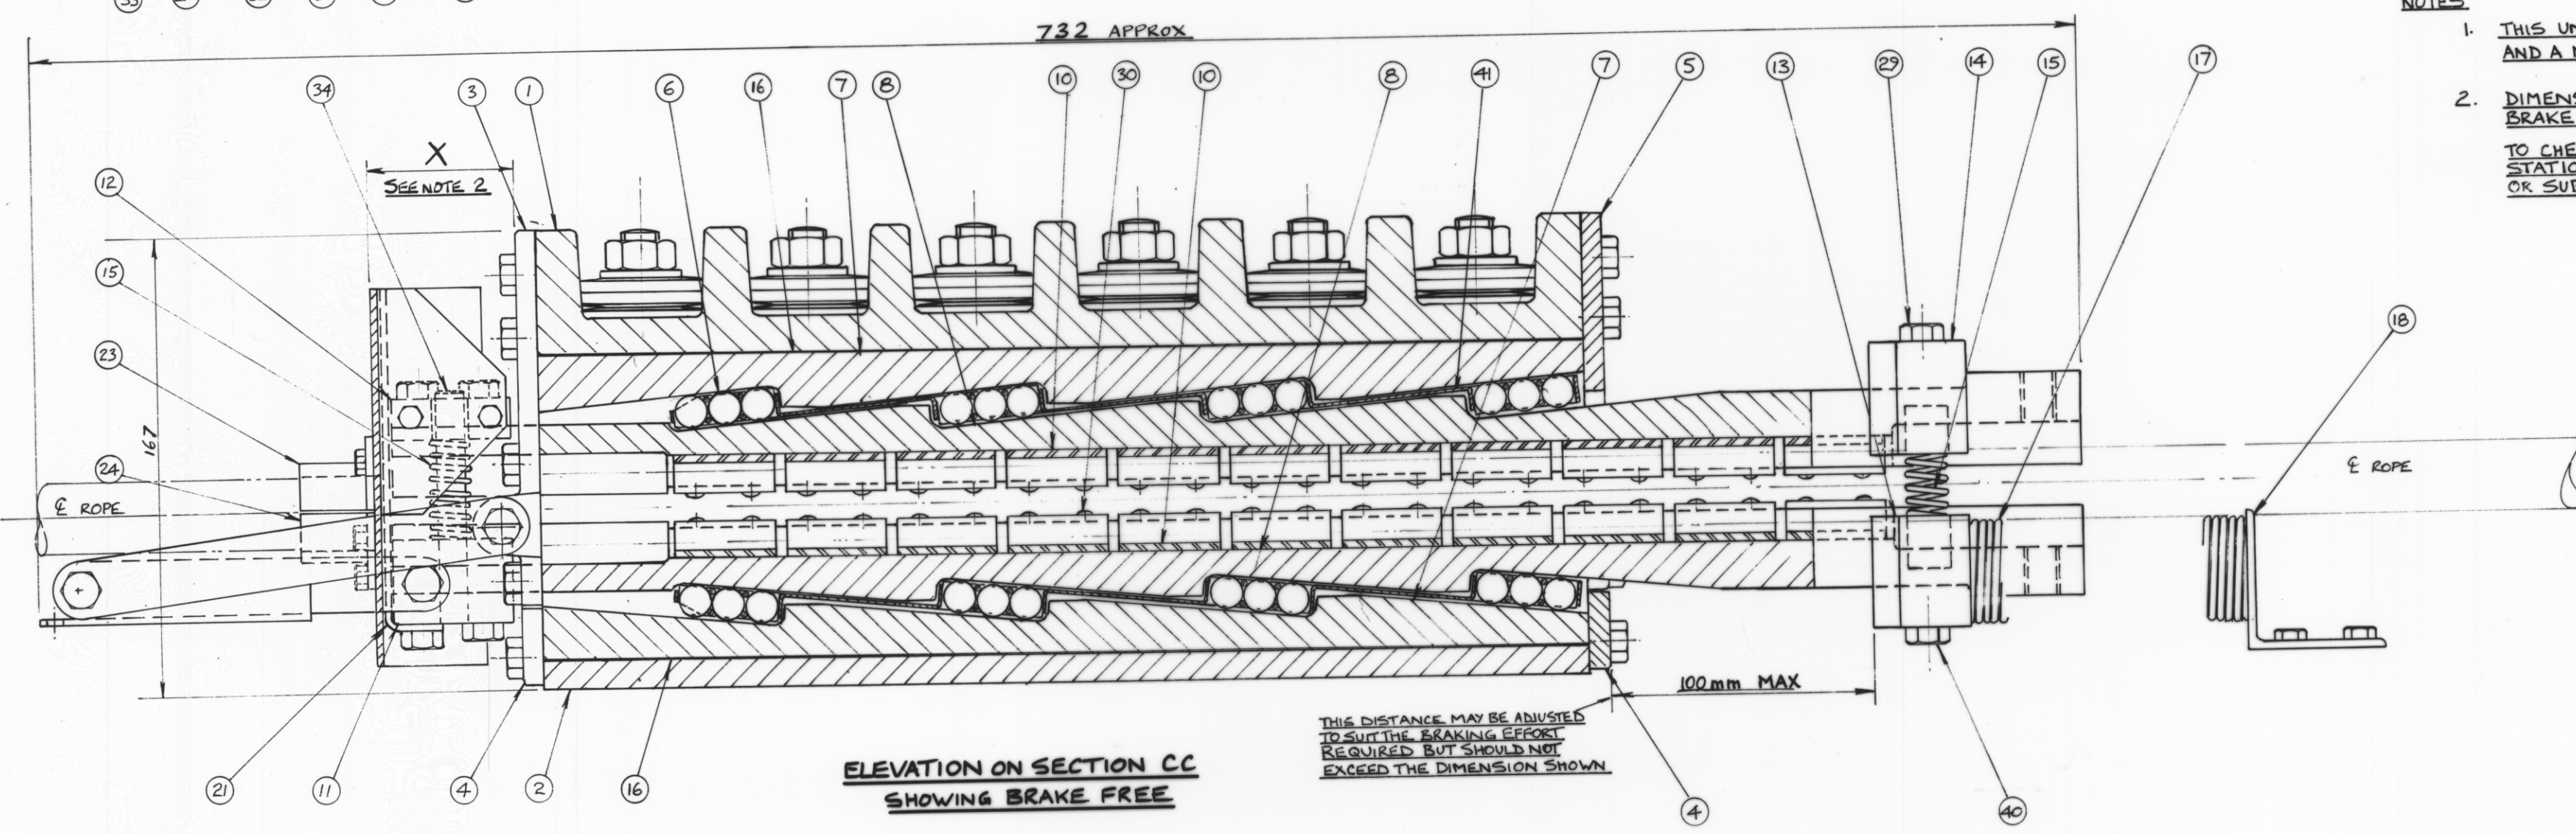

SHAFT CONVEYANCE (CAGE) SAFETY BRAKE

4826 SH 1 OF 2 SHEETS

REV 2 15-10-82 REV 1 9-82

