


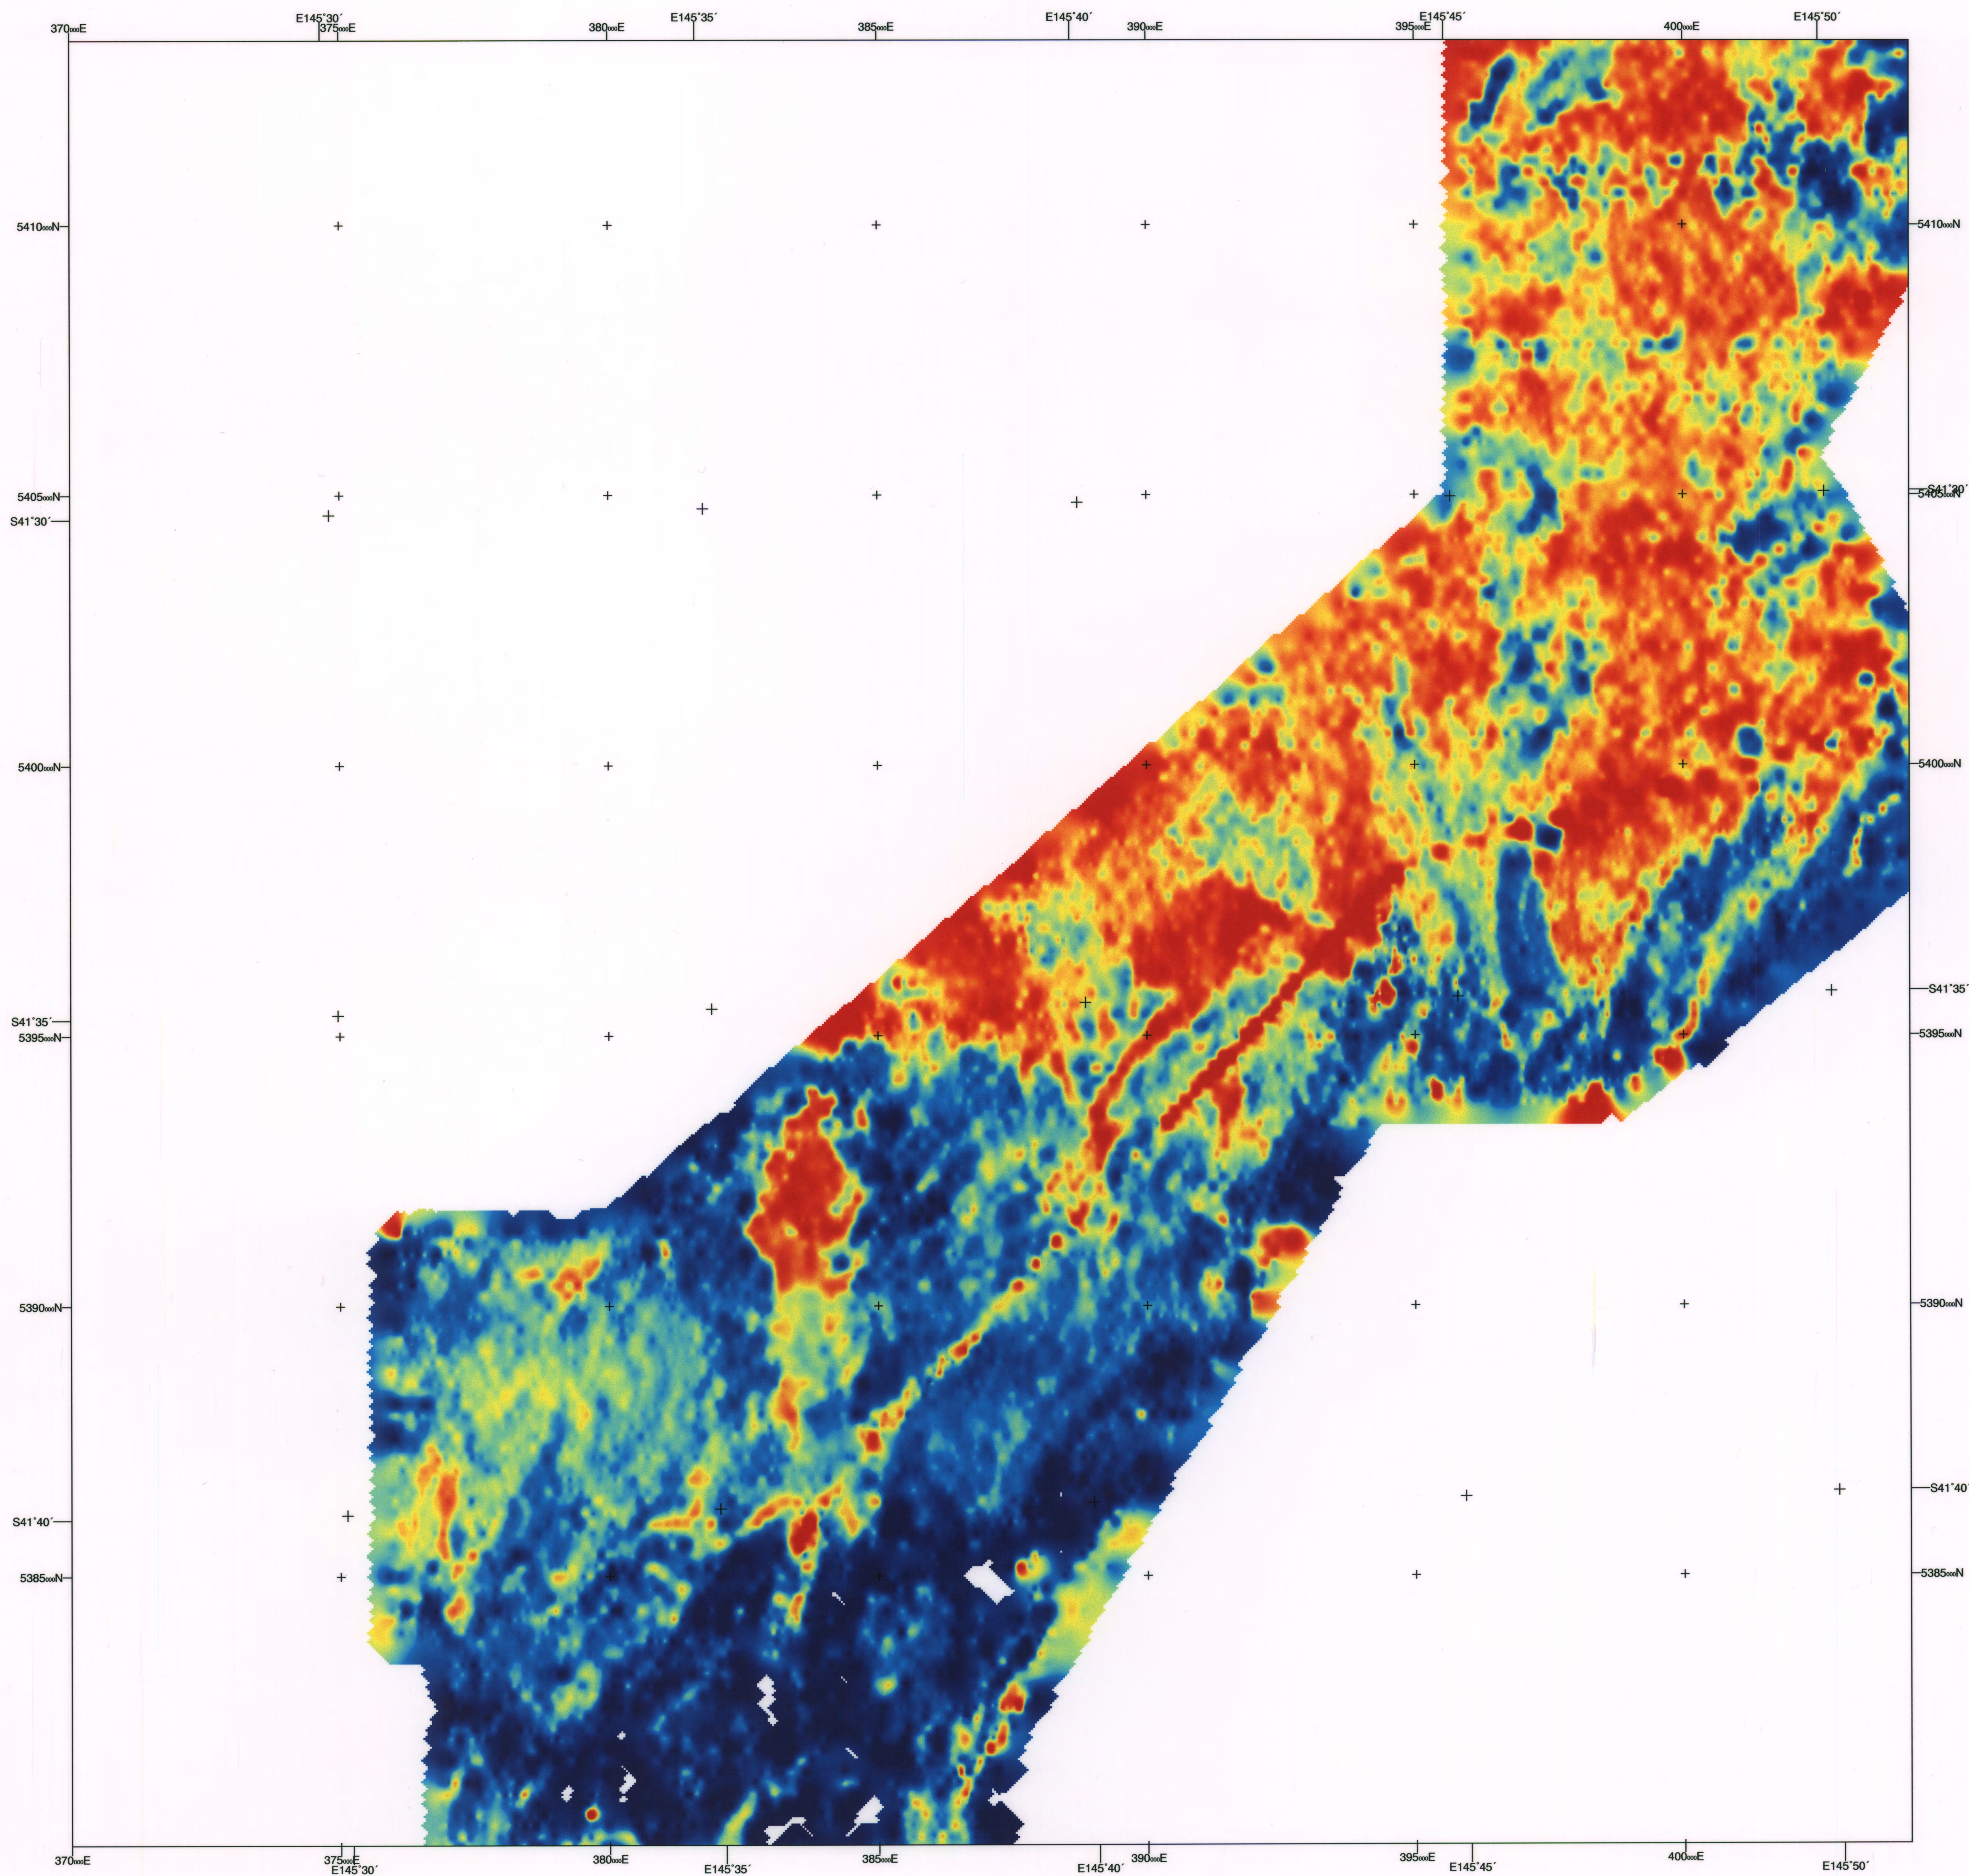

AIRBORNE SURVEY EQUIPMENT


Aircraft	AS-350BA "Squirrel" helicopter VH-RTV
Electromagnetic System	Hummingbird towed 30m below aircraft, multi-coil, five frequency system manufactured by Geotech Pty Ltd of Toronto, Canada
Operating Frequencies	Coplanar coils at 800, 600 and 34133 Hertz plus coaxial coils at 990 and 7001 Hertz
Magnetometer	Geometrics G-822A Caesium Vapour Resolution 0.001 nT
Recording Interval	Electromagnetic system 0.1 sec (approx 3.5 metres) Magnetometer 0.1 sec (approx 3.5 metres)
EM System Clearance	EM & magnetic sensor boom 30 metres
Navigation	Real time differential GPS system Ashtech G12 receiver OmniStar LR3000 virtual base station
Acquisition System	Geo Instruments Model 2002

AIRBORNE SURVEY SPECIFICATIONS



Flight Line Direction	090 - 270 degrees
Flight Line Separation	200 metres
Tie Line Direction	000 - 180 degrees
Tie Line Separation	2000 metres
Terrain Clearance	60 metres
Survey Flown	January 2001 - April 2002
Geo Instruments Job Number	2113

DATA PROCESSING

System parallax and spherics removed	
Data drift corrected and micro-levelled	
Grid algorithm	Akima Spline
Grid cell size	40 x 40 metres

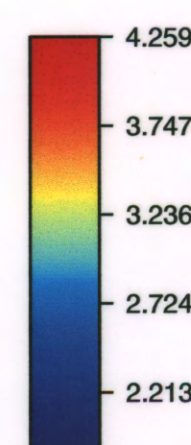

micro Siemens/metre (logarithmic)

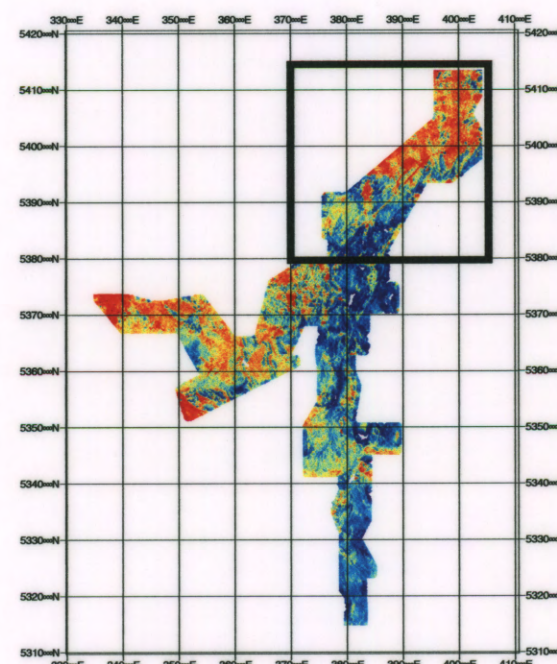Scale 1:50 000
DATUM : AGD66
PROJECTION : AMG
ZONE : 55WESTERN TASMANIAN REGIONAL MINERALS PROGRAM
Mt Read Volcanics / Heemskirk GraniteAirborne Geophysical Survey
34133 Hz Electromagnetic Conductivity ImageDATE: June 2002
SCALE: 1:50 000
BY: Geo Instruments
REF.
PLAN NO.