


**NOTES.**

SLIME TABLE & SAND TABLE. Foundations are to be carried 18" above floor level & bedded 2'0" min. below floor level. Consult Mines Dept. for foundations to motors for both tables. Form 2" square holes where indicated for 3/8" dia. holding down bolts.

VANNER. Consult Mines Dept. for foundation blocks. Holding down bolts where indicated are 3/2" dia.

BALL MILL. All sides battered 2" per foot.

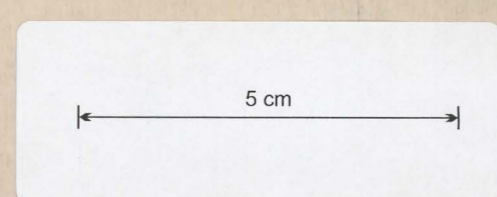

DEPARTMENT OF PUBLIC WORKS - TASMANIA		
MINES DEPARTMENT LAUNCESTON		
LABORATORY EXTENSIONS.		
SCALE: 1/4" = 1'0"	DRAWN BY: G.R.R.	WORKING DRG.
<i>G. R. Ross</i> DISTRICT ARCHITECT	TRACED BY:	
	EXAMINED BY:	DRAWING No.:
	DATE: 22-5-63	LC/3729
C. D. ROSS, CHIEF ARCHITECT		