

APPENDIX A

BORE AND DRILL LOG RECORD SHEETS

LOCATION OF BOREHOLES

Borehole No.	Co-Ordinates		Reduced Level		Date	
	N(m)	E(m)	Top	Bottom	Start	Finish
Over Water:-						
D1	257365	324804	-7.0	-57.32	30.3.76	8.4.76
D2	257419	324851	-8.0	-50.60	9.3.76	24.3.76
D3	257307	324754	-5.7	-40.14	21.4.76	11.5.76
D4	257780	325160	-8.0	-30.33	2.6.76	8.6.76
D5	257661	325060	-14.0	-43.85	24.5.76	28.5.76
D6	257481	324904	-6.8	-43.23	17.5.76	20.5.76
D7	257389	324825	-8.0	-52.69	10.6.76	15.6.76
D8	257375	324813	-8.0	-51.54	16.6.76	18.6.76
D9	257369	324813	-8.0	-54.28	21.6.76	6.7.76
D10	257293	324744	-2.0	-25.66	8.7.76	27.7.76
D11	257305	324753	-6.0	-29.84	2.8.76	4.8.76

East Abutment:-

E1	257985	325347	+6.99	-8.20	27.7.76	6.8.76
E2	257996	325334	+7.42	-7.18	6.8.76	18.8.76

West Abutment:-

W1	257257	324712	+12.07	+0.00	27.4.76	5.5.76
W2	257246	324702	+17.35	-2.92	18.8.76	31.8.76

West Approach Cutting:-

WA1	257171	324638	+33.80	+16.44	6.5.76	25.5.76
WA2	257086	324564	+29.78	+14.53	26.5.76	8.6.76
WA3	257014	324473	+24.78	+13.51	10.6.76	21.6.76

Boreholes Over Water for Feasibility Studies:-


X J1	257206	324925	-7.5	-48.08	May 1975
J3	257605	324882	-8.8	-42.17	Sept. 1975
J4	257349	324750	-6.3	-48.60	Sept. 1975

No. 1 Six Boreholes put down in August to October, 1963,
to approximate locations shown on Drawing No. 2,
No. 6 Results reported by I. B. Jennings, 1964.


Note: Holes J1, J3 and J4 were previously
No. BH1, BH3, and BH4 respectively.

SEISMIC SPREADS (APPROXIMATE LOCATIONS ONLY)
 — (1) TO (22) DEPARTMENT OF MINES REPORT 1975 / 32
 — 1 TO 11 DEPARTMENT OF MINES REPORT 1975 / 39

BOREHOLES - PHASE 1 SITE
 ⊗ D1 TO D11 ON ALL WEST WEST
 W1, W2 & E1, E2 WEST
 WA1 TO WA3 WEST
 BOREHOLES - PRIOR TO PHASE 1
 ⊗ J1, J2, J4 FEASIBILITY AFTER
 N° 1 TO N° 6

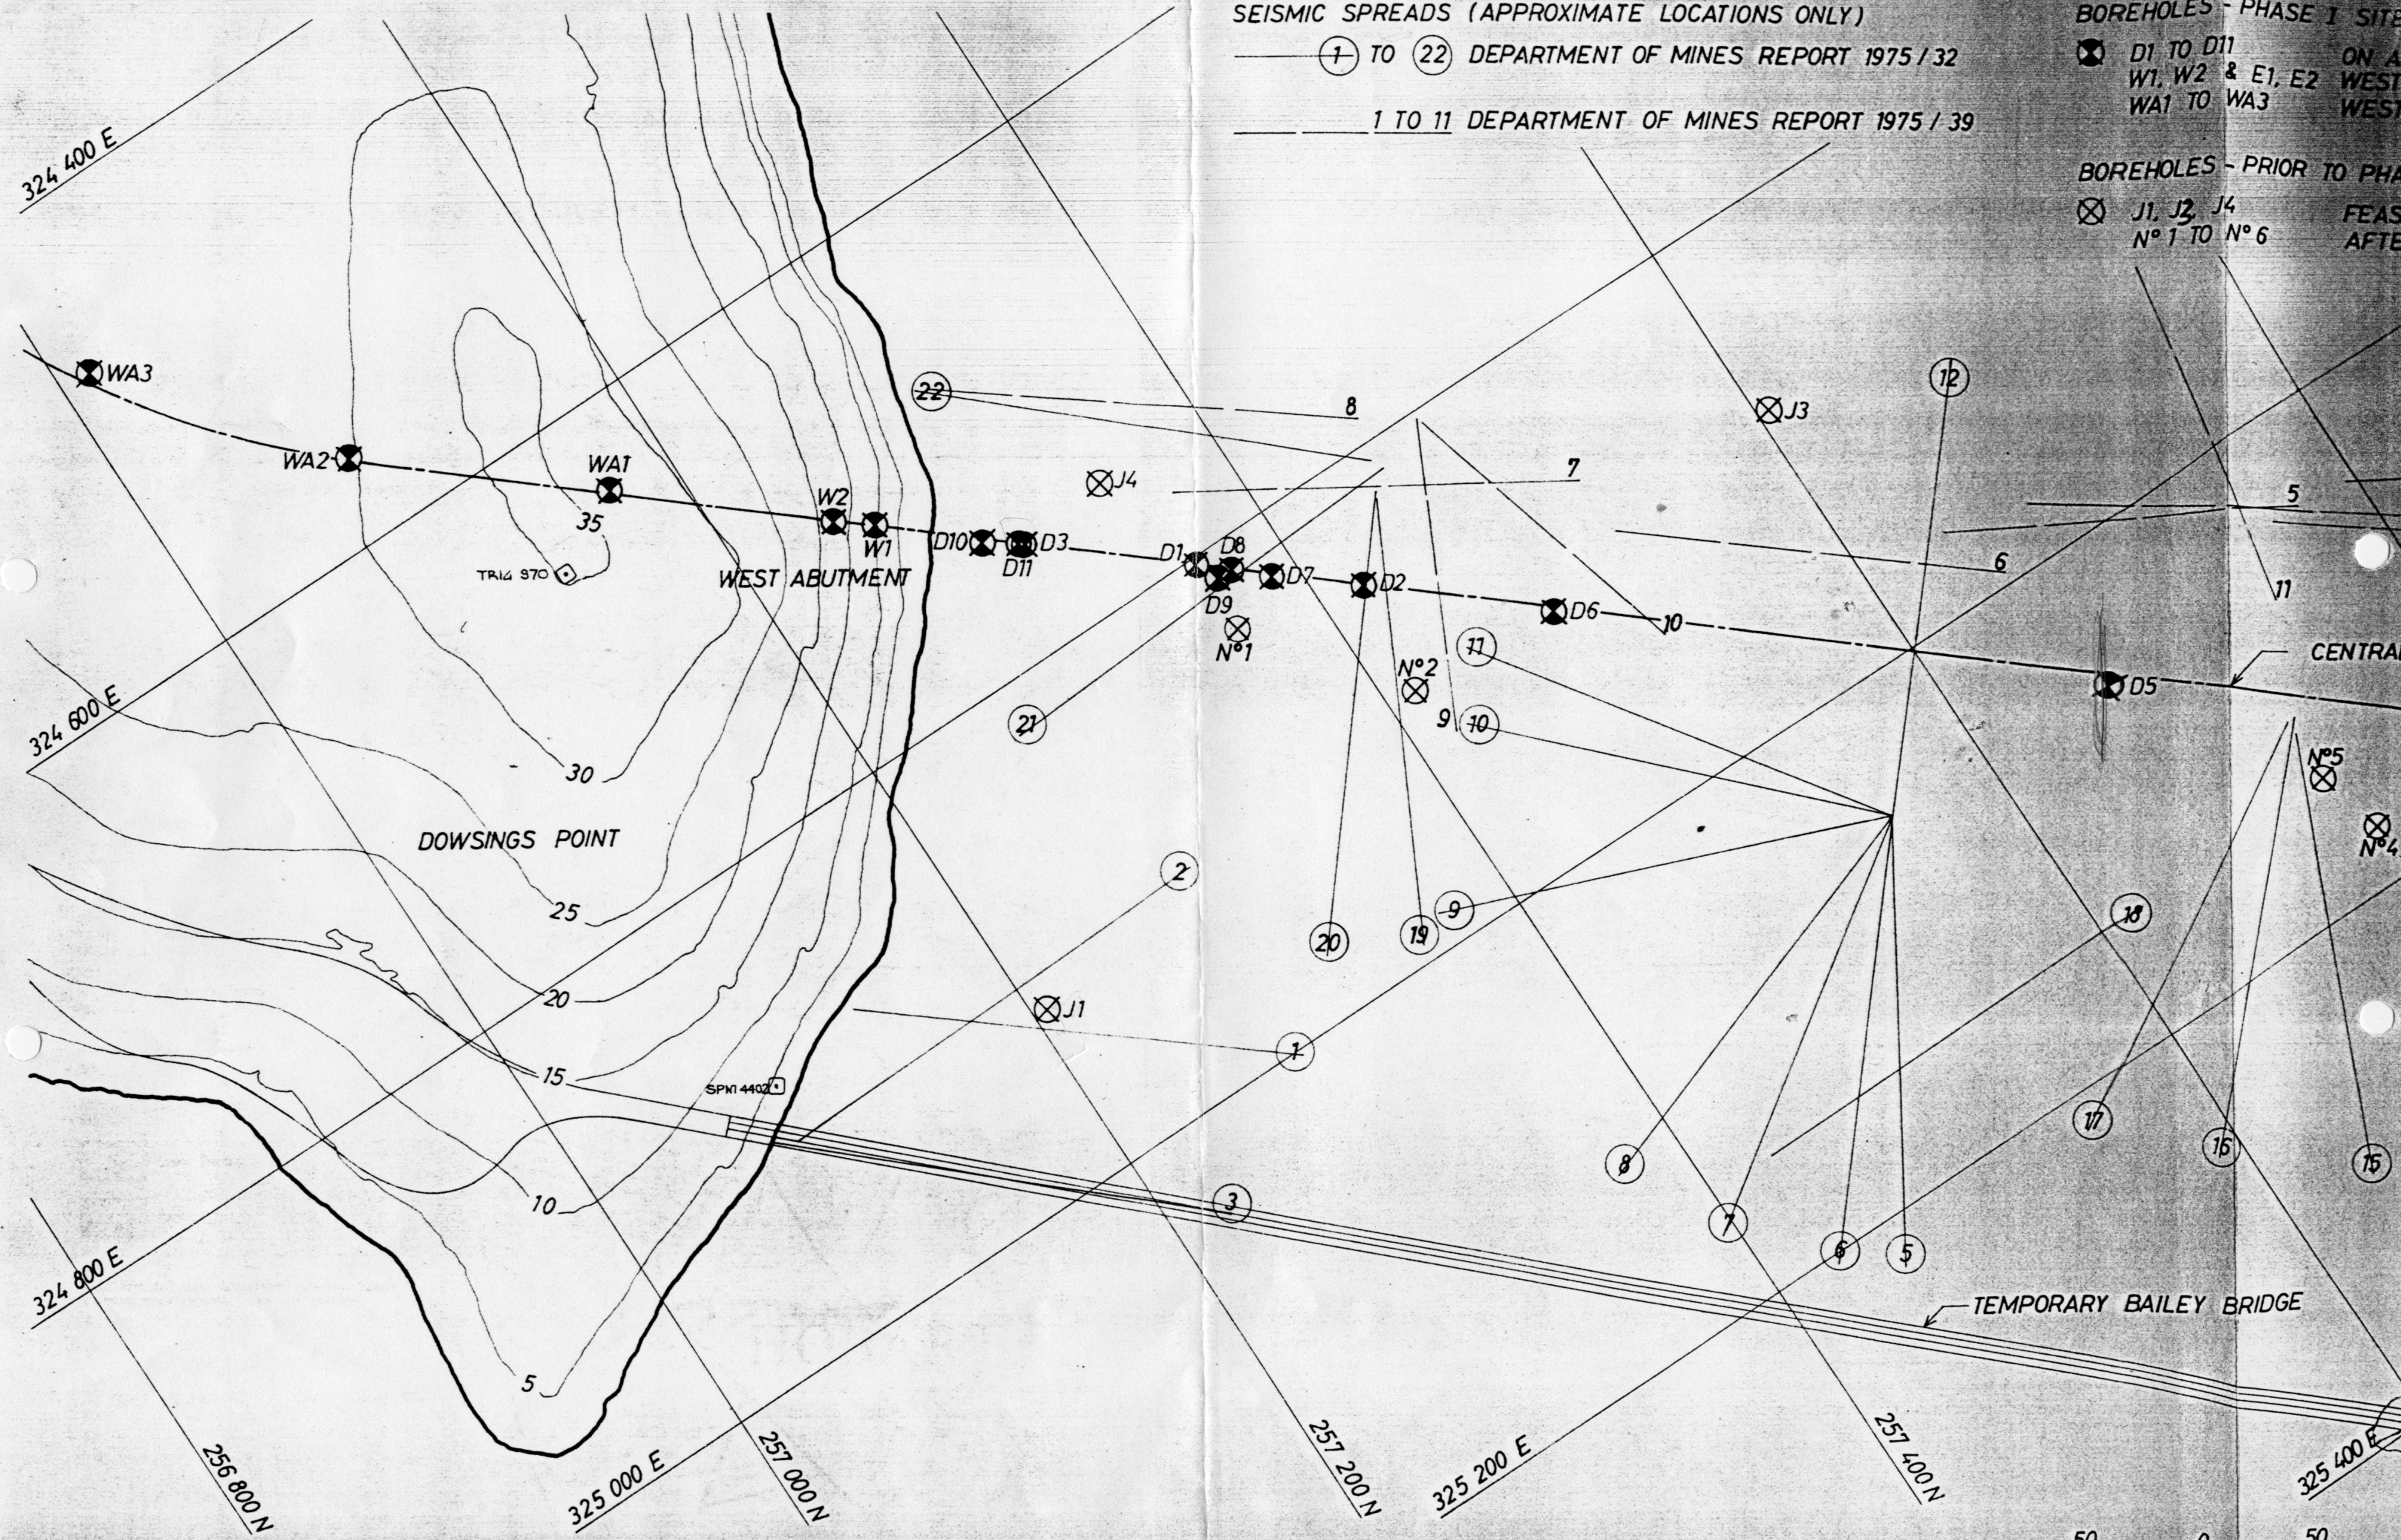

21 244

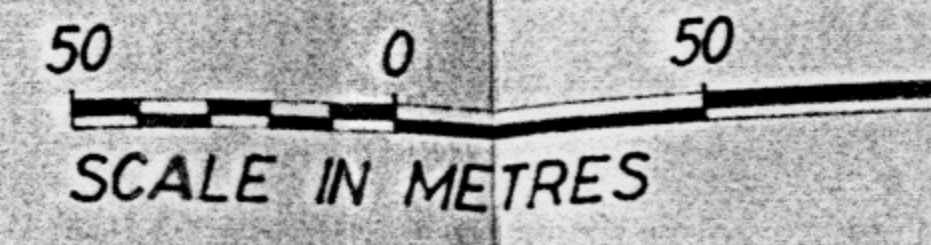

SEISMIC SPREADS (APPROXIMATE LOCATIONS ONLY)

① TO ②② DEPARTMENT OF MINES REPORT 1975 / 32


① TO ①① DEPARTMENT OF MINES REPORT 1975 / 39

BOREHOLES - PHASE I SITE INVESTIGATION

⊗ D1 TO D11 ON ALIGNMENT OVER WATER
W1, W2 & E1, E2 WEST / EAST ABUTMENTS
WA1 TO WA3 WEST APPROACH CUTTING

BOREHOLES - PRIOR TO PHASE I

⊗ J1, J2, J4 FEASIBILITY INVESTIGATIONS 1975
N° 1 TO N° 6 AFTER I.B. JENNINGS 1963 (APPROX. ONLY)

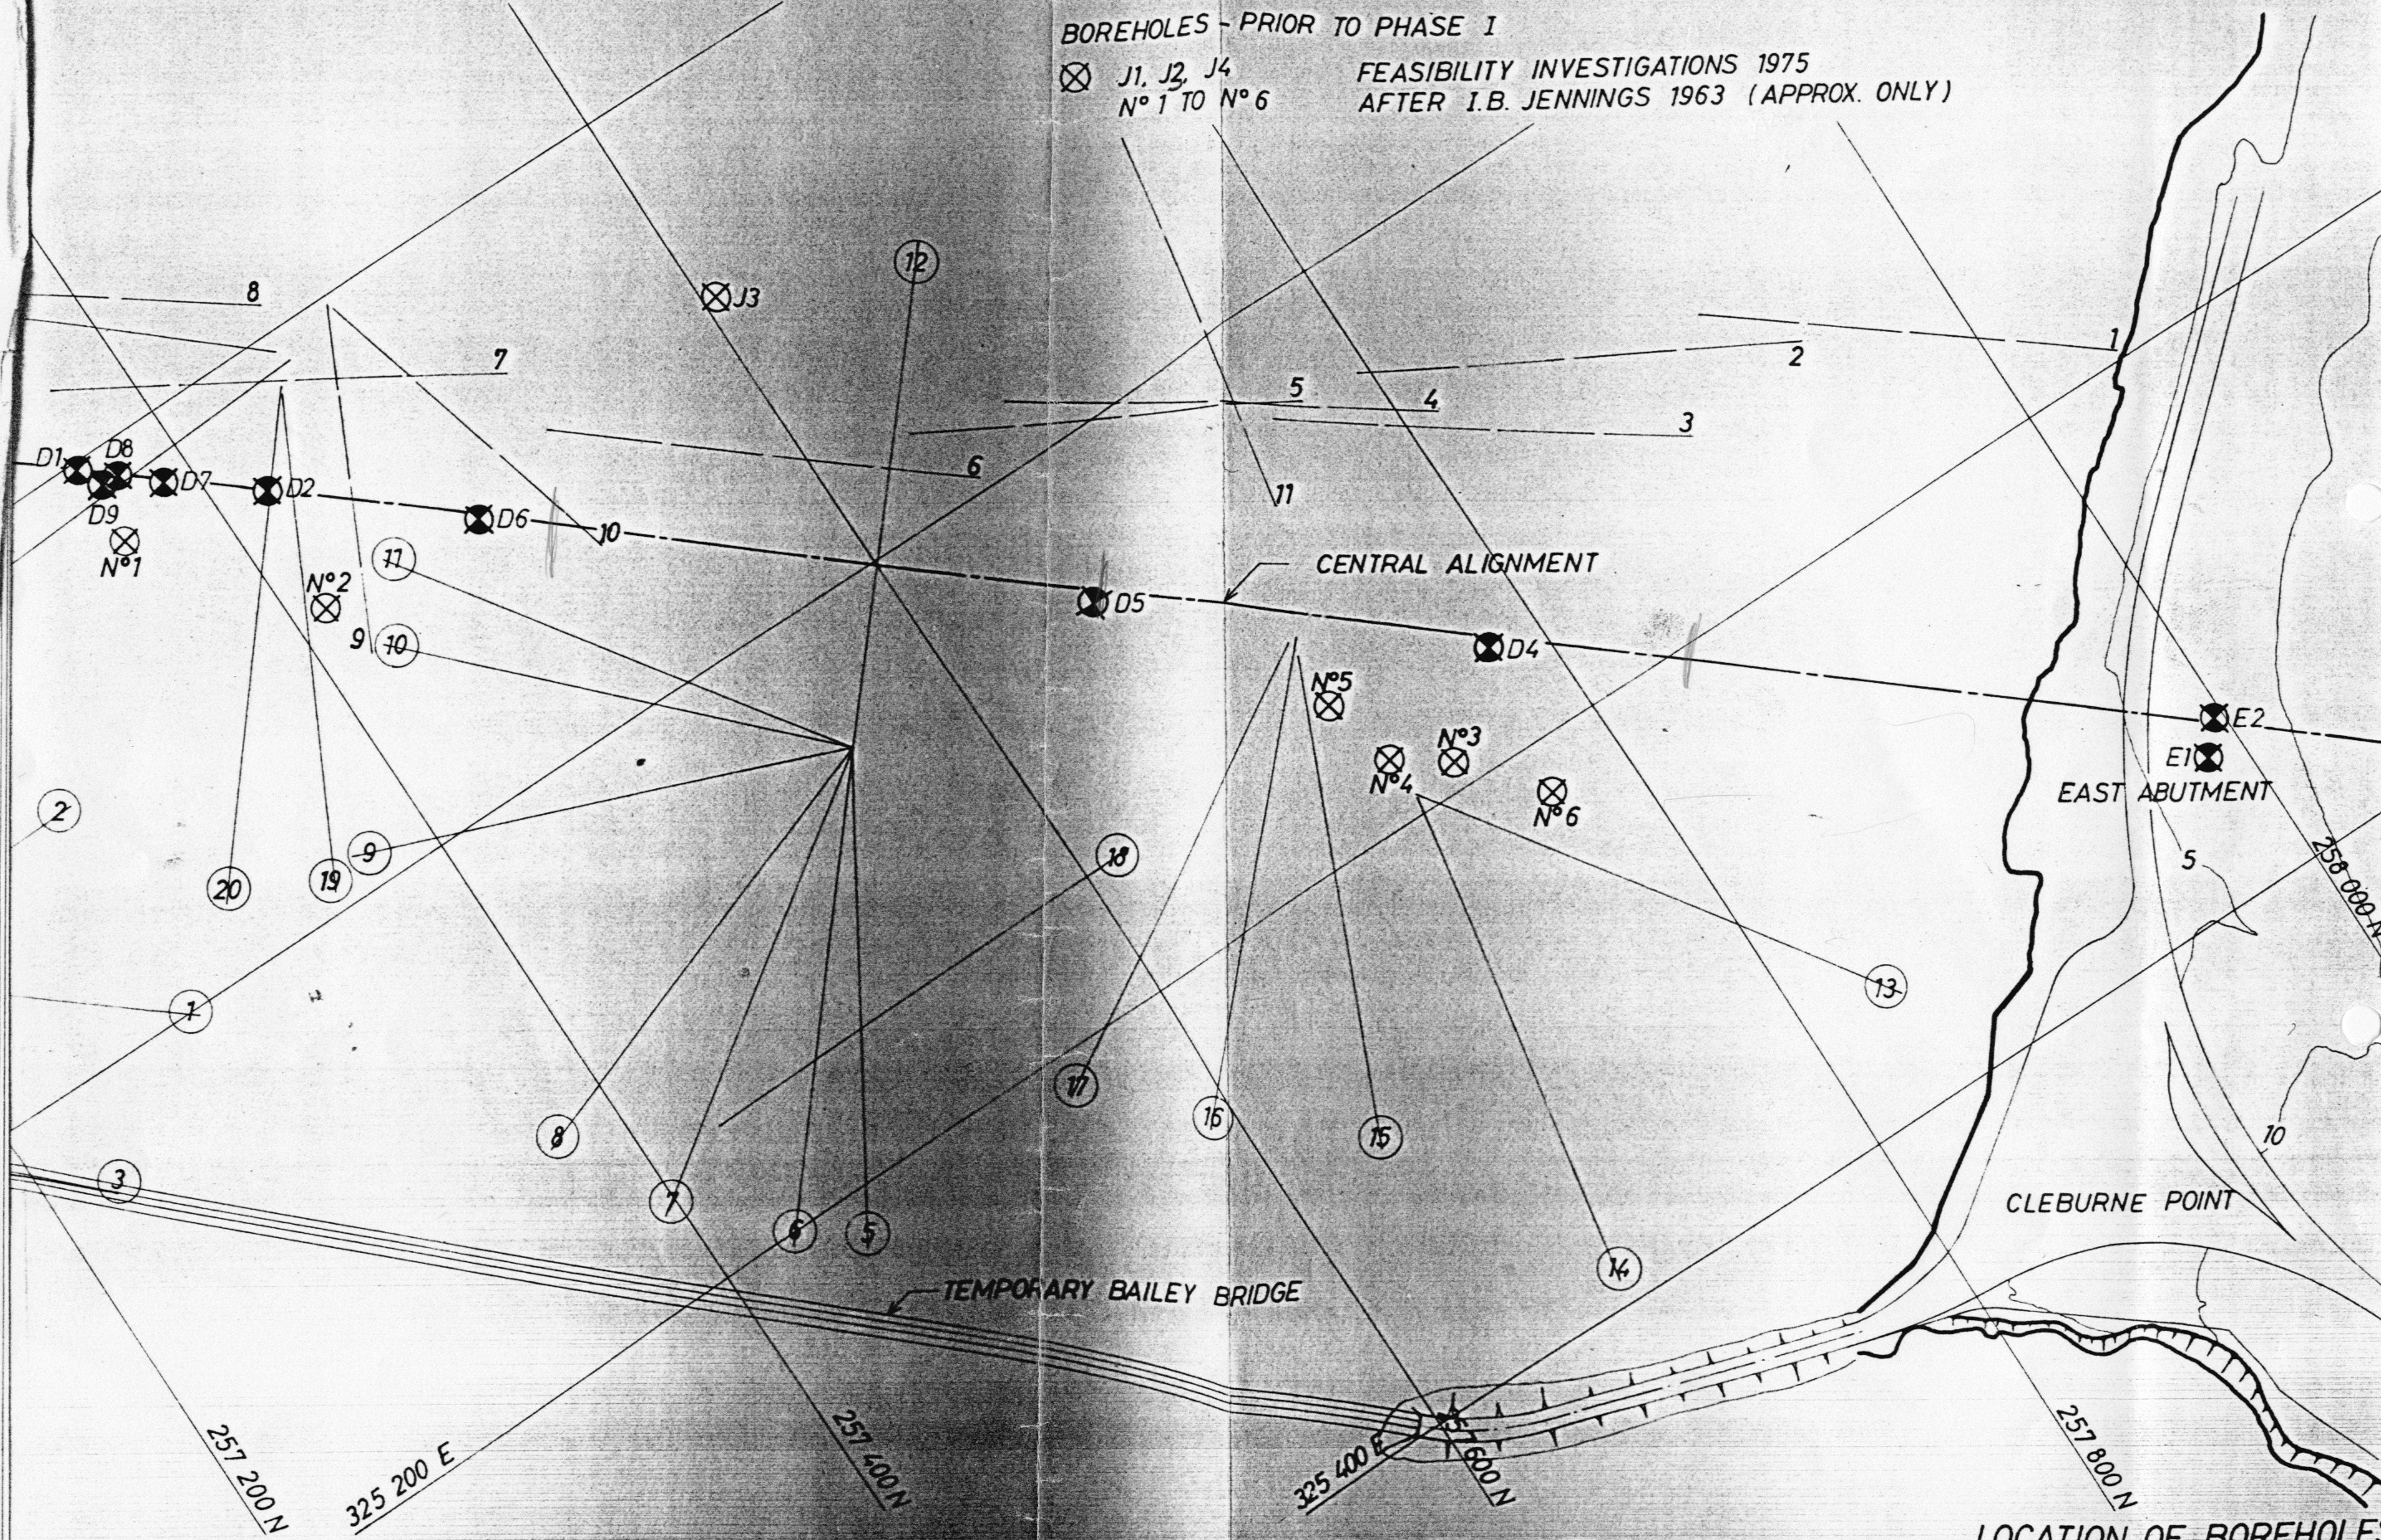

LOCATION OF BOREHOLES AND SEISMIC SPREADS
SECOND HOBART BRIDGE

mania

iage

ation

76

Ltd
neers

21 245



REF No 18325
 DEPARTMENT OF PUBLIC WORKS TASMANIA
 MATERIALS AND RESEARCH DIVISION

QUAD 82 MAP SHEET 83122

ACC 2
 P.U.R.O
 DRILL LOG RECORD

PROJECT	SECOND HOBART CROSSING PHASE 1 - SITE INVESTIGATION	BORE No.	WA 1
Bore co-ordinates:	324638E 257171N E=524760N=258950	FILE-No.	Western Approach
Surface R.L.:	33.80	Datum:	State
Angle from horizontal:	90°	Direction:	-
		Sheet no.	1 of 1

Rock type and degree of weathering	Description Colour, Hardness, etc.	Log	Core loss Lift %	Core size Depth R.L.	Fracture log	C.O.C. R.C.O. Snacing	Discontinuities Joints, bedding, seams, faults Description Attitude, smoothness, filling content, aperture and coating	Drilling water loss	Water level	Remarks
------------------------------------	---------------------------------------	-----	---------------------	----------------------------	-----------------	-----------------------------	---	---------------------------	-------------	---------

20 14	1 4 16 64	25 75
0	5-50	
2	20-70	Close jointed some clay in joints 45° - 60°
4	20-100	
6	20-150	Joints limonite stained 45° - 60°
8	20-130	
10	50-240	Fewer joints
12	5-40	Close jointed some clay infill
14	60-220	
16	300	More massive joint sub- horizontal and 45°
18		END 16.44

Drill type	F20c	EXPLANATION 1. Fracture log Breaks in core per foot or diameter of fragments in feet Equivalent diameter, inches	Vertical scale	1 unit = 0.2m
Core barrel type	NMLC Triple tube		2. WEATHERING CW - Completely weathered SW - Slightly weathered MW - Moderately weathered FW - Fresh, with limonite stained joints Fr - Fresh	Logged
Driller	Mines Dept.		Drawn	W.K.
Comm'do	6-5-76		Date	11-6-76
Compl'd	25-5-76		Checked	