



Borehole No.

JK5P

1/4

S 41° 13.199'
E 146° 19.809'

BOREHOLE LOG

Client: CRADLE COAST WATER
Project: GEOTECHNICAL INVESTIGATION OF LANDSLIDE
Location: 9ML BIG KELCEY RESERVOIR, NEAR DEVONPORT, TASMANIA

Job No. 21508WH2 **Method:** SPIRAL AUGER
 HYDROPOWER SCOUT **R.L. Surface:** 109.57m
Date: 13-1-09 **Datum:** AHD
Logged/Checked by: A.J.H. /

Groundwater Record	SAMPLES			Field Tests	Depth (m)	Graphic Log	Unified Classification	DESCRIPTION	Moisture Condition/ Weathering	Strength/ Rel. Density	Hand Penetrometer Readings (kPa.)	Remarks
	ES	U50	DB									
DRY ON COMPLETION OF AUGERING					0		ML/CL	TOPSOIL: Silty clay, low plasticity, dark brown, with root fibres.	MC < PL			LEAF COVER
				N = 31 5,14,17	1			CLAYEY SILT/SILTY CLAY: low plasticity, brown mottled light brown, with roots (to 15mm diameter). as above, but without roots.	MC < PL	H	> 600 > 600 > 600	RESIDUAL
				SPT 17/150mm END	2			SILTSTONE: light grey brown. Sub-horizontally bedded.	XW	EL		VERY LOW 'TC' BIT RESISTANCE
					3			REFER TO CORED BOREHOLE LOG				
					4							
					5							
					6							
					7							

CORED BOREHOLE LOG

Client:	CRADLE COAST WATER	
Project:	GEOTECHNICAL INVESTIGATION OF LANDSLIDE	
Location:	9ML BIG KELCEY RESERVOIR, NEAR DEVONPORT, TASMANIA	
Job No. 21508WH2	Core Size: HQ	R.L. Surface: 109.57m
Date: 13-1-09	Inclination: VERTICAL	Datum: AHD
Drill Type: HYDROPOWER SCOUT	Bearing: -	Logged/Checked by: A.J.H./ <i>AJH</i>

Water Loss/Level	Barrel Lift	Depth (m)	Graphic Log	CORE DESCRIPTION Rock Type, grain characteristics, colour, structure, minor components.	Weathering	Strength	POINT LOAD STRENGTH INDEX $I_s(50)$	DEFECT DETAILS		
								DEFECT SPACING (mm)	DESCRIPTION	
									Type, inclination, thickness, planarity, roughness, coating.	Specific
		2								
		3		START CORING AT 3.00m						
		3		SILTSTONE: light grey brown mottled light orange brown, bedded at 0-5°.	XW	EL-VL	X		- J, 45°, P, S, IS	
		4					X			
		5					X		- J, 50°, P, S, IS - J, 60°, P, S, IS - J, 50°, P, S, IS - J, 30-50°, Un, S, IS - Be, 0°, P, S - J, 80°, P, S, IS - HEALED J, 55°, P, IS	
80% RET-URN		6					X		- HEALED J, 40-90°, Un, IS	
		7					X		- J, 45°, P, S, IS - J, 65°, P, S, IS - J, 55°, P, S, IS	
		8		SILTSTONE: light grey brown, bedded at 0-5°.		L	X		- J, 55°, P, S, IS - J, 58°, P, S, IS - J, 45-90°, Un, S, IS - J, 50°, P, S, IS	
		8.5		CORE LOSS 0.43m						
		9		SILTSTONE: light grey brown, fractured.	XW	EL			- J, 50°, P, R, IS	

COPYRIGHT



Borehole No.
JK5P
3/4

CORED BOREHOLE LOG

Client: CRADLE COAST WATER
Project: GEOTECHNICAL INVESTIGATION OF LANDSLIDE
Location: 9ML BIG KELCEY RESERVOIR, NEAR DEVONPORT, TASMANIA

Job No. 21508WH2 **Core Size:** HQ **R.L. Surface:** 109.57m
Date: 13-1-09 **Inclination:** VERTICAL **Datum:** AHD
Drill Type: HYDROPOWER SCOUT **Bearing:** - **Logged/Checked by:** A.J.H./*AJH*

Water Loss/Level	Barrel Lift	Depth (m)	Graphic Log	CORE DESCRIPTION Rock Type, grain characteristics, colour, structure, minor components.	Weathering	Strength	POINT LOAD STRENGTH INDEX $I_s(50)$	DEFECT DETAILS	
								DEFECT SPACING (mm)	DESCRIPTION Type, inclination, thickness, planarity, roughness, coating.
URN				SILTSTONE: light grey brown, fractured.	XW	EL	EL VL L M H VH EL	500 300 100 50 30 10	
FULL RET-URN		10							- J, 60°, P, S, IS
				SILTY CLAY: low plasticity, light grey brown.	MC < PL	(H)			
		11		CORE LOSS 0.34m					
				SILTY CLAY: low plasticity, light grey brown, with XW siltstone bands.	MC < PL	(H)			
		12		SILTSTONE: light grey brown, bedded at 0-10°.	XW	EL			- J, 70°, P, S, IS
				as above, but fractured.					- J, 60-90°, Un, S, IS
NO RET-URN		13		SILTSTONE: light grey brown, bedded at 0-5°.		VL	X		- J, 45°, P, S, IS
		14							- J, 80°, P, S
				CORE LOSS 0.10m					
		15		SILTSTONE: light grey brown, bedded at 0-5°.	XW	EL	X		- J, 40°, P, S, IS - J, 80°, P, S, IS
					DW	L-M			
					XW	EL			- Cr, 40m.t
				SILTY CLAY: low plasticity, light grey brown, with XW, EL siltstone bands.	MC > PL	(VSt)			



Borehole No.
JK5P
4/4

CORED BOREHOLE LOG

Client:	CRADLE COAST WATER	
Project:	GEOTECHNICAL INVESTIGATION OF LANDSLIDE	
Location:	9ML BIG KELCEY RESERVOIR, NEAR DEVONPORT, TASMANIA	
Job No. 21508WH2	Core Size: HQ	R.L. Surface: 109.57m
Date: 13-1-09	Inclination: VERTICAL	Datum: AHD
Drill Type: HYDROPOWER SCOUT	Bearing: -	Logged/Checked by: A.J.H. / gld

Water Loss/Level	Barrel Lift	Depth (m)	Graphic Log	CORE DESCRIPTION Rock Type, grain characteristics, colour, structure, minor components.	Weathering	Strength	POINT LOAD STRENGTH INDEX I _s (50)	DEFECT DETAILS		
								DEFECT SPACING (mm)	DESCRIPTION Type, inclination, thickness, planarity, roughness, coating.	
							EL VL L M H VH EH	500 300 100 50 30 10	Specific General	
				SILTSTONE: light brown, fractured.	DW	VL				
				as above, but dark grey, bedded at 0-5°.						
		17		SHALE: dark grey, with light grey laminae, bedded at 0-5°.	FR	M				
				CORE LOSS 0.07m						
		18		SILTSTONE: dark grey, with fine grained siltstone laminae, bedded at 0-5°.	FR	H				- J, 65-90°, Un, P, S - J, SUBVERTICAL, Un, S, IS - J, 45°, P, S, IS - J, 50°, P, S, IS - J, SUBVERTICAL, P, S, IS
NO RETURN		19								- J, 50°, P, S, IS
		20								- J, SUBVERTICAL, Un, P, S - J, 50°, Un, R
				END OF BOREHOLE AT 20.28m						VW PIEZOMETER INSTALLED TO 16.8m DEPTH. REFER TO TABLE E FOR INSTALLATION DETAILS
		21								
		22								

Jeffery and Katauskas Pty Ltd
CONSULTING GEOTECHNICAL AND ENVIRONMENTAL ENGINEERS

JOB No. 21508WH2 JK5P START CORING AT 3.00m





GRAPHIC LOG SYMBOLS FOR SOILS AND ROCKS


SOIL		ROCK		DEFECTS AND INCLUSIONS	
	FILL		CONGLOMERATE		CLAY SEAM
	TOPSOIL		SANDSTONE		SHEARED OR CRUSHED SEAM
	CLAY (CL, CH)		SHALE		BRECCIATED OR SHATTERED SEAM/ZONE
	SILT (ML, MH)		SILTSTONE, MUDSTONE, CLAYSTONE		IRONSTONE GRAVEL
	SAND (SP, SW)		LIMESTONE		ORGANIC MATERIAL
	GRAVEL (GP, GW)		PHYLLITE, SCHIST	OTHER MATERIALS	
	SANDY CLAY (CL, CH)		TUFF		CONCRETE
	SILTY CLAY (CL, CH)		GRANITE, GABBRO		BITUMINOUS CONCRETE, COAL
	CLAYEY SAND (SC)		DOLERITE, DIORITE		COLLUVIUM
	SILTY SAND (SM)		BASALT, ANDESITE		
	GRAVELLY CLAY (CL, CH)		QUARTZITE		
	CLAYEY GRAVEL (GC)				
	SANDY SILT (ML)				
	PEAT AND ORGANIC SOILS				



UNIFIED SOIL CLASSIFICATION TABLE

Field Identification Procedures (Excluding particles larger than 75 µm and basing fractions on estimated weights)		Group Symbols	Typical Names	Information Required for Describing Soils	Laboratory Classification Criteria					
Coarse-grained soils More than half of material is larger than 75 µm sieve size More than half of coarse fraction is larger than 4 mm sieve size	Gravels More than half of coarse fraction is larger than 4 mm sieve size	Clean gravels (little or no fines)	Wide range in grain size and substantial amounts of all intermediate particle sizes	GW	Well graded gravels, gravel-sand mixtures, little or no fines	<p>Determine percentages of gravel and sand from grain size curve Depending on percentage of fines (fraction smaller than 75 µm sieve size) coarse grained soils are classified as follows: Less than 5% GW, GP, SW, SP More than 5% GM, GC, SM, SC Borderline cases requiring use of that symbols</p> $C_U = \frac{D_{60}}{D_{10}} \text{ Greater than 4}$ $C_C = \frac{(D_{30})^2}{D_{10} \times D_{60}} \text{ Between 1 and 3}$ <p>Not meeting all gradation requirements for GW</p> <table border="1"> <tr> <td>Atterberg limits below "A" line, or PI less than 4</td> <td>Above "A" line with PI between 4 and 7 are borderline cases requiring use of dual symbols</td> </tr> </table> $C_U = \frac{D_{60}}{D_{10}} \text{ Greater than 6}$ $C_C = \frac{(D_{30})^2}{D_{10} \times D_{60}} \text{ Between 1 and 3}$ <p>Not meeting all gradation requirements for SW</p> <table border="1"> <tr> <td>Atterberg limits below "A" line or PI less than 5</td> <td>Above "A" line with PI between 4 and 7 are borderline cases requiring use of dual symbols</td> </tr> </table>	Atterberg limits below "A" line, or PI less than 4	Above "A" line with PI between 4 and 7 are borderline cases requiring use of dual symbols	Atterberg limits below "A" line or PI less than 5	Above "A" line with PI between 4 and 7 are borderline cases requiring use of dual symbols
		Atterberg limits below "A" line, or PI less than 4	Above "A" line with PI between 4 and 7 are borderline cases requiring use of dual symbols							
		Atterberg limits below "A" line or PI less than 5	Above "A" line with PI between 4 and 7 are borderline cases requiring use of dual symbols							
		Predominantly one size or a range of sizes with some intermediate sizes missing	GP	Poorly graded gravels, gravel-sand mixtures, little or no fines						
	Nonplastic fines (for identification procedures see ML below)	GM	Silty gravels, poorly graded gravel-sand-silt mixtures							
	Plastic fines (for identification procedures, see CL below)	GC	Clayey gravels, poorly graded gravel-sand-clay mixtures							
	Sands More than half of coarse fraction is smaller than 4 mm sieve size	Clean sands (little or no fines)	Wide range in grain sizes and substantial amounts of all intermediate particle sizes	SW	Well graded sands, gravelly sands, little or no fines					
			Predominantly one size or a range of sizes with some intermediate sizes missing	SP	Poorly graded sands, gravelly sands, little or no fines					
		Sands with fines (appreciable amount of fines)	Nonplastic fines (for identification procedures, see ML below)	SM	Silty sands, poorly graded sand-silt mixtures					
			Plastic fines (for identification procedures, see CL below)	SC	Clayey sands, poorly graded sand-clay mixtures					
Identification Procedures on Fraction Smaller than 380 µm Sieve Size										
Silty and clays liquid limit less than 50			Dry Strength (crushing characteristics)	None to slight	Quick to slow	None	ML	Inorganic silts and very fine sands, rock flour, silty or clayey fine sands with slight plasticity		
	Medium to high	None to very slow		Medium	CL	Inorganic clays of low to medium plasticity, gravelly clays, sandy clays, silty clays, lean clays				
	Slight to medium	Slow		Slight	OL	Organic silts and organic silt-clays of low plasticity				
	Silty and clays liquid limit greater than 50	Slight to medium	Slow to none	Slight to medium	MH	Inorganic silts, micaceous or diatomaceous fine sandy or silty soils, elastic silts				
		High to very high	None	High	CH	Inorganic clays of high plasticity, fat clays				
		Medium to high	None to very slow	Slight to medium	OH	Organic clays of medium to high plasticity				
Highly Organic Soils	Readily identified by colour, odour, spongy feel and frequently by fibrous texture		PI	Peat and other highly organic soils						

Use grain size curve in identifying the fractions as given under field identification

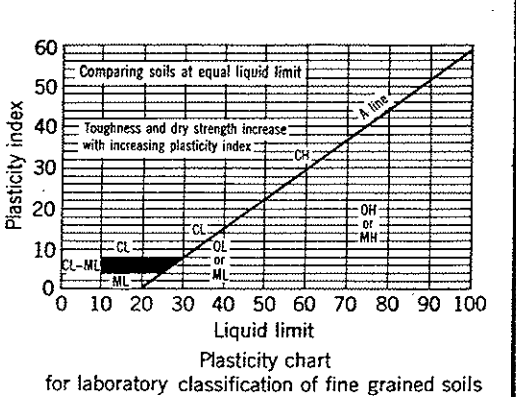

NOTE: 1) Soils possessing characteristics of two groups are designated by combinations of group symbols (e.g. GW-GC, well graded gravel-sand mixture with clay fines).

2) Soils with liquid limits of the order of 35 to 50 may be visually classified as being of medium plasticity.



LOG SYMBOLS

LOG COLUMN	SYMBOL	DEFINITION	
Groundwater Record		Standing water level. Time delay following completion of drilling may be shown.	
		Extent of borehole collapse shortly after drilling.	
		Groundwater seepage into borehole or excavation noted during drilling or excavation.	
Samples	ES	Soil sample taken over depth indicated, for environmental analysis.	
	U50	Undisturbed 50mm diameter tube sample taken over depth indicated.	
	DB	Bulk disturbed sample taken over depth indicated.	
	DS	Small disturbed bag sample taken over depth indicated.	
	ASB	Soil sample taken over depth indicated, for asbestos screening.	
	ASS	Soil sample taken over depth indicated, for acid sulfate soil analysis.	
	SAL	Soil sample taken over depth indicated, for salinity analysis.	
Field Tests	N = 17 4, 7, 10	Standard Penetration Test (SPT) performed between depths indicated by lines. Individual figures show blows per 150mm penetration. 'R' as noted below.	
	N _c =	5	Solid Cone Penetration Test (SCPT) performed between depths indicated by lines. Individual figures show blows per 150mm penetration for 60 degree solid cone driven by SPT hammer. 'R' refers to apparent hammer refusal within the corresponding 150mm depth increment.
		7	
		3R	
VNS = 25 PID = 100	Vane shear reading in kPa of Undrained Shear Strength. Photoionisation detector reading in ppm (Soil sample headspace test).		
Moisture Condition (Cohesive Soils) (Cohesionless Soils)	MC > PL	Moisture content estimated to be greater than plastic limit.	
	MC ≈ PL	Moisture content estimated to be approximately equal to plastic limit.	
	MC < PL	Moisture content estimated to be less than plastic limit.	
	D	DRY - runs freely through fingers.	
	M	MOIST - does not run freely but no free water visible on soil surface.	
	W	WET - free water visible on soil surface.	
Strength (Consistency) Cohesive Soils	VS	VERY SOFT - Unconfined compressive strength less than 25kPa	
	S	SOFT - Unconfined compressive strength 25-50kPa	
	F	FIRM - Unconfined compressive strength 50-100kPa	
	St	STIFF - Unconfined compressive strength 100-200kPa	
	VSt	VERY STIFF - Unconfined compressive strength 200-400kPa	
	H	HARD - Unconfined compressive strength greater than 400kPa	
	()	Bracketed symbol indicates estimated consistency based on tactile examination or other tests.	
Density Index/ Relative Density (Cohesionless Soils)	VL	Very Loose < 15	
	L	Loose 15-35	
	MD	Medium Dense 35-65	
	D	Dense 65-85	
	VD	Very Dense > 85	
	()	Bracketed symbol indicates estimated density based on ease of drilling or other tests.	
Hand Penetrometer Readings	300	Numbers indicate individual test results in kPa on representative undisturbed material unless noted otherwise.	
	250		
Remarks	'V' bit	Hardened steel 'V' shaped bit.	
	'TC' bit	Tungsten carbide wing bit.	
	T 60	Penetration of auger string in mm under static load of rig applied by drill head hydraulics without rotation of augers.	

Jeffery and Katauskas Pty Ltd

CONSULTING GEOTECHNICAL AND ENVIRONMENTAL ENGINEERS
 ABN 17 003 550 801



LOG SYMBOLS

ROCK MATERIAL WEATHERING CLASSIFICATION

TERM	SYMBOL	DEFINITION
Residual Soil	RS	Soil developed on extremely weathered rock; the mass structure and substance fabric are no longer evident; there is a large change in volume but the soil has not been significantly transported.
Extremely weathered rock	XW	Rock is weathered to such an extent that it has "soil" properties, ie it either disintegrates or can be remoulded, in water.
Distinctly weathered rock	DW	Rock strength usually changed by weathering. The rock may be highly discoloured, usually by ironstaining. Porosity may be increased by leaching, or may be decreased due to deposition of weathering products in pores.
Slightly weathered rock	SW	Rock is slightly discoloured but shows little or no change of strength from fresh rock.
Fresh rock	FR	Rock shows no sign of decomposition or staining.

ROCK STRENGTH

Rock strength is defined by the Point Load Strength Index (Is 50) and refers to the strength of the rock substance in the direction normal to the bedding. The test procedure is described by the International Journal of Rock Mechanics, Mining, Science and Geomechanics. Abstract Volume 22, No 2, 1985.

TERM	SYMBOL	Is (50) MPa	FIELD GUIDE
Extremely Low:	EL	0.03	Easily remoulded by hand to a material with soil properties.
Very Low:	VL		May be crumbled in the hand. Sandstone is "sugary" and friable.
Low:	L	0.3	A piece of core 150mm long x 50mm dia. may be broken by hand and easily scored with a knife. Sharp edges of core may be friable and break during handling.
Medium Strength:	M		A piece of core 150mm long x 50mm dia. can be broken by hand with difficulty. Readily scored with knife.
High:	H	3	A piece of core 150mm long x 50mm dia. core cannot be broken by hand, can be slightly scratched or scored with knife; rock rings under hammer.
Very High:	VH		A piece of core 150mm long x 50mm dia. may be broken with hand-held pick after more than one blow. Cannot be scratched with pen knife; rock rings under hammer.
Extremely High:	EH	10	A piece of core 150mm long x 50mm dia. is very difficult to break with hand-held hammer. Rings when struck with a hammer.

ABBREVIATIONS USED IN DEFECT DESCRIPTION

ABBREVIATION	DESCRIPTION	NOTES
Be	Bedding Plane Parting	Defect orientations measured relative to the normal to the long core axis (ie relative to horizontal for vertical holes)
CS	Clay Seam	
J	Joint	
P	Planar	
Un	Undulating	
S	Smooth	
R	Rough	
IS	Ironstained	
XWS	Extremely Weathered Seam	
Cr	Crushed Seam	
60t	Thickness of defect in millimetres	