


**WELL COMPLETION LOG
YURONGI-1**

CONCESSION: T/4P STATE: TASMANIA, AUSTRALIA BASIN: BASS
 LOCATION: Lat. 36° 29.63' S X 437,207 mE.
 Long. 146° 15' 58.866" E Y 5,580,286 mN.
 ELEVATION: G.L. 0 K.B. 32' WATER DEPTH: 272'
 SPUDDED: 3-7-73 RIG RELEASED: 14-7-73 DRILLED BY: "GLOBAL MARINE"
 I.P. ESTABLISHED: Y STATUS: PLUGGED & ABANDONED
 CLASSIFICATION: Unsuccessful New Field Wildcat PLUGGED BACK T.D.: 405'
 TOTAL DEPTH: 8,000' PLUGGED PLUGGED & ABANDONED

CASING AND TUBING			PLUGS		PERFORATIONS			
SIZE	SET AT SX. CMT	FORMATION	FROM	TO	SX. CMT	FROM	TO	No./FT
13-5/8"	2949'	800	MIOCENE	650	405	185		
				3080	2780	250		

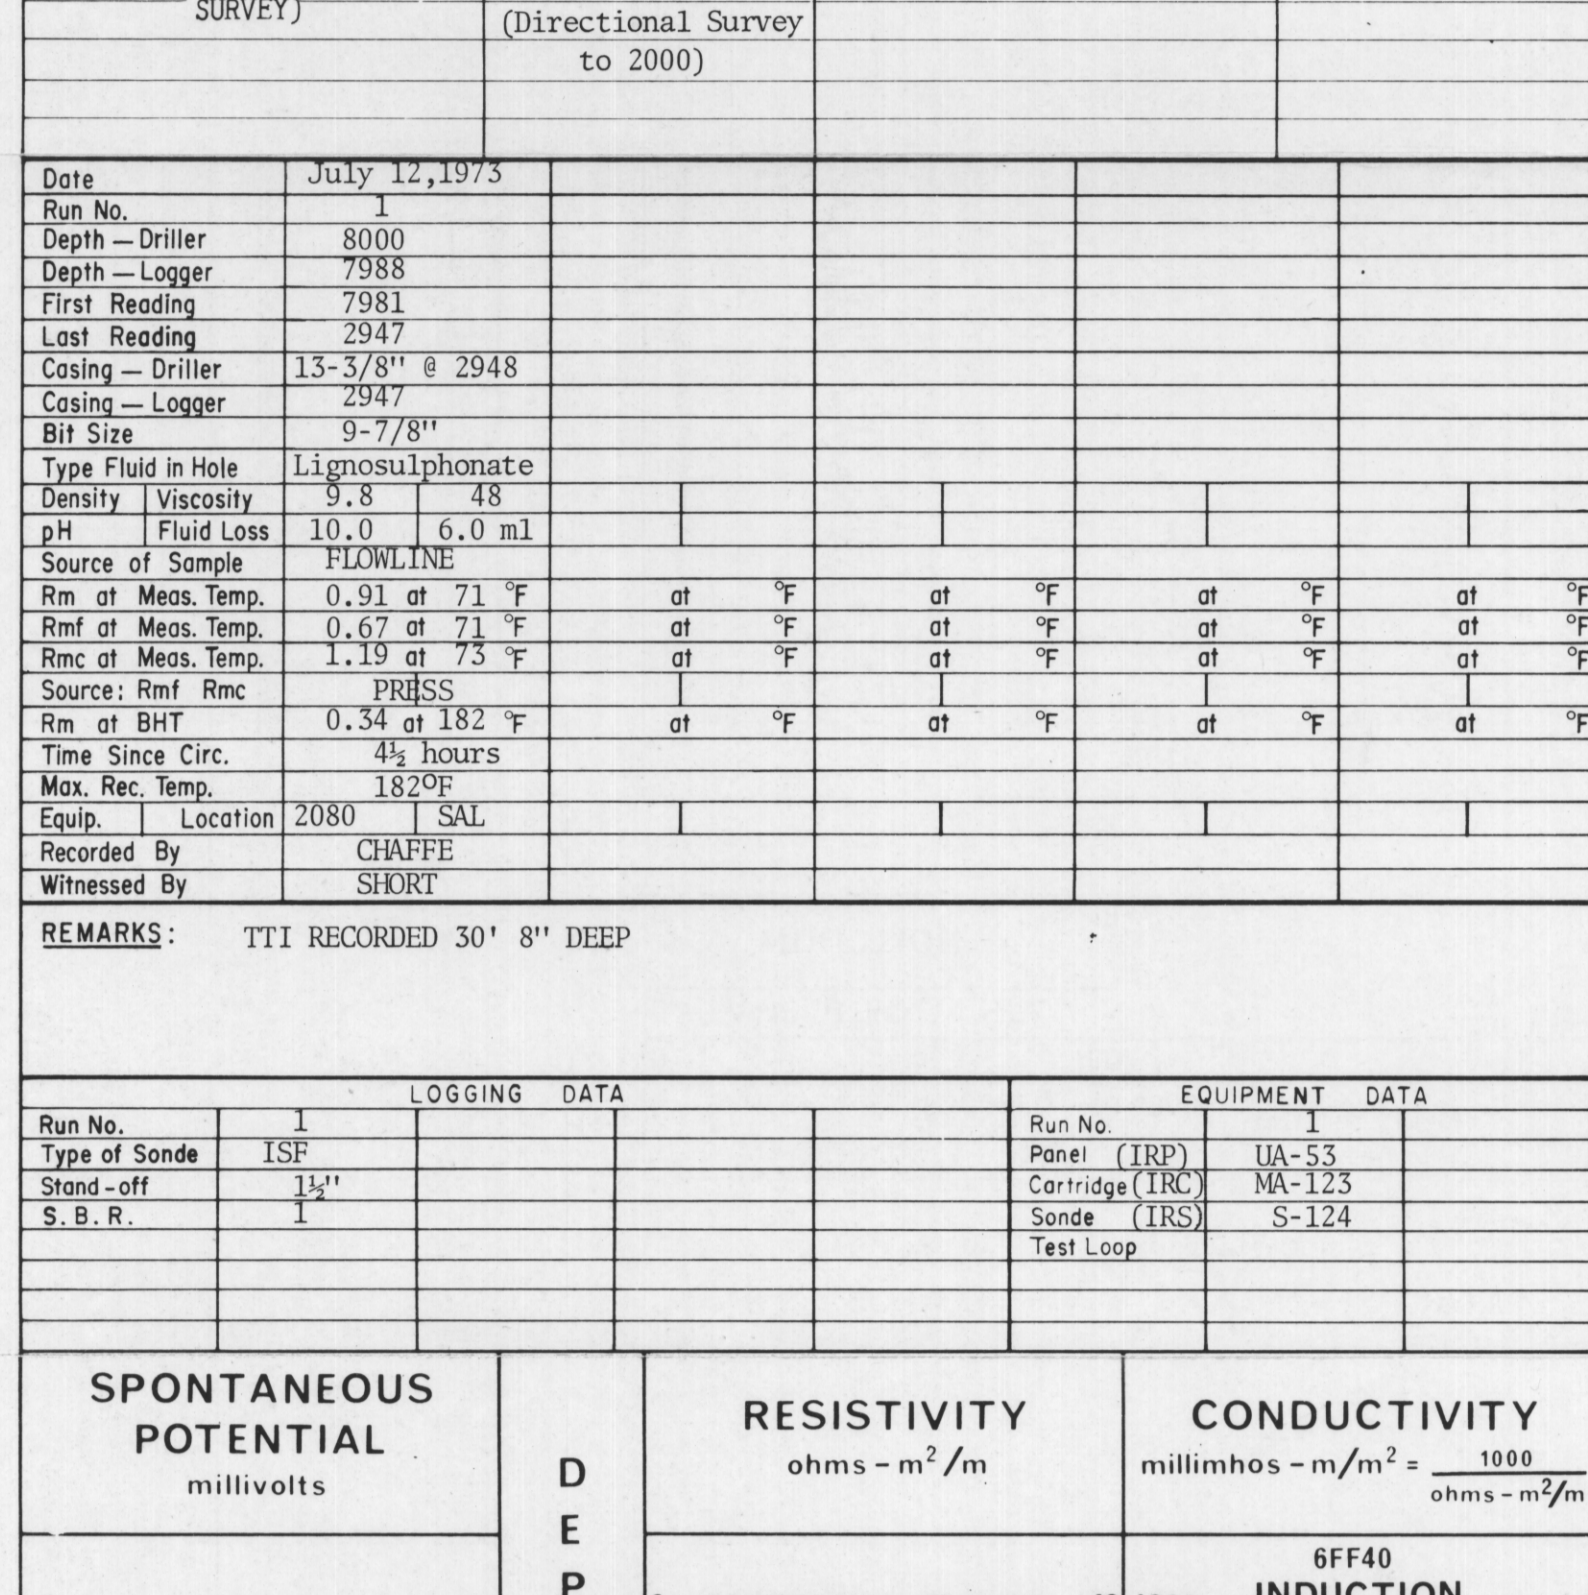

- LEGEND**
- SHOW OR STAIN
 - HYDROCARBON CUT
 - FLUORESCENCE
 - GAS SHOW
 - ABOVE SYMBOLS MAY BE COMBINED
 - OPEN HOLE DST
 - OPEN HOLE SWAB OF FLOW TEST
 - WIRELINE TEST
 - SWC WITH RECOVERY
 - SWC WITH NO RECOVERY
 - WF - WS/FIRE
 - SWC WITH SHOW
 - BLOWOUT OF GAS
 - WATER FLOW
 - LOSS OF DRILLING FLUID AND PERCENTAGE
 - YV LOST CIRCULATION COMPLETELY
 - QSW MUD TYPE, WEIGHT AND OIL CONTENT
 - SEVATION SURVEY
 - DIRECTIONAL SURVEY
 - NORMAL FAULT WITH DISPLACEMENT
 - REVERSE FAULT WITH DISPLACEMENT
 - DIPMETER SURVEY WITH DIP DIRECTION AND ANGLE
 - OIL PRODUCTION
 - GAS PRODUCTION
 - CONDENSATE PRODUCTION
 - WATER PRODUCTION
 - INTERPRETED OIL PRODUCTIVE
 - INTERPRETED GAS PRODUCTIVE
 - INTERPRETED WATER-BEARING
 - INTERPRETED CONDENSATE PROD.
 - 60 - 90° DEF. PULLED OFF
 - DB - DAMAGED BULLET
 - LOST CIRCULATION COMPLETELY
 - DIP 42.25°

WIRE LINE LOGGING SERVICES

LOG	INTERVAL	LOG	INTERVAL
IPS/SORIC	7981 - 2947		
PSC/CNL/GR	7981 - 4400		
HFT (W/DIRECTIONAL SURVEY)	7950 - 4400 (OR TO 304)		
	7950 - 4400		
		(Directional Survey to 2000)	

Date	Run No.	Depth - Driller	Depth - Logger	First Reading	Last Reading	Casing - Driller	Casing - Logger	Bit Size	Type Fluid in Hole	Density - Viscosity	pH	Fluid Loss	Source of Sample	Rim of Meas. Temp.	End of Meas. Temp.	Rim of Meas. Temp.	Time Since Circ.	Min. Rec. Temp.	Location	Recorded By	Witnessed By
July 15, 1973	8000	8000	7985	2984	2977	13-5/8" 8' 2948	2947	9'-7 7/8"	Light green phosphate	1.05	18	1.0	74.0 ML	at 7'	at 7'	at 7'	at 7'	at 7'	at 7'	CHUFFE	SAL
														at 7'	at 7'	at 7'	at 7'	at 7'			

REMARKS: TTI RECORDED 30" 8" DEEP

LOGGING DATA		EQUIPMENT DATA	
Run No.	131	Run No.	11A-53
Type of Sonda	LS	Reel	11A-53
Stand-off	1"	Cartridge (lbs)	MA-123
S. B. N.		Spool (lbs)	SC-324
		Tool Joint	442,100

