CSU

COMPANY: SENATUS PETROLEUM NTL. LTD.
WELL: FIFITA 1
FIELD:
COUNTY: BLOCK WA-9-R
STATE: WESTERN AUSTRALIA
LOCATION: 1000 FSL & 1000 FEL
SEC TWP RGE:
PERMANENT DATUM: MSL
LOG MEASURED FROM: KB 25.0 M
DRILLING MEASURED FROM: KB 25.0 M

Elevations: KB 25.0 M
GL -999.0 M

Date: 07 MAY 1988
Run No.: ONE
Depth-Driller: 3100.0 M
Depth-Logger: 3100.0 M
Bottom Logged Interval: 3100.0 M
Top Logged Interval: 2000.0 M
Type Fluid in Hole: SEAWATER POLYMER
Salinity: 32.0 PPT
Density: 1.04 SG
Level: FULL HOLE
Max. Recorded Temp.: 110.0 DEGC @ 3100.0 M
Estimated Surface Temp.: 25.0 DEGC @ 0.0 M
Time Since Circulation: 6.00 HR @ 3100.0 M
Time on Bottom: 7.00 HR @ 3100.0 M
Max. Rec. Temp.: 110.0 DEGC @ 3100.0 M
Equipment Number: 0301
Location: PERTH
Recorded By: R.J. ST
Witnessed By: M.A.MOSS

Run No.: ONE
Depth-Driller: 3100.0 M
Depth-Logger: 3100.0 M
Bottom Logged Interval: 3100.0 M
Top Logged Interval: 2000.0 M
Type Fluid in Hole: SEAWATER POLYMER
Salinity: 32.0 PPT
Density: 1.04 SG
Level: FULL HOLE
Max. Recorded Temp.: 110.0 DEGC @ 3100.0 M
Estimated Surface Temp.: 25.0 DEGC @ 0.0 M
Time Since Circulation: 6.00 HR @ 3100.0 M
Time on Bottom: 7.00 HR @ 3100.0 M
Equipment Number: 0301
Location: PERTH
Recorded By: R.J. ST
Witnessed By: M.A.MOSS

EQUIPMENT SUMMARY:

RUN ONE: BHC SONIC SL-5 No. 1 Pos. SLS & Pos.
RUN ONE: DLL-MSFL SLS-5 No. 1 Pos. DLL-MSFL & Pos.

DISCLAIMER

THE INTERPRETATIONS GIVEN IN THIS LOG ARE BASED ON INFORMATION SUPPLIED BY THE CLIENT AND ON ELECTRICAL OR OTHER MEASUREMENTS MADE BY SCHLUMBERGER. SCHLUMBERGER CANNOT GUARANTEE THE ACCURACY OR CORRECTNESS OF ANY INTERPRETATION AND CANNOT, AND DOES NOT, ACCEPT RESPONSIBILITY FOR ANY LOSS, DAMAGE OR EXPENSE INCURRED AS A RESULT OF ANY INTERPRETATION MADE BY ANY OF ITS OFFICERS, AGENTS OR EMPLOYEES. THESE INTERPRETATIONS ARE ALSO SUBJECT TO OUR GENERAL TERMS AND CONDITIONS AS SET OUT IN OUR CURRENT PRICE SCHEDULE.

AFTER SURVEY DRL SHOES SUMMARY

PERFORMANCE - RESULTS
PROGRAMMED LOGS TRAVELLED 25.0M FRACTUTE

BITS

TOOL CHECK

BITSIZE	TYPE	FROM	TO
12.25		0.0	1000.0
8.5		1000.0	3100.0

BITSIZE	TYPE	FROM	TO
12.25		0.0	1000.0
8.5		1000.0	3100.0

BHC.CSM.[1]	60.00	BHC3	BHC.GR(API)----------60.00
DLL.CSM.[1]	60.00	C_DIS1	DLM.CSM(M)----------3100
SLS.CSM.[1]	60.00		SFLU.CSM(M)----------3100
GR.CSM.[1]	60.00		SFLA.CSM(M)----------3100

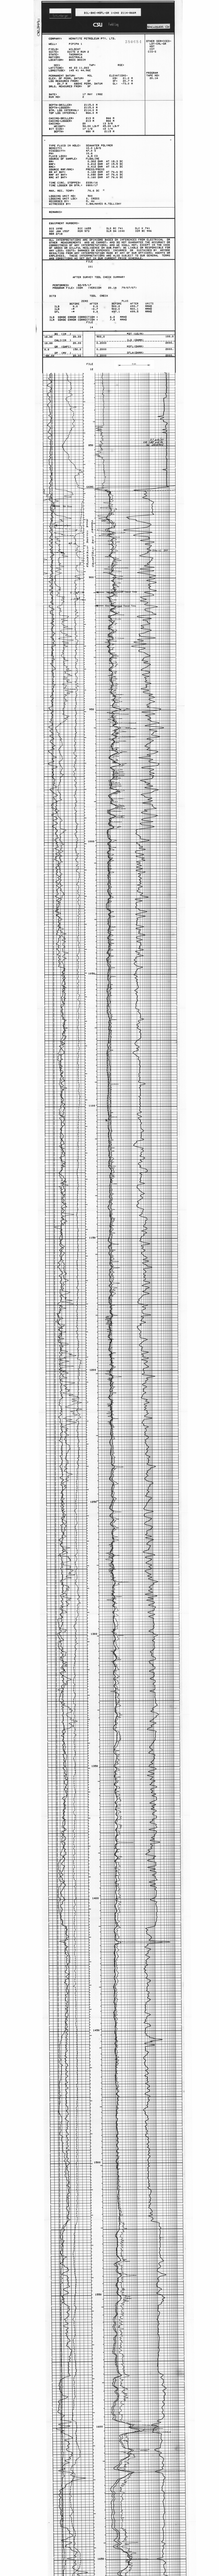
TVD
1:500
1:500
1:500